


Chip Type

GREEN CAP SMD Low ESR 125°C 1000hours Anti-cleaning solvent

- Super low ESR and high ripple current are realized.
- Guaranteed 125°C, 1000 hours.



Marking color : Blue print

Specifications


Item	Performance									
Category temperature range (°C)	−55 to +125									
Tolerance at rated capacitance (%)	± 20 (20°C, 120Hz)									
Leakage current (μA) *Note	Rated voltage (V) Leakage current (μA)	2.5 to 20 Less than 0.2 CV (after 2 minutes) 25 Less than 0.5 CV (after 2 minutes)								
C : Rated capacitance (μF) , V : Rated voltage (V)		(20°C)								
Tangent of the loss angle ($\tan\delta$)	Less than 0.12 (20°C, 120Hz)									
Characteristics at high and low temperature	Impedance ratio (max.) <table border="1"> <tr> <td>Z−25°C/Z+20°C</td> <td>1.15</td> </tr> <tr> <td>Z−55°C/Z+20°C</td> <td>1.25</td> </tr> </table> (100kHz)		Z−25°C/Z+20°C	1.15	Z−55°C/Z+20°C	1.25				
Z−25°C/Z+20°C	1.15									
Z−55°C/Z+20°C	1.25									
Endurance (125°C) (Applied ripple current)	Test time Leakage current Percentage of capacitance change Tangent of the loss angle ESR change									
Bias Humidity 60°C, 90 to 95%RH	Test time Leakage current Percentage of capacitance change Tangent of the loss angle ESR change									
Characteristics of applied surge voltage	The capacitors shall be subject to 1000 cycles each consisting of charge with the surge voltage specified at 125°C for 30 seconds through a protective resistor ($R_c=1\text{k}\Omega$) in 6 minutes per cycle. Surge voltage : 1.15 times of rated voltage <table border="1"> <tr> <td>Leakage current</td> <td>The initial specified value or less</td> </tr> <tr> <td>Percentage of capacitance change</td> <td>Within $\pm 20\%$ of initial value</td> </tr> <tr> <td>Tangent of the loss angle</td> <td>150% or less of the initial specified value</td> </tr> <tr> <td>ESR change</td> <td>150% or less of the initial specified value</td> </tr> </table>		Leakage current	The initial specified value or less	Percentage of capacitance change	Within $\pm 20\%$ of initial value	Tangent of the loss angle	150% or less of the initial specified value	ESR change	150% or less of the initial specified value
Leakage current	The initial specified value or less									
Percentage of capacitance change	Within $\pm 20\%$ of initial value									
Tangent of the loss angle	150% or less of the initial specified value									
ESR change	150% or less of the initial specified value									
Failure rate	0.5% per 1000 hours maximum (Confidence level 60% at 125°C)									

*Note : If any doubt arises, measure the leakage current after following voltage application treatment.

Voltage application treatment : DC rated voltage are applied to the capacitors for 120 minutes at 125°C.

Outline Drawing

Unit : mm

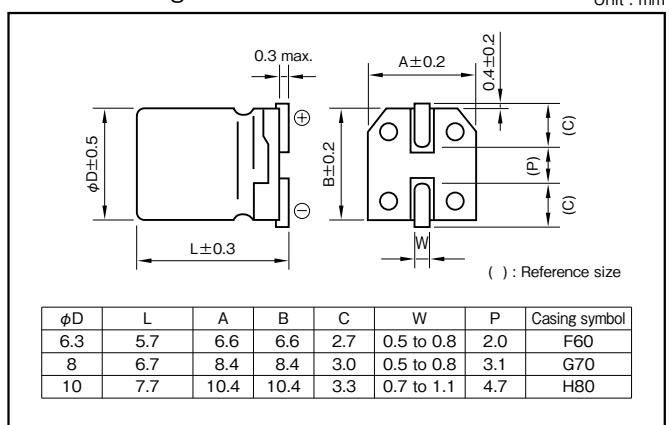

Part numbering system (example : 4V150μF)

PVK	—	4	V	151	M	F60	E	—	[]
Series code		Rated voltage symbol	Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol	Taping symbol			

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)	2.5			4			6.3			10			16			
	Item	Case	ESR	Rated ripple current												
		φD×L (mm)	(mΩ max.)	(mA rms)	φD×L (mm)	(mΩ max.)	(mA rms)	φD×L (mm)	(mΩ max.)	(mA rms)	φD×L (mm)	(mΩ max.)	(mA rms)	φD×L (mm)	(mΩ max.)	(mA rms)
33	—	—	—	—	—	—	—	—	—	—	—	—	—	6.3×5.7	37	590
39	—	—	—	—	—	—	—	—	—	—	—	—	—	6.3×5.7	37	590
47	—	—	—	—	—	—	—	—	—	—	6.3×5.7	31	680	6.3×5.7	37	590
56	—	—	—	—	—	—	—	—	—	—	6.3×5.7	31	680	—	—	—
68	—	—	—	—	—	—	6.3×5.7	27	720	—	—	—	—	—	—	—
82	—	—	—	—	—	—	6.3×5.7	27	720	—	—	—	8×6.7	30	830	
100	—	—	—	6.3×5.7	26	770	6.3×5.7	27	720	8×6.7	27	880	8×6.7	30	830	
120	—	—	—	—	—	—	6.3×5.7	27	720	8×6.7	27	880	—	—	—	
150	—	—	—	6.3×5.7	26	770	8×6.7	25	960	8×6.7	27	880	10×7.7	26	930	
180	—	—	—	—	—	—	—	—	—	—	—	—	10×7.7	26	930	
220	6.3×5.7	25	770	8×6.7	25	960	8×6.7	25	960	10×7.7	24	1010	—	—	—	
270	—	—	—	—	—	—	—	—	—	10×7.7	24	1010	—	—	—	
330	8×6.7	23	960	8×6.7	25	960	10×7.7	20	1100	10×7.7	24	1010	—	—	—	
470	8×6.7	23	960	10×7.7	20	1100	10×7.7	20	1100	—	—	—	—	—	—	
560	8×6.7	23	960	—	—	—	—	—	—	—	—	—	—	—	—	
680	—	—	—	10×7.7	20	1100	—	—	—	—	—	—	—	—	—	
1000	10×7.7	19	1100	—	—	—	—	—	—	—	—	—	—	—	—	

Rated voltage (V)	20			25			
	Item	Case	ESR	Rated ripple current	Case	ESR	Rated ripple current
		φD×L (mm)	(mΩ max.)	(mA rms)	φD×L (mm)	(mΩ max.)	(mA rms)
10	—	—	—	6.3×5.7	65	500	
22	6.3×5.7	50	590	8×6.7	50	600	
39	8×6.7	45	780	10×7.7	45	700	
47	8×6.7	45	780	—	—	—	
82	10×7.7	40	820	—	—	—	

(Note) Rated ripple current : 125°C, 100kHz ; ESR : 20°C, 100kHz