ELNA

Electronic Components

High Quality

CAPACITORS

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS
ALUMINUM ELECTROLYTIC CAPACITORS WITH CONDUCTIVE POLYMER SOLID ELECTROLYTE
ALUMINUM ELECTROLYTIC CAPACITORS
ELECTRIC DOUBLE LAYER CAPACITORS "DYNACAP®"
PLASTIC FILM CAPACITORS

ELNA CO., LTD.

CAT.No.2019/2020E

Certifications of Quality Management System (as of Dec. 2018)

Factory	Applicable Standard	Certification Number	Item	Applicable Organization
ELNA TOHOKU CO., LTD. AOMORI Factory (Japan) ELNA CO., LTD. SHIRAKAWA Tech. (Japan)	ISO 9001	JP05/060268	Aluminum electrolytic capacitors Conductive Polymer Hybrid Aluminum Electrolytic Capacitors Aluminum Electrolytic Capacitors With Conductive Polymer Solid Electrolyte Electric double layer capacitors	SGS
	IATF 16949	IATF0282303 SGS JP14/062589	Aluminum electrolytic capacitors Conductive Polymer Hybrid Aluminum Electrolytic Capacitors Aluminum Electrolytic Capacitors With Conductive Polymer Solid Electrolyte Electric double layer capacitors	SGS
TANIN ELNA CO., LTD. (Thailand)	IATF 16949	IATF0320356 44 111 060686	Aluminum electrolytic capacitors Electric double layer capacitors	TÜV
	ISO 9001	44 100 990506	Aluminum electrolytic capacitors Electric double layer capacitors	TÜV
ELNA-SONIC SDN. BHD. (Malaysia)	IATF 16949	IATF0336376 17318-T	Aluminum electrolytic capacitors	Kiwa
	ISO 9001	IAF19, 22 17318-A	Aluminum electrolytic capacitors	Kiwa

Certifications of Environmental Management System (as of Nov. 2018)

Factory	Applicable Standard	Certification Number	Applicable Organization
ELNA TOHOKU CO., LTD. AOMORI Factory (Japan)	ISO 14001	JQA-EM2918	Japan Quality Assurance (JQA)
TANIN ELNA CO., LTD. (Thailand)	ISO 14001	04104 990506	TÜV
ELNA-SONIC SDN. BHD. (Malaysia)	ISO 14001	MY03/60718	SGS

Please read the following warning and cautions !!

The Electronic components shown in this catalog are designed and produced mainly for such general purpose electronic equipment as audio and visual equipment, home appliances, office equipment and information processing and communication equipment.

If you wish to use these components in medical equipment, transportation equipment, (automotive, train, ships, etc), aircraft, spacecraft, security systems or other equipment that requires high security application, you are required to confirm application through your own testing and own judgment.

Regardless of a component intended use, if high safety application is required, it is recommended that you shall establish a protective or redundant circuit and shall conduct own evaluation test.

It is highly recommended that you shall follow our “Cautions for using”

Also it is recommended that you shall obtain technical specifications from Elna Co., Ltd to ensure that the component is suitable for your intended use.
It is not our responsibility for any kind of problems without technical specifications.

Specifications and dimensions shown in this catalog are subject to change without prior notice.

Be sure to read “Cautions for Using Electrolytic Capacitors”, before using those products.

1 Aluminum Electrolytic Capacitors — 5

Conductive Polymer Hybrid Aluminum Electrolytic Capacitors

Aluminum Electrolytic Capacitors With Conductive Polymer Solid Electrolyte — 23

Chip Type Aluminum Electrolytic Capacitors — 55

Miniature Type Aluminum Electrolytic Capacitors — 99

Large Capacitance Aluminum Electrolytic Capacitors — 155

Aluminum Electrolytic Capacitors for Audio — 207

2 Electric Double Layer Capacitors “DYNACAP” — 231

3 Plastic film Capacitors — 273

■ "GREEN CAP"

"GREEN CAP", ELNA considers the global environment and it is a product that doesn't use the hazardous substance and "Lead Free" in the plating of terminals and outer Sleeves.
The product in this catalog is 'GREEN CAP'.

The hazardous substance is
Pb : lead, Cr^{6+} : hexavalent chromium, Hg : mercury and Cd : cadmium,
PBB : the polybrominated biphenyl, PBDE : the polybromo-diphenyl ether,

■Regarding to various environmental Regulations

- It suits "EU RoHS Directives".
- According to the content of RIP3.8TGD(Technical Guidance Document which is published on 26 May 2008), our electronic components are "articles without any intended release".
  Therefore they are not applicable for "Registration" for EU REACH Regulation Article 7 (1).
  ELNA develops the products without substance of very high concern(SVHC). DEHP(CASNo.117-81-7) was contained as some covering material.
- If you need "Halogen-Free" products, please consult with us.

Terminal area plating material and sleeve material

● Aluminum (Polymer hybrid,Conductive Polymer Solid Electrolyte) electrolytic capacitors

Category		Terminal area plating	Plating thickness	Sleeve
SMD (Chip type)	φ3 to 6.3	Sn-Bi	12µm	Sleeve less
	φ8,10	Sn-Bi	12µm	Sleeve less (or PET)
	φ12.5	Sn 100%	12µm	Sleeve less (or PET)
	φ16 to 18	Sn 100%	12µm	Sleeve less
	Supplementary terminal of RT* type	Sn 100%	12µm	Sleeve less (or PET)
Lead terminal		Sn 100%	12µm	Sleeve less (or PET)
Snap-in		Sn 100%	12µm	PET
Screw terminal		—		PET

● Electric double layer capacitors

Category			Terminal area plating	Plating thickness	Sleeve
Coin cell	SMD	Single cell	Sn 100% or Sn+Cu	5µm	Sleeve less
		Piled cell	Sn 100%	5µm	PET
	Lead type		Sn 100%	5µm	PET
Large capacitance	Lead terminal		Sn 100%	12µm	PET
	Snap-in terminal		Sn 100%	12µm	PET

Note : Sn : Tin Bi : Bismuth Cu : Copper
Please inquire when hoping excluding the above-mentioned terminal plating and sleeve.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ About the Sn whisker

1. Sn whisker-generating mechanism on the lead wire

   On the surface of the lead wire, Sn and aluminum will get mixed instead of getting dissolved.
   The surface condition is complex, aluminum will expand due to the heat and humid causing the oxidation and hydration. This reaction will cause the inner stress and influence the development of the whisker.

2. Generation control of the Sn whisker

   In the past, Sn whisker was reduced by adding a lead(Pb). Aluminum electrolytic capacitor was also using the Sn-plate with Pb on the lead wire.
   But due to environmental regulation such as the “ELV” and “RoHS”, Pb was strictly prohibited since 2000.
   Lead wire not containing the Pb was used, which caused the Sn whisker problem to happen again.
   Since Sn whisker is influenced by the mixture of aluminum, method of reducing the aluminum on the welding surface was to clean the lead terminal using the alkali.
   However since the welding area of the large case size is larger compared to the small ones, whisker will generate even if it is cleaned by alkali. This whisker will scatter outside of the capacitor and potentially cause the short-circuit. Countermeasure of keeping the whisker inside the capacitor is being discussed.

3. Prevention of scattering of Sn whisker

   In the past Sn-plate with Pb was used and recently plate with Bi is being introduced to prevent the whisker from generating. However the whisker will still generate under the temperature and moisture condition.
   Therefore, the current method of preventing the whisker will not completely prevent the whisker from generating.

   In our company, we are developing and supplying products with design of preventing the whisker from scattering outside the capacitor.

   This design corresponds to series such as the RJD and RJE for 105°C use, RKD and RPK for 125°C use.

   If it is required for the other series, please feel free to make an inquiry.

Sectional view of capacitor	
Standard type	Whisker proof type
 Rubber hole Not covered	 Rubber hole covered

■ Ordering Information

Please order by the multiples of the minimum order quantity (MOQ).

Aluminum Electrolytic Capacitors

Classification		Case Size φD×L (mm)	Quantity (PCS.) Long lead (Q'ty/Bag)	Long lead MOQ/Box	Forming lead (Q'ty/Bag)	Forming lead MOQ/Box	Taping (flat box) MOQ/Box	Taping (reel) MOQ/Reel	Taping (reel) (Q'ty/Box)
Aluminum Electrolytic Capacitors With Conductive Polymer Solid Electrolyte Conductive Polymer Hybrid Aluminum Electrolytic Capacitors	Chip Type	φ5 to φ6.3×4.0 to 7.7	–	–	–	–	–	1,000	5,000
		φ8×6.7 to 7.7	–	–	–	–	–	1,000	5,000
		φ8×8.7 to 10.5,φ10×7.7 to 10.5	–	–	–	–	–	500	2,000
		φ10×12.5	–	–	–	–	–	400	1,600
	04 Type	φ6.3×8	200	2,000	200	2,000	2,000	–	–
		φ8×8 to 10	200	2,000	200	2,000	1,000	–	–
		φ10×10 to 12.5	200	1,000	200	1,000	500	–	–
Chip Type		φ4	–	–	–	–	–	2,000	10,000
		φ5 to φ6.3×4.5 to 7.7,φ8×6.5	–	–	–	–	–	1,000	5,000
		φ8 to φ10×10 to 10.5	–	–	–	–	–	500	2,000
		φ12.5×13.5	–	–	–	–	–	200	1,000
		φ16×16.5,φ18×16.5	–	–	–	–	–	125	250
		φ16×21.5,φ18×21.5	–	–	–	–	–	75	150
04 Type		φ4 to φ5×5,φ4×7	200	2,000	200	5,000	2,000	–	–
		φ5×7	200	2,000	200	4,000	2,000	–	–
		φ6.3×5,φ6.3×7	200	2,000	200	2,000	2,000	–	–
		φ8×5 to 7	200	2,000	200	2,000	1,000	–	–
		φ5 to φ6.3×11,11.5	200	2,000	200	2,000	2,000	–	–
		φ8×11.5,12	200	2,000	200	2,000	1,000	–	–
		φ8×15	200	1,000	200	1,000	1,000	–	–
		φ8×20	200	1,000	200	1,000	1,000	–	–
		φ10×12.5	200	1,000	200	1,000	500	–	–
		φ10×16	200	1,000	200	1,000	500	–	–
		φ10×20	200	1,000	200	1,000	500	–	–
		φ10×25 to 30	200	1,000	100 (200)	500 (1000)	500	–	–
		φ12.5×15 to 20	100	1,000	100	1000 (500)	500	–	–
		φ12.5×25	100	500 (1000)	100	1000 (500)	500	–	–
		φ12.5×30	100	500	200 (100)	2000 (500)	500	–	–
		φ12.5×35	100	500	200 (100)	2000 (500)	500	–	–
		φ12.5×40	100	500 (100)	200 (100)	2000 (500)	–	–	–
		φ16×16 to 25	100	500	100	1000 (100)	–	–	–
		φ16×31.5 to 35.5	50	200 (400)	100	1000 (100)	–	–	–
		φ16×40	50 (100)	100	100	800 (100)	–	–	–
		φ18×16	50	100	100	1000 (100)	–	–	–
		φ18×20	50 (100)	100 (500)	100	1000 (100)	–	–	–
		φ18×25	50 (100)	100 (400)	100	1000 (100)	–	–	–
		φ18×31.5 to 35.5	50	100	100	1000 (100)	–	–	–
		φ18×40 to 50	50	250 (100)	100	800 (100)	–	–	–
		φ20×25 to 50	50	100	100	600 (100)	–	–	–
		φ22×40 to 50	50	100 (200)	100	400 (100)	–	–	–

LA*, LT*	φ22 to φ25	–	100
	φ30 to φ35	–	50
331Type or Others	φ36 to φ101	–	*

(Note) It may become the numerical value in ( ).

* Please inquire.

Electric Double Layer Capacitors

Series	Case size φD×L(mm)	Quantity (PCS.) Long lead (Q'ty/Bag)	Long lead MOQ/Box	Standard lead (Q'ty/Bag)	Standard lead MOQ/Box	Taping (f lat box) MOQ/Box	Taping (reel) MOQ/Reel	Taping (reel) (Q'ty/Box)
DX,DXJ,DXN,DXS(H or V Terminal)	φ11.5	–	–	200	2,000	–	–	–
DX,DXJ,DXN(V Terminal)	φ19	–	–	100	500	–	–	–
DH,DHL,DHC,DBJ DB,DBN,DBS	φ13.5	–	–	200	1,000	–	–	–
	φ21.5	–	–	100	500	–	–	–
DC,DCK	φ6.8	–	–	200	6,000	–	–	–
DS,DSK	φ4.8	–	–	–	–	–	2,000	10,000
	φ6.8	–	–	–	–	–	1,500 to 2,000*	6,000 to 8,000*
DVN,DVS	φ12.5×8.5	–	–	–	–	–	300	1,500
DVL	φ12.5×10.5	–	–	–	–	–	250	1,250

Series	Case size φD×L(mm)	Quantity (PCS.) Long lead (Q'ty/Bag)	Long lead MOQ/Box	Forming lead (Q'ty/Bag)	Forming lead MOQ/Box	Taping (f lat box) MOQ/Box	Taping (reel) MOQ/Reel	Taping (reel) (Q'ty/Box)
DU DUK DZ DZN DZH	φ6.3	200	2,000	200	2,000	2,000	–	–
	φ8×12	200	2,000	200	2,000	1,000	–	–
	φ8×15 to 22	200	1,000	200	1,000	1,000	–	–
	φ10×20 to 25	200	1,000	100	500	500	–	–
	φ10×30 to 35	200	1,000	100	500	500	–	–
	φ12.5×25	100	500	100	1,000	500	–	–
	φ12.5×35	100	500	200	2,000	–	–	–
	φ16×20 to 25	100	500	100	1,000	–	–	–
	φ16×31.5 to 35.5	50	200	100	1,000	–	–	–
	φ16×40	50	100	100	800	–	–	–
	φ18×35	50	100	100	1,000	–	–	–
	φ18×40	50	250	100	800	–	–	–
	φ25	–	50 or 100*	–	–	–	–	–
	φ35	–	50 or 100*	–	–	–	–	–

DZP	8.5×17×16	–	*
	8.5×17×24		
	10.5×21×29		
	10.5×21×39		

* Please inquire.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

ELNA®

Aluminum Electrolytic Capacitors

List of Contents

1. Type List for Aluminum Electrolytic Capacitors · 6
2. Systematized Classification of Aluminum Electrolytic Capacitors · 9
3. Product Symbol System for Aluminum Electrolytic Capacitors · · · · · · · · · · · 12
4. Recommended Land Pattern and Size, for Chip Type · · · · · · · · · · · · · · · · 13
5. Recommended Soldering Conditions · 14
6. Recommended Taping for Chip Type · 16
7. Lead Forming and Taping for Lead Type · 17
8. Cautions for Using Conductive Polymer Hybrid, Conductive Polymer Solid Electrolyte Aluminum Electrolytic Capacitors · · · · 24
9. Specifications for Conductive Polymer Hybrid Aluminum Electrolytic Capacitors by Series · 28
10. Specifications for Aluminum Electrolytic Capacitors With Conductive Polymer Solid Electrolyte by Series · · · · · · · · · · · · · · · · · 38
11. Cautions for Using Aluminum Electrolytic Capacitors · · · · · · · · · · · · · · · · 50
12. Specifications for Chip Type Aluminum Electrolytic Capacitors by Series · 55
13. Specifications for Miniature Aluminum Electrolytic Capacitors by Series · · · · · 99
14. Specifications for Large Aluminum Electrolytic Capacitors by Series · · · · · · · 155
15. Specifications for Aluminum Electrolytic Capacitors for Audio by series · · · · · 207
16. Technical Notes of Aluminum Electrolytic Capactiors · · · · · · · · · · · · · · · · 220
17. Technical Data of Aluminum Electrolytic Capactiors · · · · · · · · · · · · · · · · · 226

1

CAT.No.2019/2020E

■ Type List for Aluminum Electrolytic Capacitors

★ : New series
☆ : Upgrade

● Aluminum (Conductive Polymer, Hybrid) Electrolytic Capacitors

Category	Series	Page	Application	Category Temp. Range (℃)		Life time Range (hours)		Rated Voltage Range (V.DC)		Rated Capacitance Range (μF)		Size range φD x L (mm)		Outside color	JIS Configurati	Note
				Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.			
Hybrid	HV	28	Low ESR Hybrid Polymer Chip	−55	+105	10000		6.3	100	10	820	5×5.8	12.5×13.5	Silver	32	☆
	HT	28	Low ESR Hybrid Polymer Chip, Vibration resistance	−55	+105	10000		6.3	100	15	820	8×10	12.5×13.5	Silver	32	☆
	HVK	30	Low ESR, 125℃, Hybrid Polymer Chip	−55	+125	4000	6000	6.3	100	10	820	5×5.8	12.5×13.5	Silver	32	☆
	HTK	30	Low ESR, 125℃, Hybrid Polymer Chip, Vibration resistance	−55	+125	4000	6000	6.3	100	15	820	8×10	12.5×13.5	Silver	32	☆
	HVX	32	Low ESR, 135℃, Hybrid Polymer Chip	−55	+135	4000		16	50	68	470	8×10	10×10	Silver	32	☆
	HTX	32	Low ESR, 135℃, Hybrid Polymer Chip, Vibration resistance	−55	+135	4000		16	50	68	470	8×10	10×10	Silver	32	☆
	HR	34	Low ESR Hybrid Polymer, lead terminal type	−55	+105	10000		25	100	15	560	8×10	10×12.5	Silver	04	★
	HRK	36	Low ESR, 125℃, Hybrid Polymer, lead terminal type	−55	+125	4000	6000	25	100	15	560	8×10	10×12.5	Silver	04	★
Polymer	PVG	38	Ultra Low ESR Conductive Polymer Chip	−55	+105	2000		2.5	6.3	120	1200	5×5.7	10×7.7	Silver	32	
	PVX	40	Ultra Low ESR Conductive Polymer Chip	−55	+105	2000		2.5	10	100	1200	5×5.7	10×7.7	Silver	32	
	PVM	42	Super Low ESR Conductive Polymer Chip	−55	+105	2000		2.5	16	33	1200	5×5.7	10×7.7	Silver	32	
	PVK	44	Super Low ESR, High Temp. Conductive Polymer Chip	−55	+125	1000		2.5	16	33	1000	6.3×5.7	10×7.7	Silver	32	
	PRM	46	Super Low ESR Conductive Polymer, lead terminal type	−55	+105	2000		2.5	10	220	1500	6.3×8.0	10×12.5	Silver	04	

● Chip Type Aluminum Electrolytic Capacitors

Category	Series	Page	Application	Category Temp. Range (℃)		Life time Range (hours)		Rated Voltage Range (V.DC)		Rated Capacitance Range (μF)		Size range φD x L (mm)		Outside color	JIS Configurati	Note
				Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.			
Standard	RV4	58	4.5mm L	−40	+85	2000		6.3	50	1	100	4×4.5	6.3×4.5	Silver	32	
	RV5	56	High CV	−40	+85	2000		4	100	1	2200	4×5.3	12.5×13.5	Silver	32	
	RVB	59	Non Polarized	−40	+85	2000		6.3	50	1	47	4×5.3	6.3×5.3	Silver	32	
High Reliability	RVE	89	105℃ , 4.5mmL	−40	+105	1000		6.3	50	1	100	4×4.5	6.3×4.5	Silver	32	
	RVS	60	105℃ , 5.5mm L	−55	+105	1000		6.3	50	1	1500	4×5.3	10×10.5	Silver	32	
	RVL	62	105℃ , 5.5mm L	−55	+105	2000		6.3	50	1	100	4×5.7	6.3×5.7	Silver	32	
	RVJ	64	105℃, Higher Capacitance	−55	+105	2000	5000	6.3	100	10	1000	8×6.5	12.5×13.5	Silver	32	
	RVR	66	105℃, Long Life, High CV	−40	+105	2000		4	50	1	1500	4×5.3	10×10.5	Silver	32	
	RVI	90	105℃ , Non Polarized, 2000h	−40	+105	2000		6.3	50	1	47	4×5.8	6.3×5.8	Silver	32	
	RVC	68	105℃, 3000h/5000h	−40	+105	3000	5000	6.3	50	1	1000	4×5.8	10×10	Silver	32	
	RZH	70	105℃, 5000h/7000h	−55	+105	5000	7000	6.3	35	22	1000	6.3×5.8	10×10	Silver	32	★
Low Impedance, Low ESR, High Reliability	RVZ	72	105℃ , Low Impedance	−55	+105	1000	5000	6.3	35	4.7	2700	4×5.3	12.5×13.5	Silver	32	
	RVD	74	105℃ , Low Impedance, Long life	−55	+105	2000	5000	6.3	100	4.7	2200	4×5.8	12.5×13.5	Silver	32	
	RVV	76	105℃ , Low Impedance, High CV	−55	+105	2000		6.3	50	33	1500	6.3×5.8	10×10	Silver	32	☆
	RZD	78	105℃ , Low Impedance, High CV	−55	+105	2000		6.3	80	22	2200	6.3×5.8	10×10	Silver	32	☆
	RVT	80	125℃ , Low ESR	−40	+125	1000	5000	10	100	4.7	1000	4×5.8	12.5×13.5	Silver	32	
	RZJ	82	125℃ , Low ESR, Long Life	−40	+125	2000	3000	10	35	47	470	6.3×7.7	10×10	Silver	32	★
	RZF	84	125℃ , Low ESR, Long Life, High CV	−40	+125	2000	4000	10	80	22	680	6.3×5.8	10×10	Silver	32	☆
	RZE	86	125℃ , Low ESR, High CV	−40	+125	2000		35	35	47	100	6.3×7.7		Silver	32	☆
	RVX	88	135℃, Higher Reliability	−40	+135	1000		25	35	22	330	8×10	10×10	Silver	32	
For Vibration Resistance	RTZ	92	105℃, Low Z, High CV, 30G Vibration resistance	−55	+105	1000	5000	6.3	35	33	8200	6.3×5.8	18×21.5	Silver	32	☆
	RTD	94	105℃, Low Z, High CV, 30G Vibration resistance	−55	+105	2000	4000	6.3	100	10	8200	6.3×5.8	18×21.5	Silver	32	☆
	RTT	96	125℃, Low ESR, High CV, 30G Vibration resistance	−40	+125	1000	5000	10	100	10	4700	6.3×5.8	18×21.5	Silver	32	☆
	RTQ	98	150℃, Low ESR, High CV, 30G Vibration resistance	−40	+150	1000		10	35	33	470	8×10	10×10	Silver	32	

＊ Be sure to "Cautions for using Aluminum Electrolytic capacitors", before using these products.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ Type List for Aluminum Electrolytic Capacitors

★ : New series
☆ : Upgrade

● Miniature Aluminum Electrolytic Capacitors

Category	Series	Page	Application	Category Temp. Range (℃)		Life time Range (hours)		Rated Voltage Range (V.DC)		Rated Capacitance Range (μF)		Size range φD x L (mm)		Outside color	JIS Configurati	Note
				Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.			
Low profile	RC3	100	5mmL, Standard	−40	+85	1000		4	50	1	470	4×5	8×5	Blue	04	
	R3S	101	5mmL, 105℃	−55	+105	1000		6.3	50	1	100	4×5	6.3×5	Black	04	
	RB3	102	5mmL, Bipolar	−40	+85	1000		6.3	50	0.33	47	4×5	6.3×5	Blue	04	
	RC2	103	7mmL, Standard	−40	+85	1000		4	100	1	330	4×7	8×7	Blue	04	
	R2S	104	7mmL, 105℃	−55	+105	1000		6.3	50	1	100	4×7	6.3×7	Black	04	
	RB2	105	7mmL, Bipolar	−40	+85	1000		6.3	50	0.33	47	4×7	6.3×7	Blue	04	
Standard	RE3	106	Miniaturized Standard	−40	+85	2000		6.3	450	0.47	22000	5×11	18×40	Blue	04	
	R2B	108	Bipolarity Standard	−40	+85	2000		6.3	100	1	4700	5×11	18×35.5	Blue	04	
	RJP	109	105℃ , Bipolar	−40	+105	1000	2000	6.3	50	1	6800	5×11	18×35.5	Black	04	
	RJ5	112	105℃ , Miniaturized, High CV	−55	+105	1000		6.3	100	1	22000	5×11	18×40	Black	04	
				−40		1000	2000	160	450	1	470	6.3×11	18×40			
	RJ4	114	105℃ , Miniaturized	−55	+105	1000	2000	6.3	100	1	22000	5×11	18×40	Black	04	
				−40				160	450	1	330	6.3×11	18×35.5			
	RJ3	116	105℃ , Low Impedance	−55	+105	1000	2000	6.3	100	1	15000	5×11	18×35.5	Black	04	
				−40				160	400	1	220	6.3×11	18×40			
Special	RLB	110	Low-leakage Current	−40	+85	1000		6.3	50	1	2200	5×11	18×35.5	Blue	04	
Low Impedance, Low ESR, High Reliability	RJB	118	105℃ , Low Impedance, Miniaturized	−55	+105	2000	5000	6.3	100	3.3	10000	5×11.5	16×31.5	Black	04	
	RJH	120	105℃ , Extra Low Impedance	−55	+105	2000	5000	6.3	100	1	15000	5×11.5	18×40	Black	04	
	RJF	123	105℃ , Extra Low Impedance, Miniaturized	−40	+105	1000	10000	6.3	100	5.6	6800	4×7	16×25	Black	04	
	RJM	126	105℃ , Long life, Low Impedance	−40	+105	6000	10000	6.3	50	27	8200	5×11.5	16×25	Black	04	☆
	RJD	128	105℃, Low ESR, High Ripple, Miniaturized	−55	+105	2000	8000	6.3	100	10	18000	5×11.5	20×40	Black	04	
	RKD	140	125℃ , Low ESR, Miniaturized	−40	+125	2000	5000	10	100	100	8200	8×12	20×40	Black	04	
	RKB	142	135℃ , Low ESR, Miniaturized	−40	+135	2000	3000	10	100	220	6800	10×12.5	18×40	Silver	04	
	RKC	144	135℃ , Low ESR, Miniaturized	−40	+135	2000	3000	25	100	160	12000	12.5×20	18×40	Silver	04	
	RQA	146	150℃ , Miniaturized	−40	+150	1000		10	63	220	4700	10×14.5	18×42.5	Silver	04	
For Air bag	RJE	131	105℃ , Low ESR, High Ripple, For Airbag	−55	+105	5000		25	35	830	11000	12.5×15	18×40	Black	04	
	RJK	132	105℃ , High CV, Low ESR, High Ripple, For Airbag	−55	+105	5000		25	35	2500	17000	16×20	20×40	Black	04	☆
For Vibration Resistance	RPK	148	125℃ , Low ESR, 30G Vibration resistance	−40	+125	5000		10	100	220	8200	12.5×15	20×40	Black	04	
	RKE	150	125℃ , Low ESR, 40G Vibration resistance	−40	+125	5000		25	50	1200	8200	16×31.5	22×40	Silver	04	
	RKF	152	135℃ , Low ESR, 40G Vibration resistance	−40	+135	2000	3000	25	100	180	10000	12.5×25	22×40	Silver	04	
	RKG	154	150℃ , Low ESR, 40G Vibration resistance	−40	+150	1000	2000	25	80	800	4700	18×42	22×42	Silver	04	
High Ripple, long Life	RHS	134	105℃ , Long Life, High Ripple, For OBC	−40	+105	4000	5000	160	450	1	1000	10×12.5	22×50	Black	04	☆
	RHC	136	105℃ , Long Life, High Ripple, For OBC	−40	+105	5000	10000	160	450	2.2	1000	10×12.5	22×50	Black	04	☆
	RHD	138	105℃ , Long Life, High Ripple, For OBC	−40	+105	8000	12000	160	450	3.3	1000	10×12.5	22×50	Black	04	☆

＊ Be sure to "Cautions for using Aluminum Electrolytic capacitors", before using these products.

● Some of the series listed in the below table have been removed from the catalogue.
Please select from the new series for a designing your(new) application.

Category	Series	Application	Category Temp. Range (℃)		Life time Range (hours)		Rated Voltage Range (V.DC)		Rated Capacitance Range (μF)		Size range φD x L (mm)		Substitute series to recomend
			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
Polymer	PVH	Low ESR Conductive Polymer Chip	−55	+105	2000		2.5	35	10	1000	6.3×5.7	10×7.7	PVM
	PV3	Super Low ESR Conductive Polymer Chip, 4.0mmL	−55	+105	1000		2.5	6.3	150	220	5×4.0		—
	PV2	Super Low ESR Conductive Polymer Chip, 4.5mmL	−55	+105	2000		2.5	25	15	390	5×4.5	6.3×4.5	—
	PVS	Super Low ESR, High Voltage Conductive	−55	+105	2000		35	63	18	100	6.3×5.7	10×7.7	—
Chip	RV2	85℃, 5.5mm L, Standard	−40	+85	2000		4	50	0.1	220	3×5.3	6.3×5.3	RV5
	RV3	85℃, High CV	−40	+85	2000		6.3	50	4.7	330	4×5.3	6.3×7.7	RV5
	RV	85℃, Large Capacitance	−40	+85	2000		6.3	100	10	2200	8×6.5	12.5×13.5	RV5
	RVK	125℃, Standard	−40	+125	1000	5000	10	63	10	1000	8×10	12.5×13.5	RVT
	RTJ	105℃, Vibration resistance	−55	+105	2000		6.3	100	10	470	8×10	10×10.5	RTZ
	RTK	125℃, Vibration resistance	−40	+125	1000	1250	10	63	10	330	8×10	10×10.5	RTT
	RYK	125℃, Horizontal type	−40	+125	1000		6.3	63	56	820	9.5×19.0	9.5×24.0	—
Miniature	RJJ	105℃ , Low Impedance	−55	+105	2000	5000	6.3	100	0.47	15000	5×11.5	18×40	RJH
	RK	125℃, Standard	−40	+125	2000	5000	10	63	47	10000	8×12	18×40	RKD
	RJL	105℃, Long life, Low Impedance	−40	+105	4000	10000	6.3	100	6.8	6800	5×11.5	16×25	RJF, RJM

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ Type List for Aluminum Electrolytic Capacitors

★ : New series
☆ : Upgrade

● Large Capacitance Aluminum Electrolytic Capacitors

Category	Series	Page	Application	Category Temp. Range (℃)		Life time Range (hours)	Rated Voltage Range (V.DC)		Rated Capacitance Range (μF)		Size range φD x L (mm)		Outside color	JIS Configurati	Note
				Min.	Max.		Min.	Max.	Min.	Max.	Min.	Max.			
Snap-in	LA5	156	Miniaturized	−40	+85	2000	10	400	56	150000	22×20	35×50	Black	692	
				−25			—	450	47	820					
	LAH	166	105℃ , Standard	−40	+105	2000	16	100	390	82000	22×20	35×50	Black	692	
				−25			160	450	56	2200					
	LAT	172	105℃ , Miniaturized	−25	+105	2000	160	500	22	3900	22×20	35×60	Black	692	☆
	LAZ	178	High-Reliability, High Ripple, Long Life	−40	+105	3000	16	100	390	82000	22×20	35×50	Black	692	☆
				−25			160	500	39	3900		35×60			
	LAX	188	105℃, Ultra Long Life	−25	+105	5000	160	500	39	3900	22×20	35×60	Black	692	☆
	LJ6	194	105℃ , Higher Capacitance, Ultra Long Life	−25	+105	5000	200	500	390	3900	35×40	40×80	Black	—	☆
	LJ2	194	105℃ , Higher Capacitance, Ultra Long Life	−25	+105	5000	200	500	560	3900	40×45	40×80	Black	—	☆
Special	LPM	196	High ripple current	−25	+85	2000	250	400	45	220	35×40	35×50	Black	692	
	LM	196	High ripple current, Higher Capacitance	−25	+85	2000	250	400	90	440	35×80	40×100	Black	—	
Screw terminal	LYX	198	105℃ . Ultra Long Life	−40	+105	5000	350	450	1000	15000	51×75	90×236	Black	331	
	LYL	200	Ultra Long Life	−40	+85	20000	350	450	1000	15000	51×75	90×236	Black	331	
	LY6	202	High Ripple, Miniaturized	−25	+85	5000	400	600	1000	22000	51×115	101×237	Black	331	
	LY5	204	Standard	−40	+85	2000	10	250	1500	820000	36×53	90×171	Black	331	
				−25			350	630	470	18000	36×83	101×220			

● Aluminum Electrolytic Capacitors for Audio

Category	Series	Page	Application	Category Temp. Range (℃)		Life time Range (hours)	Rated Voltage Range (V.DC)		Rated Capacitance Range (μF)		Size range φD x L (mm)		Outside color	JIS Configurati	Note
				Min.	Max.		Min.	Max.	Min.	Max.	Min.	Max.			
For Audio	RVO	208	Chip Type (PURECAP)	−40	+85	2000	6.3	50	0.33	1000	4×5.3	10×10	Silver	32	
	RVF	209	Chip Type (SILMIC)	−40	+85	2000	10	50	1	100	4×5.3	8×10	Silver	32	
	RVM	210	Chip Type 105℃ , 2000h	−55	+105	2000	6.3	50	1	470	4×5.8	10×10.5	Silver	32	
	RVG	211	Chip Type	−40	+85	2000	6.3	35	3.3	470	4×5.3	10×10	Silver	32	
	RFS	212	High Grade (SILMIC Ⅱ)	−40	+85	1000	6.3	100	3.3	3300	5×11	18×40	Brown	04	
	ROS	213	High Grade (SILMIC)	−40	+85	1000	16	100	10	2200	6.3×11	18×40	Brown	04	
	ROB	214	Miniaturized Standard (TONEREX)	−40	+85	1000	6.3	100	1	10000	5×11	18×40	Black	04	
	RFO	215	Standard (PURECAP)	−40	+85	1000	6.3	100	1	15000	5×11	18×35.5	Black	04	
	RA3	216	Miniaturized Standard	−40	+85	2000	6.3	100	1	22000	5×11	18×35.5	Brown	04	
	RW5	217	105℃ , Miniaturized	−55	+105	1000	16	25	100	15000	5×11.5	18×40	Black	04	
	RBD	218	Miniaturized Bipolar	−40	+85	2000	6.3	100	1	4700	5×11	18×35.5	Black	04	
	LAO	219	For Audio, Higher Capacitance	−40	+85	1000	16	100	680	10000	22×20	35×50	Black	692	

＊ Be sure to "Cautions for using Aluminum Electrolytic capacitors", before using these products.

● Some of the series listed in the below table have been removed from the catalogue. Please select from the new series for a designing your(new) application.

Category	Series	Application	Category Temp. Range (℃)		Life time Range (hours)		Rated Voltage Range (V.DC)		Rated Capacitance Range (μF)		Size range φD x L (mm)		Substitute series to recomend
			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
For Audio	PVO	For Audio, Conductive Polymer Chip	−55	+105	2000		4	25	6.8	470	6.3×5.7	10×7.7	Please consult
	RVW	105℃, Chip Type (PURECAP)	−55	+105	1000		6.3	50	0.33	470	4×5.3	10×10	
	ROA	High Grade (Cerafine)	−40	+85	1000		6.3	100	0.47	6800	5×11	18×40	
	R2A	7mmL	−40	+85	1000		6.3	50	0.33	330	4×7	8×7	
	R3A	5mmL	−40	+85	1000		4	50	0.22	220	4×5	6.3×5	

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ Systematized Classification of Aluminum Electrolytic Capacitors

● Conductive Polymer Hybrid Aluminum Electrolytic Capacitors

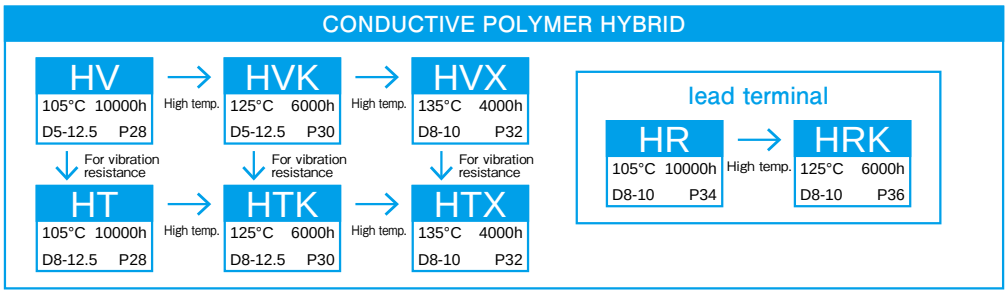

● Aluminum Electrolytic Capacitors with Conductive Polymer Solid Electrolyte

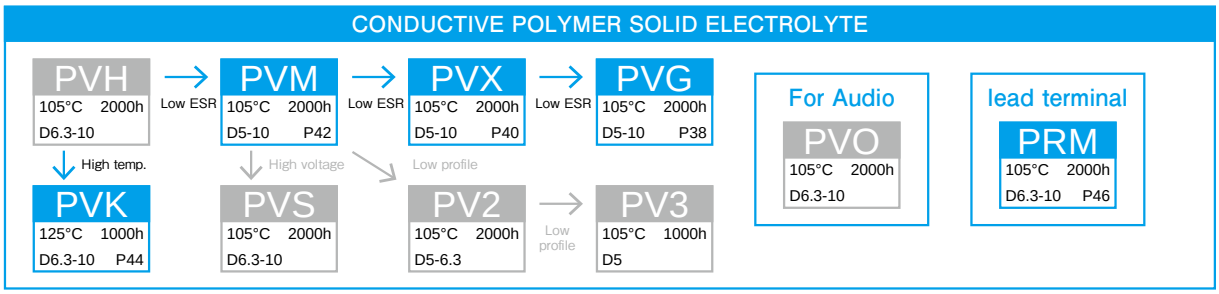

● Chip Type Aluminum Electrolytic Capacitors

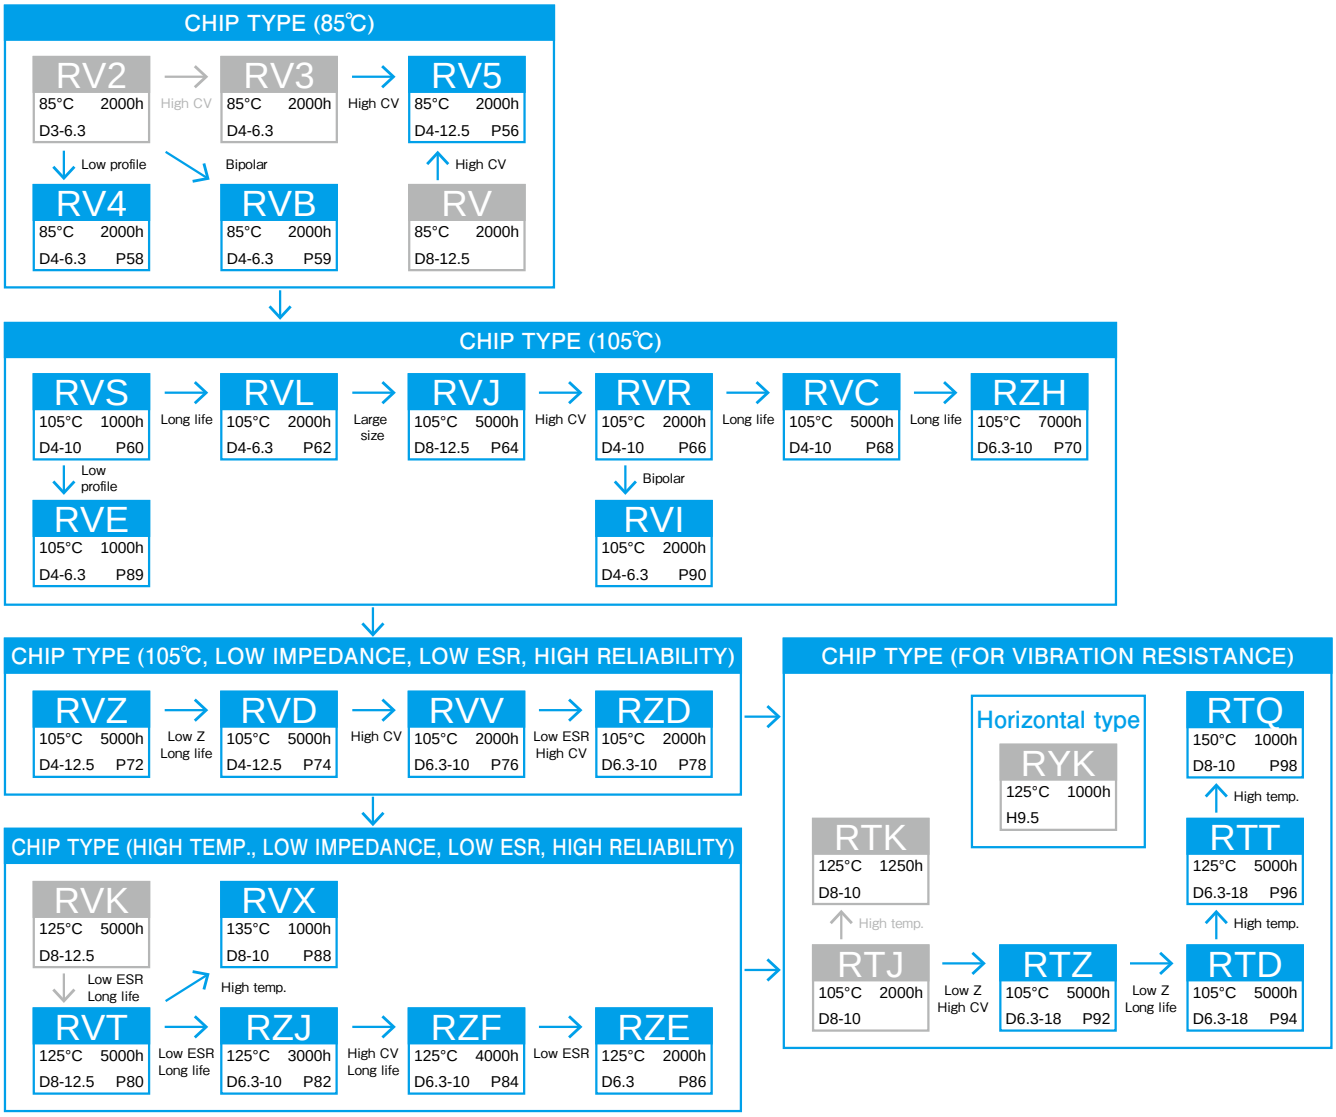

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ Systematized Classification of Aluminum Electrolytic Capacitors

● Miniature Aluminum Electrolytic Capacitors

ALUMINUM

MINIATURE ALUMINUM

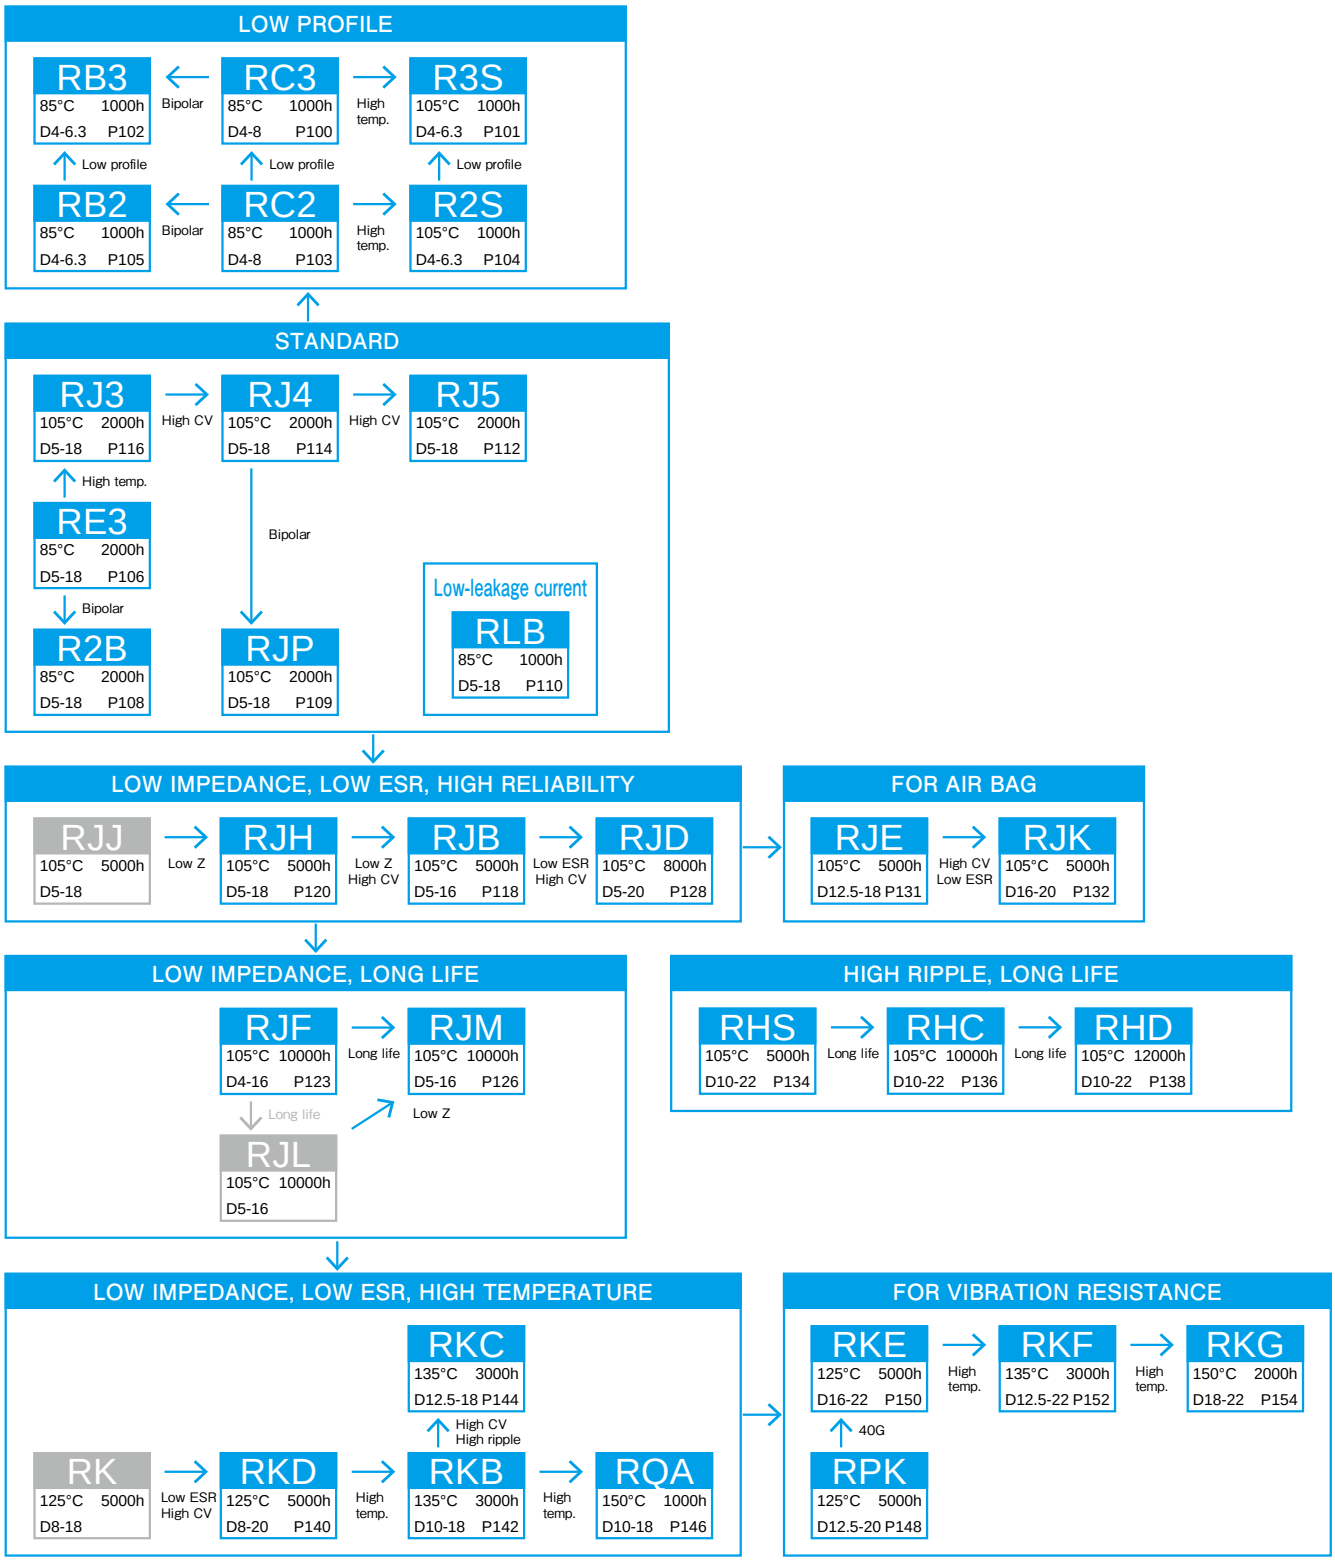

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ Systematized Classification of Aluminum Electrolytic Capacitors

● Large Capacitance Aluminum Electrolytic Capacitors

SNAP-IN TYPE

- LAH — 105°C 2000h — D22-35 P166
- → High CV → LAT — 105°C 2000h — D22-35 P172
- → Long life → LAZ — 105°C 3000h — D22-35 P178
- → Long life → LAX — 105°C 5000h — D22-35 P188
- → Large cap. → LJ6 — 105°C 5000h — D35-40 P194
- — LJ2 — 105°C 5000h — D40 P194
- ↑ High Temp. → LA5 — 85°C 2000h — D22-35 P156

SCREW TERMINAL TYPE

- LY5 — 85°C 2000h — D36-101 P204
- → Long life → LY6 — 85°C 5000h — D51-101 P202
- → Long life → LYL — 85°C 20000h — D51-90 P200
- ↑ High temp. → LYX — 105°C 5000h — D51-90 P198

HIGH RIPPLE CURRENT

- LPM — 85°C 2000h — D35 P196
- → Large cap. → LM — 85°C 2000h — D35-40 P196

● Aluminum Electrolytic Capacitors For Audio

CHIP TYPE

- RVW PURECAP — 105°C 1000h — D4-10
- → Long life → RVM — 105°C 2000h — D4-10 P210
- ↑ High temp. → RVO PURECAP — 85°C 2000h — D4-10 P208
- → High grade → RVG — 85°C 2000h — D4-10 P211
- → High grade → RVF SILMIC — 85°C 2000h — D4-8 P209
- ↑ High temp.

Polymer Type
- PVO — 105°C 2000h — D6.3-10

MINIATURE TYPE

- RFO PURECAP — 85°C 1000h — D5-18 P215
- → Low profile → R2A PURECAP — 85°C 1000h — D4-8
- → Low profile → R3A PURECAP — 85°C 1000h — D4-6.3
- ↑ High grade → RA3 — 85°C 2000h — D5-18 P216
- → High grade → ROB TONEREX — 85°C 1000h — D5-18 P214
- → High grade → ROA Cerafine — 85°C 1000h — D5-18
- → High grade → ROS SILMIC — 85°C 1000h — D6.3-18 P213
- → High grade → RFS SILMIC — 85°C 1000h — D5-18 P212
- ↓ High temp. → RW5 — 105°C 1000h — D5-18 P217

Bipolar
- RBD — 85°C 2000h — D5-18 P218

SNAP-IN TYPE

- LAO — 85°C 1000h — D22-35 P219

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ Product Symbol System for Aluminum Electrolytic Capacitors

□□□ – □□□ V □□□ M □□□ □□ – □□□

①Series code ②Rated voltage symbol ③Rated capacitance symbol ④ ⑤Casing symbol ⑥Optional symbol ⑦Taping, Lead-forming symbol

①Series code

Please refer to the page of each series.

②Rated voltage symbol

Write down the rated voltage itself ; however, write 2R5 for 2.5V, 6 for 6.3V.

③Rated capacitance symbol

The symbol denoting nominal capacitance shall consist of three numerals.
The first and second numerals shall represent the significant figures of nominal capacitance in the unit of microfarad (μF).
And the third numeral shall represent the number of zeros following the significant figures.
A decimal point is expressed with "R."

Example

Rated capacitance (μF)	Symbol
0.1	R10
1	010
2.2	2R2
33	330
100	101
2200	222
33000	333
470000	474

④Capacitance tolerance symbol

Example

Capacitance tolerance	Symbol
±10%	K
±20%	M
−10 to +30%	Q
−10 to +50%	T

⑤Casing symbol

Please refer to the page of each series.

⑥Optional symbol

Plating

Example

Symbol	Contents
#	Sn 100% plating +PET sleeve (lead terminal type)
U	Sn-Bi plating (chip type)
T	Sn 100% plating (chip type)

For Automotive

Example

Symbol	Contents
Q	Based on AEC-Q200
N	Based on AEC-Q200

⑦Taping, Lead-forming symbol

Write down one of the forming symbols given on page 16 to 19 for taping and lead-forming capacitors.
When taping or lead-forming is not necessary, leave the boxes blank.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ Recommended land pattern and size

(Vertical chip type)

● Standard type



(Unit : mm)

Case Size φD×L	Land Size			Thickness of Solder paste
	X	Y	W	
4×4.5, 5.3, 5.7, 5.8	1.6	2.6	1.0	0.15
5×4.5, 5.3, 5.7, 5.8	1.6	3.0	1.4	0.15
6.3×4.5, 5.3, 5.7, 5.8	1.6	3.6	1.9	0.15
6.3×7.7	1.6	3.6	1.9	0.15
8×6.5, 6.7, 7.7, 8.7	1.6	4.0	2.1	0.15
8×10, 10.5	2.5	∗3.5	∗3.0	0.15
10×7.7, 8.7, 10, 10.5, 12.5	2.5	∗4.0	∗4.0	0.15
12.5×13.5	3.2	6.0	4.0	0.15

∗For Vibration resistance use
φ8×6.5 Y=4.5 W=1.0
φ8×10, φ8×10.5 Y=4.0 W=2.5
φ10×10, φ10×10.5 Y=4.5 W=3.0
φ10×12.5 Y=4.5 W=3.0

● For vibration resistance type

RTZ, RTD, RTT, RTQ, RTV, RMH, RMD, RMJ, RMF, RME, HT, HTK, HTX series



(Unit : mm)

Case Size φD	Land Size			Thickness of Solder paste
	X	Y	W	
6.3	3.0	4.0	1.6	0.20
8	5.0	4.0	2.5	0.20
10	5.0	4.8	3.6	0.20
12.5	7.0	6.6	3.2	0.20
16	10.5	7.8	5.0	0.20
18	10.5	8.8	5.0	0.20

■ Recommended soldering conditions (Lead free)

● Aluminum (Conductive Polymer, Hybrid) electrolytic capacitors (Lead terminal type, Snap-in type)

(1) Soldering iron conditions
Iron tip temperature shall be 400°C±5°C within the duration of 3^{+1}_{0} seconds.

(2) Flow soldering conditions
The recommendation soldering conditions of the product in which flow soldering is possible are as graph.

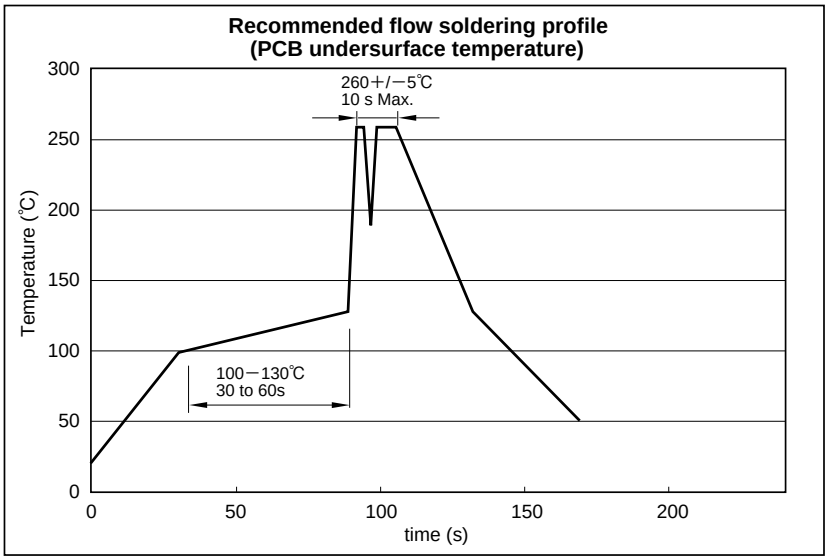

Caution for Using aluminum Electrolytic Capacitors

(1) Do not dip the capacitor into melted solder.

(2) Do not flux other part than the terminals.

(3) If there is a direct contact between the sleeve of the capacitor and the printed circuit pattern or a metal part of another component such as a lead wire, it may cause shrinkage of crack.

(4) If the application is for extended use, understand and manage the soldering characteristics to avoid abnormal current caused by a contact failure between the capacitor and the PCB.

(5) Please refer to cautions for using on page 24 to 26 or 50 to 53 and product specifications about other notes.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ Recommended soldering conditions (Lead free)

● Chip type aluminum (Conductive Polymer, Hybrid) electrolytic capacitors

(1) Soldering iron conditions
Iron tip temperature shall be 400°C±5°C within the duration of 3^{+1}_{0} seconds.

(2) Reflow soldering conditions

Profile

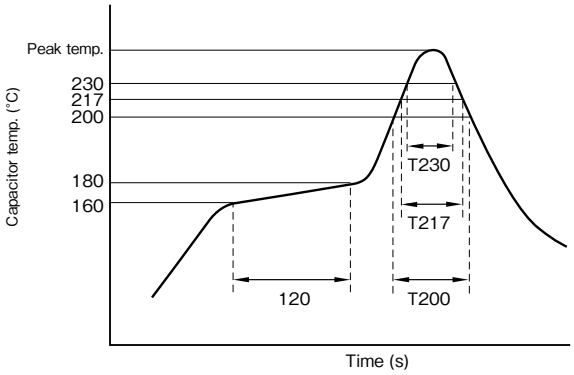

1. Preheating shall be under 180°C within 120 seconds.
2. Peak temperature shall be within the following table.
3. For conditions exceeding the tolerances, consult with us.

T200 : Duration while capacitor head temperature exceeds 200°C (s)
T217 : Duration while capacitor head temperature exceeds 217°C (s)
T230 : Duration while capacitor head temperature exceeds 230°C (s)
The measurement temperature point is the case top.

● Chip type aluminum Conductive Polymer, Hybrid electrolytic capacitors

Series	Size	Peak temp. (5sec or less)	T230	T217	T200	Reflow cycle
HV, HVK, HVX, HT, HTK, HTX, PVG, PVX, PVM, PVK,	φ5 to φ6.3	250℃ Max.	40 sec. max.	50 sec. max.	60 sec. max.	2 times or less
	φ8 to φ10	240℃ Max.	40 sec. max.	50 sec. max.	60 sec. max.	2 times or less

● Chip type aluminum electrolytic capacitors

Series	Size	Peak temp. (5sec or less)	T230	T217	T200	Reflow cycle
RV2, RV3, RV5, RV, RVB, RVS, RVL, RVR, RVC, RZH, RVZ, RVD, RVV, RZD, RVT, RZJ, RZF, RZE, RVX, RVE, RVI, RVO, RVF, RVM, RVG	φ4 to φ6.3	250℃ Max.	40 sec. max.	50 sec. max.	60 sec. max.	2 times or less
	φ8 to φ10	240℃ Max.	40 sec. max.	50 sec. max.	60 sec. max.	2 times or less
	φ12.5	240℃ Max.	20 sec. max.	30 sec. max.	50 sec. max.	2 times or less
RV4	φ4 to φ5	250℃ Max.	40 sec. max.	50 sec. max.	60 sec. max.	2 times or less
	φ6.3	240℃ Max.	40 sec. max.	50 sec. max.	60 sec. max.	2 times or less
RVJ	φ8 to φ10	240℃ Max.	40 sec. max.	50 sec. max.	60 sec. max.	2 times or less
	φ12.5	230℃ Max.	—	20 sec. max.	30 sec. max.	2 times or less
RZA, RZB, RZC	φ4 to φ6.3	260℃ Max.	40 sec. max.	90 sec. max.	—	2 times or less
	φ8 to φ10	250℃ Max.	40 sec. max.	90 sec. max.	—	2 times or less
RTZ, RTD, RTT, RTQ, RTV, RMH, RMD, RMJ, RMF, RME	φ6.3	250℃ Max.	40 sec. max.	60 sec. max.	80 sec. max.	2 times or less
	φ8 to φ10	250℃ Max.	30 sec. max.	60 sec. max.	80 sec. max.	2 times or less
	φ12.5 to φ18	240℃ Max.	20 sec. max.	30 sec. max.	50 sec. max.	2 times or less

*Please ensure that the capacitor became cold enough to the room temperature (5 to 35℃) before the second reflow.

■ Taping

■ Carrier tape dimension (taping polarity R)

● ϕ4 to ϕ10

(Unit : mm)

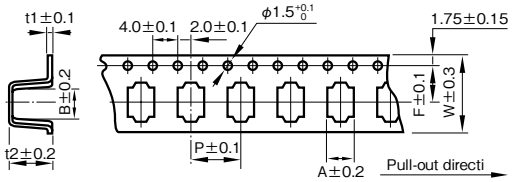

● ϕ12.5 to 18

(Unit : mm)

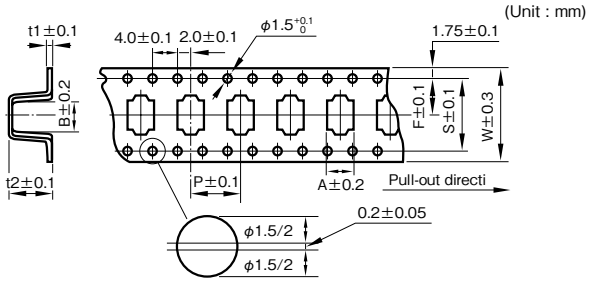

■ Taping polarity

(The all series except bypolar type)





(Unit : mm)

	Outside size φD×L	W	A	B	P	t2	F	t1	S
	4×4.5	12	4.7	4.7	8.0	4.8	5.5	0.4	—
	4×5.3	12	4.7	4.7	8.0	5.8	5.5	0.4	—
	4×5.7, 5.8	12	4.7	4.7	8.0	6.2	5.5	0.4	—
	5×4.5	12	5.7	5.7	12	4.8	5.5	0.4	—
	5×5.3	12	5.7	5.7	12	5.8	5.5	0.4	—
	5×5.7, 5.8	12	5.7	5.7	12	6.2	5.5	0.4	—
	6.3×4.5	16	7.0	7.0	12	4.8	7.5	0.4	—
	6.3×5.3	16	7.0	7.0	12	5.8	7.5	0.4	—
	6.3×5.7, 5.8	16	7.0	7.0	12	6.2	7.5	0.4	—
	6.3×7.7	16	7.0	7.0	12	8.3	7.5	0.4	—
	8×6.5	16	8.7	8.7	12	6.8	7.5	0.4	—
	8×6.7	24	8.7	8.7	12	7.2	11.5	0.4	—
	8×7.7	24	8.7	8.7	12	8.2	11.5	0.4	—
	8×8.7	24	8.7	8.7	16	9.5	11.5	0.4	—
	8×10	24	8.7	8.7	16	11	11.5	0.4	—
	8×10.5	24	8.7	8.7	16	11.5	11.5	0.4	—
	10×7.7	24	10.7	10.7	16	8.2	11.5	0.4	—
	10×8.7	24	10.7	10.7	16	9.5	11.5	0.4	—
	10×10	24	10.7	10.7	16	11	11.5	0.4	—
	10×10.5	24	10.7	10.7	16	11.5	11.5	0.4	—
	10×12.5	24	10.7	10.7	16	13.0	11.5	0.4	—
*	12.5×13.5	32	13.4	13.4	24	14.5	14.2	0.5	28.4
*	16×16.5	44	17	17	28	17.5	20.2	0.5	40.4
*	16×21.5	44	17	17	28	22.5	20.2	0.5	40.4
*	18×16.5	44	19	19	32	17.5	20.2	0.5	40.4
*	18×21.5	44	19	19	32	22.5	20.2	0.5	40.4

■ Reel dimension

(Unit : mm)



(Unit : mm)

	Outside size φD×L	Reel dimension W	Reel dimension t
	4	14	3
	5	14	3
	6.3	18	3
	8×6.5	18	3
	8×6.7	26	3
	8, 10	26	3
*	12.5	34	3
*	16	46	3
*	18	46	3

■ Packing quantity (Reel)

	Outside size φD×L	Quatity (PCS.)
	4	2000
	5, 6.3	1000
	8×6.5, 6.7	1000
	8×7.7 to 10.5	500
	10×7.7 to 10.5	500
	10×12.5	400
*	12.5×13.5	200
*	16×16.5	125
*	16×21.5	75
*	18×16.5	125
*	18×21.5	75

■ Reel material

Card board : symbol R
Polystyrene: symbol R2 (ϕ10 or less)
R5 (ϕ12.5 or more)

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ Lead Forming

• In order to facilitate insertion into printed circuit board, lead wires are cut or formed.

Product Size Table

Unit: mm

Forming name	Lead forming symbol	Dimension F (Lead pitch)	Dimension φD (Case diameter)	Style	Outline drawing
Forming cut	F10	2.0	4	B	Processed style A / Processed style B
	F1		5	A	
	F12	2.5	4 to 5	B	
	F1		6.3	A	
	F1	3.5	8	A	
	F4		4 to 8	B	
	F	5.0	4 to 8	B	
	F		10 to 12.5	A	
	F	7.5	16 to 18	A	
Snap-in	S1	5.0	4 to 8	B	Processed style A / Processed style B
	S1		10 to 12.5	A	
	S1	7.5	16 to 18	A	
Forming cut (restrict series)	F49	5.0	10 to 12.5		F49 / F51 / F58
	F51		10 to 12.5		
	F58		10		
	F49	7.5	16 to 18		
	F51		16 to 18		

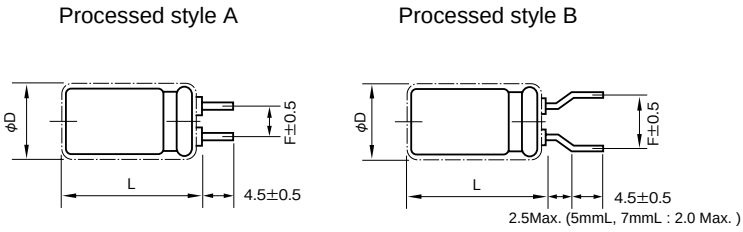

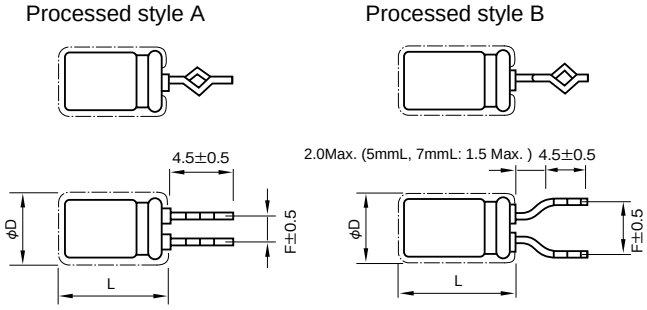

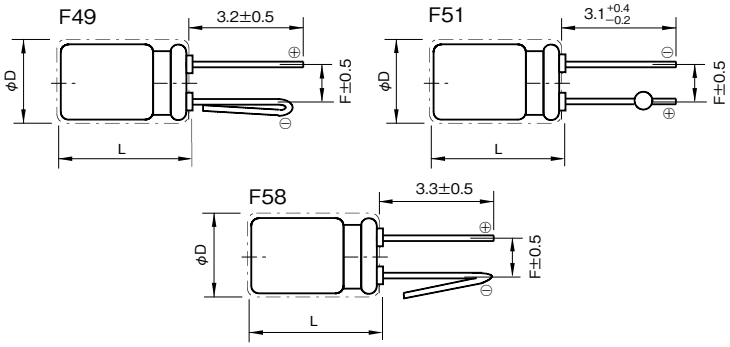

Forming name	Lead forming symbol	Dimension F (Lead pitch)	Dimension φD (Case diameter)	Dimension ℓ0	Dimension ℓ1	Outline drawing
For 90° side mount of case	G9, G10	3.5	8	5.5	1.0	
	G59, G60		8	3.6	1.0	
	G9, G10	5.0	10 to 12.5	5.5	1.0	
	G55, G56		12.5	7.5	2.5	
	G59, G60		10 to 12.5	3.6	1.0	
	G95, G96		12.5	0.95	4.9	
	G99, GA0		10	1.0	1.9	
	GAS, GAT		10 to 12.5	4.5	1.0	
	G9, G10	7.5	16 to 18	5.5	1.0	
	GAS, GAT		16 to 18	4.5	1.0	

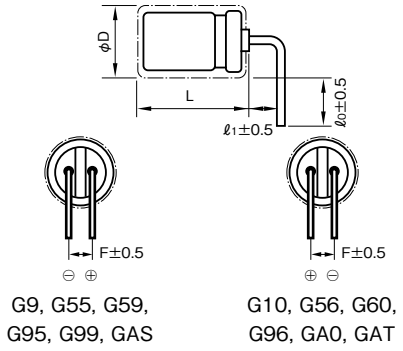

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications
from ELNA to ensure that the component is suitable for your use.

■Taping

• For automatic insertion (radial lead type)

Processed style A

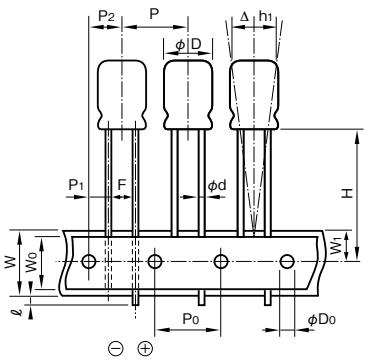

Processed style B

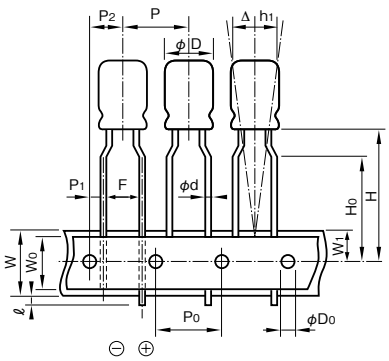

*The shape of a lead wire sandwiched by the mounting strips may differ from the ones shown in the figures.

Product Size Table

Unit: mm

Item	Symbol	Tolerance	5L to 8L		
			φ4 to φ8(except φ8×7L)		φ4 to φ8
Lead forming symbol	—	—	T36	T58	T2
Style	—	—	A or B		B
Lead-wire diameter	φd	±0.05	0.4 or 0.45		
Lead to lead distance	F	+0.8 −0.2	2.5		5.0
Height of component from tape center	H	+0.75 −0.5	18.5	17.5	
Lead-wire clinch height	H_0	±0.5	—	16.0 (φ4)	16.0
Pitch of component	P	±1.0	12.7		
Feed hole pitch	P_0	±0.3	12.7		
Hole center to lead	P_1	±0.5	5.1		3.85
Hole center to component	P_2	±1.0	6.35		
Tape width	W	±0.5	18.0		
Hold down tape width	W_0	Min.	6.0		
Feed hole position	W_1	±0.5	9.0		
Max. lead protrusion	ℓ	Max.	1.0		
Feed hole diameter	$φD_0$	±0.2	4.0		
Alignment of component to center	Δh	±1.0	0		
Alignment of component to center	$Δh_1$	±1.0	0		
Total tape thickness	t	±0.2	0.7		

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■Taping

• For automatic insertion (radial lead type)

Product Size Table

Unit: mm

Item	Symbol	Tolerance	11L to 25L					
			φ5, φ6.3			φ8	φ10	φ12.5
Lead forming symbol	—	—	T36	T58	T2	T2	T2	T4
Style	—	—	A or B		B		A	
Lead-wire diameter	φd	±0.05	0.5 or 0.6			0.6		
Lead to lead distance	F	+0.8 −0.2	2.5		5.0			
Height of component from tape center	H	+0.75 −0.5	18.5	17.5	18.5	20.0	18.5	
Lead-wire clinch height	H_0	±0.5	—		16.0		—	
Pitch of component	P	±1.0	12.7					15.0
Feed hole pitch	P_0	±0.3	12.7					15.0
Hole center to lead	P_1	+0.5 (10 to φ18 ±0.7)	5.1		3.85			5.0
Hole center to component	P_2	±1.0	6.35					7.5
Tape width	W	±0.5	18.0					
Hold down tape width	W_0	Min.	6.0					
Feed hole position	W_1	±0.5	9.0					
Max. lead protrusion	ℓ	Max.	1.0					
Feed hole diameter	$φD_0$	±0.2	4.0					
Alignment of component to center	Δh	±1.0	0					
Alignment of component to center	$Δh_1$	±1.0	0					
Total tape thickness	t	±0.2	0.7					

Part numbering system (example: Series RJB, 10V470μF, 5mm pitch taping)

RJB	—	10	V	471	M	G3	#	—	T2
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

■ Standard packing specification of aluminum (Conductive Polymer, Hybrid) electrolytic capacitors (taping article)

Classification	Chip type	
	Conductive Polymer Hybrid Aluminum Electrolytic Capacitors, Aluminum electrolytic capacitors	Aluminium electrolytic capacitors with conductive polymer solid electrolyte
Packing style	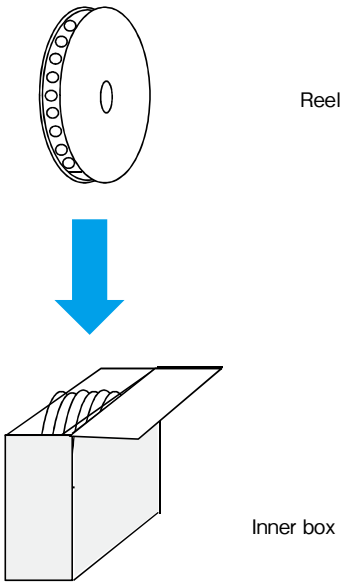	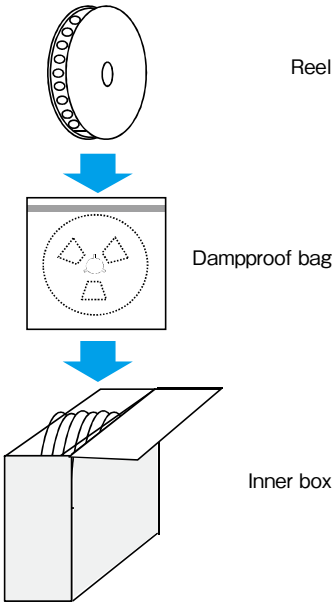

Classification	Lead terminal type	
Packing style	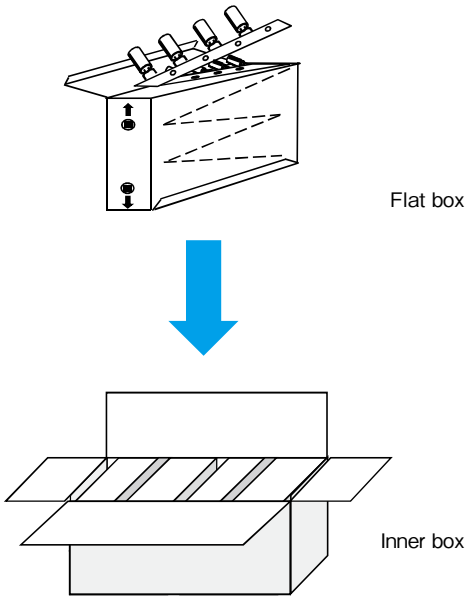	Packing size and quantity

Packing size and quantity

Case size	Size (mm)			Quantity (pcs)
	W	L	H	
φ4×5, φ4×7	210	340	55	2,000
φ5×5, φ5×7	270	340	55	2,000
φ6.3×5, φ6.3×7	300	340	55	2,000
φ8×5, φ8×7	270	340	55	1,000
φ5×11, φ5×11.5	265	340	55	2,000
φ6.3×11, φ6.3×11.5	300	340	60	2,000
φ8×11.5, φ8×12	265	340	55	1,000
φ8×15, φ8×20	255	345	65	1,000
φ10×12.5, φ10×16	215	340	60	500
φ10×20	210	340	65	500
φ12.5×15	290	340	65	500
φ12.5×20	290	340	65	500
φ12.5×25	290	340	70	500



Please inquire for details.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ Standard packing specification of aluminum electrolytic capacitors (long lead, lead forming)

Classification	Long lead, Lead forming of φ10 or less (Standard packing)	Lead forming of φ12.5 or more (Standard packing)
Packing style	 Plastic bag  Inner box	 Small box 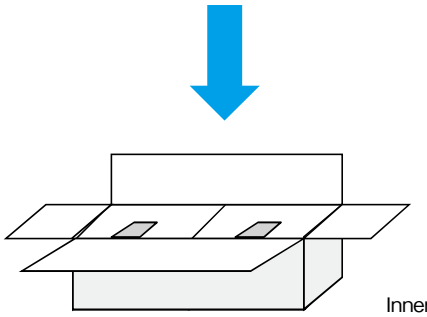 Inner box

Classification	φ10 to φ22 (Optional packing)	φ22 or more (Standard packing)
Packing style	Tray 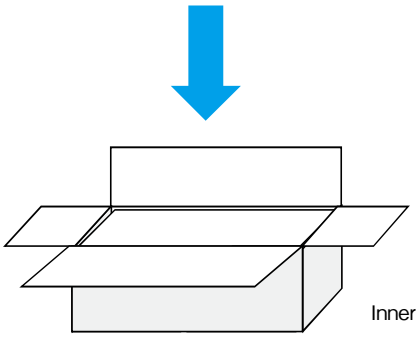 Inner box	 Inner box 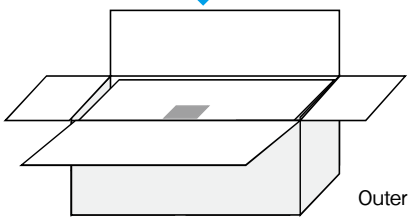 Outer box

Please inquire for details.

Aluminum Electrolytic Capacitors

Conductive Polymer Hybrid Aluminum Electrolytic Capacitors

Aluminum Electrolytic Capacitors With Conductive Polymer Solid Electrolyte

Chip Type Aluminum Electrolytic Capacitors

Miniature Aluminum Electrolytic Capacitors

Large Capacitance Aluminum Electrolytic Capacitors

Aluminum Electrolytic Capacitors for Audio

■ Cautions for Using Conductive Polymer Hybrid Aluminum Electrolytic Capacitors, Aluminum Electrolytic Capacitors With Conductive Polymer Solid Electrolyte

Please be sure to read this specification before using this product.
Before placing an order, please inquire about the Specification to check details.

■Cautions for Usage

1. Conductive Polymer Hybrid Aluminum Electrolytic Capacitors, Solid Conductive Polymer Aluminum Electrolytic Capacitors are polarized.

- Using a capacitor with reversed polarity causes abnormal current flow, resulting in a short circuit.
- Cannot use for the circuit to which the polarity reverses by ripple voltage.

2. Prohibited Circuits

- Since leakage current problem may arise, capacitors cannot be used in the following circuits.
  ①Coupling circuits
  ②Circuits greatly affected by leakage current

3. Use capacitors within the rated voltage.

- The application of voltages exceeding the rated voltage can significantly increase leakage current, resulting in a short failure. Please do not apply a voltage exceeding the rated voltage.

4. Be careful of excessive rush current.

- Using capacitors in the circuit where excessive rush current passes may cause characteristic deterioration or a short. When the rush current exceeds 10 A, we recommend use of protection circuits to ensure high reliability.

5. Use the allowable ripple voltage and the rated ripple current below the specified values.

- When superimposing a ripple voltage on a DC bias voltage, exercise care that the peak voltage value does not exceed the rated voltage and does not reverse the polarity.
- The rated ripple current shall be below the specified value.

6. Changes in characteristics due to operating temperature

- The characteristics of conductive polymer hybrid aluminum electrolytic capacitors, solid conductive polymer aluminum electrolytic capacitors vary by temperature as follows. These variations are temporary and recover when the temperature goes back (except for the case of characteristic deterioration because of high temperatures over a long time). Note that using capacitors over the upper category temperature increases leakage current, resulting in a short and destruction.
  Be careful of the capacitor temperature considering not only the ambient temperature where the equipment is placed and the temperature inside the equipment but also radiation heat from the heating element inside the equipment, and self-heat generation by ripple current.
  ①Capacitance expressed in the value at 20°C, 120 Hz increases with increased temperature and decreases with decreasing temperature.
  ②Tangent of loss angle (tanδ) expressed in the value at 20°C, 120 Hz is temperature-independent.
  ③Equivalent series resistance (ESR) expressed in the value at 20°C, 100 kHz is temperature independent.
  ④Leakage current increases with increased temperature and decreases with decreasing temperature.

7. Changes in characteristics due to frequency

- The characteristics of conductive polymer hybrid aluminum electrolytic capacitors, solid conductive polymer aluminum electrolytic capacitors vary by operating frequency as follows.
  ①Capacitance expressed in the value at 20°C, 120 Hz decreases with increased frequency.
  ②Tangent of loss angle (tanδ) expressed in the value at 20°C, 120 Hz increases with increased frequency.
  ③Equivalent series resistance (ESR) expressed in the value at 20°C, 100 kHz increases with decreasing frequency.

8. Failure modes of solid conductive polymer aluminum electrolytic capacitors

- The failure modes of solid conductive polymer aluminum electrolytic capacitors are a wear-out failure by deterioration of electrical performance and a random failure by a short. The failure rate level is 0.5%/1,000h at the reliability level of 60% with the specified voltage applied at 105°C.
- If a short occurs and continues with the application of a voltage exceeding the rated voltage, increasing the internal temperature, the internal pressure increases by vaporization of the cathode material, which may cause the aluminum case to come off.

9. Operating environments

- Do not use capacitors in an environment directly exposed to water, saltwater spray, oil spill or condensation.
- Do not use capacitors in an environment filled with toxic gas such as hydrogen sulfide, sulfurous acid, nitrous acid, chlorine, ammonia, etc.
- Do not use capacitors in a place exposed to ozone, ultraviolet rays, or radiation.

10 . Fumigation Process

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

- Before transportation of electronic equipment to overseas, fumigation process may be subjected to wooden packing material with a halogen (compound) gas such as methyl bromide. Exercise care that this halogen gas may corrode capacitors. Also, be careful of epidemic preventive agent as corrosive component such as halogen may be contained.

11. The case of Conductive Polymer Hybrid Aluminum Electrolytic Capacitors, Solid Conductive Polymer Aluminum Electrolytic Capacitors and the cathode terminal are not insulated.

- The case and the cathode terminal are not insulated as being connected through inconstant resistance.

12. Double-sided PCB's

- When using capacitors on a double-sided PCB, exercise care that the wiring pattern does not touch the area where the capacitors are mounted. Failure to do so may cause a short to occur to the PCB depending on the mounting conditions.

13. Regarding Connection of Conductive Polymer Hybrid Aluminum Electrolytic Capacitors, Solid Conductive Polymer Aluminum Electrolytic Capacitors

- When connecting more than one capacitor in parallel, consider the current balance.

14. Use at a high altitude

- The use of capacitors at high altitudes such as on an airplane causes a large difference between the internal pressure of the capacitors and the atmospheric pressure. However, there is no problem in use under atmospheric pressure up to about an altitude of 10,000 meters.
  If the condition is severe like space, please contact us.

15. Other Notes

- Do not use capacitors on a circuit where rapid charge and discharge are repeated.
- Electrical characteristics of capacitors vary by variations in temperature and frequency. Please consider these variations when designing a circuit.

■Cautions for Mounting

1. Cautions for Mounting

- Do not reuse capacitors that have been assembled in a set and energized. Capacitors cannot be reused except for those which have been measured on electrical performance during periodic inspection.
- Before mounting, confirm the capacitor ratings (rated capacitance and rated voltage).
- Capacitors may generate transient recovery voltage. In this case, discharge through a resistor of about 1 kΩ.
- Before mounting, confirm the polarity of capacitor.
- Do not drop capacitors onto a floor nor use them.
- Do not mount deformed capacitors.
- Do not mount heating parts around capacitors and on the back of the PCB under or back of capacitors).

2. Do not apply excessive pressure to the capaci-tor or its terminals

- Be careful of the shock force that can be produced by absorbers, product checkers, and centering on automatic inserters and installers.

3. Soldering

- Do not solder capacitor body by dipping into melted solder.
- Soldering conditions (preheating, soldering temperature, terminal dipping time) should be within the ranges specified in the catalog or the delivery specification.
  Please refer to page 15.
- Flux should not adhere to the parts other than the terminals.
- When using a soldering iron, avoid excessive stress to capacitor body.
- Although leakage current may increase (from a few µA to hundreds of µA) after soldering, it can be reduced through self-repair by applying voltage. It is advised to operate the set properly after treating with the recommended voltage.
- In case of a long-term use of equipment, control the soldering characteristics so that capacitors and PCB do not fail to connect to avoid abnormal current passage by a failure of soldering to mount.

4. Handling after Soldering

- Do not tilt, fall, raise or twist capacitor body.
- Do not pick up or move PCB by holding a capacitor.
- Do not bump capacitors against objects. When stacking PCB's, make sure that capacitors do not touch the PCB's or other components.
- Do not subject capacitors to excessive stress.

5. Cleaning after Soldering

- Recommended cleaning method
  ①Cleaning solutions:
  (a) CLEANTHROUGH 710M, 750H, 750L
  (b) PINEALPHA ST-100S
  (c) Techno Care FRW-4~17
  (d) Isopropyl alcohol (2-propanol)
  ②Cleaning conditions:
  (a) The temperature of cleaning solution shall be less than 60°C.
  (b) Use immersion or ultrasonic waves within two minutes.

(c) After cleaning, capacitors and PCB's shall thoroughly be rinsed and dried with hot blast for more than 10 minutes. The temperature of such breeze should be less than the upper category temperature.

(d) After cleaning, do not keep capacitors in cleaning solution atmosphere or airtight containers.

- During cleaning, control the cleaning solution against contamination.

6. Fixing adhesives and coating materials.

- Do not use halogenated fixatives and coatings.
- Before using a fixative or coating, remove flux residues and contaminants from between the PCB and the sealing section of capacitors.
- Dry the cleaning solution before using the adhesive or coating.
- Do not cover up all the sealing sections (terminal side) of capacitors with the adhesive or coating.
- Heat curing conditions of fixative and coating.

■Other Cautions

1. Do not directly touch the terminals of Conductive Polymer Hybrid Aluminum Electrolytic Capacitors, Solid Conductive Polymer Aluminum Electrolytic Capacitors.

Failure to do so can cause electric shock or burns. Before use, allow capacitors to discharge through a 1kΩ resistor (with a sufficient margin to the heat generation capacity) as needed.

2. Do not short-circuit between the terminals of the Conductive Polymer Hybrid Aluminum Electrolytic Capacitors, Solid Conductive Polymer Aluminum Electrolytic Capacitors. Do not subject capacitors to conductive solutions such as acid and alkaline water solutions.

3. Periodic inspection should be performed on the capacitors for the industrial equipment application.

Check the following checkpoints.

- Visual inspection to check for significant defects.
- Electrical performance: leakage current, rated capacitance, tangent of loss angle, ESR, and items specified in the catalog or the specification.

4. Be careful of the following cases of emergency.

- In case of a short during use of capacitors in sets, producing gas, turn off the main power of the set or unplug the power cord from the outlet.
- In case of a short, producing gas, it may take a few seconds to a few minutes depending on the conditions. Therefore, ensure that the protective circuit of the power supply works during this time.
- If the gas gets in your eyes, rinse them immediately. Gargle if the gas is inhaled.
- Do not lick the electrolyte of capacitors. When the electrolyte gets on your skin, wash it off with soap immediately.

5. Storage Conditions.

- Do not store at high temperature and high humidity. Store at a temperature of 5 to 35°C and a relative humidity of less than 75%, keeping free from direct sunlight.
- Solid conductive polymer aluminum electrolytic capacitors are during delivery, stored in airtight moistureproof bags to ensure satisfactory soldering. Once the bag is opened right before mounting, it is better to use up the capacitors.
  If some are unavoid-ably left over, return them to the moistureproof bag, and seal the opening hermetically.
- Solid conductive polymer aluminum electrolytic capacitors may have increased leakage current when unused or stored for a long time after mounted on equipment. This phenomenon often occurs at high ambient temperatures; however, leakage current will decrease through voltage treatment. If leakage current still increases after a lapse of more than one year at ambient temperature (shorter time at high temperatures), treat with voltage as needed. In design of equipment, consider the effect of increase in initial current, and install protective circuits as needed.

Please check that recommended voltage treatment conditions are provided for each series.

- Do not store capacitors in an environment directly exposed to water, saltwater spray, oil spill or condensation.
- Do not store capacitors in an environment filled with toxic gas such as hydrogen sulfide, sulfurous acid, nitrous acid, chlorine, ammonia, etc.
- Do not store capacitors in a place exposed to ozone, ultraviolet rays, or radiation.

6. Please take the following actions when disposing of Conductive Polymer Hybrid Aluminum Electrolytic Capacitors, Solid Conductive Polymer Aluminum Electrolytic Capacitors.

- Entrust to specialists of industrial waste treatment for incineration.

7. Others

- Before using capacitors, check the details of the specification and catalog as well as the following.

Technical Report of Japan Electronics and Information Technology Industries Association
EIAJ RCR-2367B
Guideline of notabilia for fixed aluminum electrolytic capacitors for use in electronic equipment

HV,HT

CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Conductive Polymer Hybrid Capacitors

GREEN CAP | SMD | Low ESR | 105℃ 10000hours

- Low ESR and high ripple current are realized.
- HT is resist to vibration. (30G guaranteed)
- Equivalent to conductive polymer type Aluminum Electrolytic Capacitor. (There are little characteristics change by temperature and frequency)
- Guaranteed 105℃, 10000 hours.

Vibration resistance

HT ⇦ HV

Marking color : Blue print

Specifications

Item	Performance
Category temperature range (℃)	−55～+105
Tolerance at rated capacitance (%)	±20 (20℃, 120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 6.3, 10, 16, 25, 35, 50, 63, 80, 100 tanδ (max.): 0.20, 0.18, 0.16, 0.14, 0.12, 0.10, 0.08, 0.08, 0.08 (20℃, 120Hz)
Characteristics at high and low temperature	Impedance ratio (max.): Z−25℃/Z+20℃ 1.5; Z−55℃/Z+20℃ 2.0 (100kHz)
Endurance (105℃) (Applied ripple current)	Test time: 10000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 200% or less of the initial specified value ESR change: 200% or less of the initial specified value
Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1.

Outline Drawing

Unit : mm

Series HV

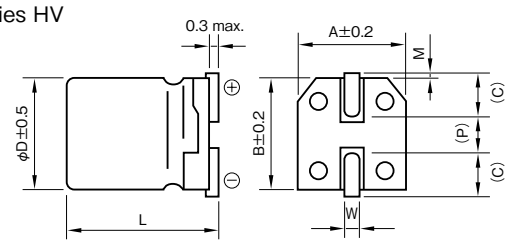

( ) : Reference size

φD	L	A	B	C	M	W	P	Casing symbol
5	5.8±0.3	5.3	5.3	2.3	0.4±0.2	0.5 to 0.8	1.5	E61
6.3	5.8±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	F61
6.3	7.7±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	F80
8	8.7±0.3	8.4	8.4	3.0	0.4±0.2	0.5 to 0.8	3.1	G90
8	10±0.5	8.4	8.4	3.0	0.4±0.2	0.7 to 1.1	3.1	G10
10	8.7±0.3	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	H90
10	10±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	H10
10	12.5±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	HC5
12.5	13.5±0.5	13.0	13.0	4.9	0.7±0.3	1.0 to 1.4	4.6	IE

Series HT

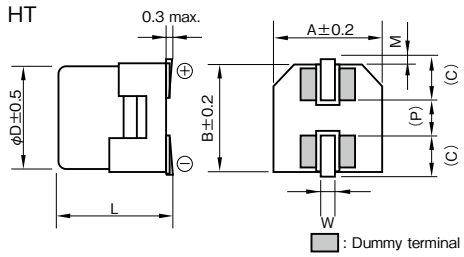

( ) : Reference size

φD	L	A	B	C	M	W	P	Casing symbol
8	10±0.5	8.4	8.4	3.0	0.4±0.2	0.7 to 1.1	3.1	G10
10	10±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	H10
10	12.5±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	HC5
12.5	13.5±0.5	13.0	13.0	4.9	0.7±0.3	1.0 to 1.4	4.6	IE

• Soldering conditions are described on page 15.
• Land pattern size are described on page 13.
• The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	120	1k	10k	100k or more
6.3 to 100	0.10	0.30	0.60	1

Part numbering system

HV (example : 35V270μF)

HV	—	35	V	271	M	H10	E	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

HT (example : 35V270μF)

HT	—	35	V	271	M	H10	E	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3			10			16			25		
	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)
33	—	—	—	—	—	—	—	—	—	5×5.8	80	900
47	—	—	—	—	—	—	5×5.8	70	900	—	—	—
56	—	—	—	—	—	—	—	—	—	6.3×5.8	50	1300
82	—	—	—	—	—	—	6.3×5.8	45	1600	—	—	—
100	—	—	—	6.3×5.8	45	1600	—	—	—	6.3×7.7	30	2000
150	—	—	—	—	—	—	6.3×7.7	27	2200	8×8.7	27	2100
220	6.3×5.8	45	1600	6.3×7.7	24	2300	—	—	—	8×10	27	2300
270	—	—	—	—	—	—	8×10	22	2500	10×8.7	25	2400
330	6.3×7.7	24	2300	8×10	22	2500	—	—	—	10×10	20	2500
470	—	—	—	10×10	18	2600	10×10	18	2600	—	—	—
560	8×10	22	2500	—	—	—	—	—	—	10×12.5	18	3500
820	10×10	18	2600	—	—	—	—	—	—	12.5×13.5	15	4000

Rated voltage (V) / Item / Rated capacitance (μF)	35			50			63		
	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)
10	—	—	—	5×5.8	120	750	6.3×5.8	120	1000
22	5×5.8	100	900	6.3×5.8	80	1100	6.3×7.7	80	1500
27	—	—	—	—	—	—	8×8.7	50	1600
33	—	—	—	6.3×7.7	40	1600	8×10	40	1600
47	6.3×5.8	60	1300	8×8.7	35	1700	10×8.7	35	1700
56	—	—	—	—	—	—	10×10	30	1800
68	6.3×7.7	35	2000	8×10	30	1800	—	—	—
82	—	—	—	10×8.7	28	1900	—	—	—
100	8×8.7	30	2100	10×10	28	2000	10×12.5	26	2500
120	—	—	—	—	—	—	12.5×13.5	22	3000
150	8×10	27	2300	10×12.5	24	3000	—	—	—
220	10×8.7	25	2400	—	—	—	—	—	—
270	10×10	20	2500	—	—	—	—	—	—
330	—	—	—	12.5×13.5	20	3600	—	—	—
390	10×12.5	18	3500	—	—	—	—	—	—
560	12.5×13.5	15	4000	—	—	—	—	—	—

Rated voltage (V) / Item / Rated capacitance (μF)	80			100		
	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)
15	—	—	—	10×10	45	1600
22	8×10	45	1550	—	—	—
33	10×10	36	1700	—	—	—

(Note) Rated ripple current : 105℃ , 100kHz ; ESR : 20℃ , 100kHz

HVK,HTK

CONDUCTIVE POLYMER HYBRID
ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Conductive Polymer Hybrid Capacitors

GREEN CAP | SMD | Low ESR | 125℃ 6000hours

- Low ESR and high ripple current are realized.
- HTK is resist to vibration. (30G guaranteed)
- Equivalent to conductive polymer type Aluminum Electrolytic Capacitor. (There are little characteristics change by temperature and frequency)
- Guaranteed 125℃, 6000 hours. (φ5, 6.3V to 16V, 63V or more : 4000 hours)

Marking color : Blue print

Vibration resistance ⇦ High temperature

HTK ⇦ HVK ⇦ HV

Specifications

Item	Performance
Category temperature range (℃)	−55~+125
Tolerance at rated capacitance (%)	±20 (20℃, 120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	(20℃, 120Hz)
Characteristics at high and low temperature	Impedance ratio (max.) (100kHz)
Endurance (125℃) (Applied ripple current)	
Shelf life (125℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1.

Tangent of loss angle (tanδ):

Rated voltage (V)	6.3	10	16	25	35	50	63	80	100
tanδ (max.)	0.20	0.18	0.16	0.14	0.12	0.10	0.08	0.08	0.08

Impedance ratio (max.):

Z−25℃/Z+20℃	1.5
Z−55℃/Z+20℃	2.0

Endurance (125℃) (Applied ripple current):

Test time	6000 hours (φ5, 6.3V to 16V, 63V or more : 4000 hours)
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±30% of initial value
Tangent of the loss angle	200% or less of the initial specified value
ESR change	200% or less of the initial specified value

Outline Drawing

Unit : mm

Series HVK

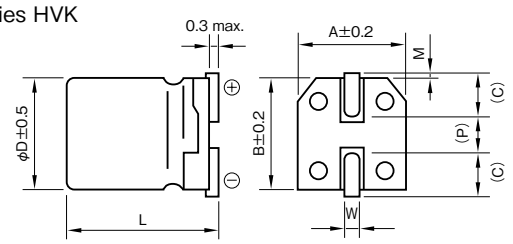

( ) : Reference size

φD	L	A	B	C	M	W	P	Casing symbol
5	5.8±0.3	5.3	5.3	2.3	0.4±0.2	0.5 to 0.8	1.5	E61
6.3	5.8±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	F61
6.3	7.7±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	F80
8	8.7±0.3	8.4	8.4	3.0	0.4±0.2	0.5 to 0.8	3.1	G90
8	10±0.5	8.4	8.4	3.0	0.4±0.2	0.7 to 1.1	3.1	G10
10	8.7±0.3	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	H90
10	10±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	H10
10	12.5±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	HC5
12.5	13.5±0.5	13.0	13.0	4.9	0.7±0.3	1.0 to 1.4	4.6	IE

Series HTK

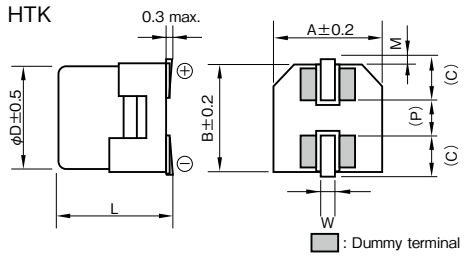

( ) : Reference size

φD	L	A	B	C	M	W	P	Casing symbol
8	10±0.5	8.4	8.4	3.0	0.4±0.2	0.7 to 1.1	3.1	G10
10	10±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	H10
10	12.5±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	HC5
12.5	13.5±0.5	13.0	13.0	4.9	0.7±0.3	1.0 to 1.4	4.6	IE

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	120	1k	10k	100k or more
6.3 to 100	0.10	0.30	0.60	1

Part numbering system (6000 hours guaranteed)

HVK (example : 35V270μF)

HVK	—	35	V	271	M	H10	B	—	□
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

HTK (example : 35V270μF)

HTK	—	35	V	271	M	H10	B	—	□
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

(4000 hours guaranteed)

HVK (example : 16V470μF)

HVK	—	16	V	471	M	H10	E	—	□
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

HTK (example : 63V56μF)

HTK	—	63	V	560	M	H10	E	—	□
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3			10			16			25		
	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)
33	—	—	—	—	—	—	—	—	—	5×5.8	80	550
47	—	—	—	—	—	—	5×5.8	70	600	—	—	—
56	—	—	—	—	—	—	—	—	—	6.3×5.8	50	900
82	—	—	—	—	—	—	6.3×5.8	45	950	—	—	—
100	—	—	—	6.3×5.8	45	950	—	—	—	6.3×7.7	30	1400
150	—	—	—	—	—	—	6.3×7.7	27	1450	8×8.7	27	1500
220	6.3×5.8	45	950	6.3×7.7	24	1450	—	—	—	8×10	27	1600
270	—	—	—	—	—	—	8×10	22	1700	10×8.7	25	1700
330	6.3×7.7	24	1450	8×10	22	1700	—	—	—	10×10	20	2000
470	—	—	—	10×10	18	2100	10×10	18	2100	—	—	—
560	8×10	22	1700	—	—	—	—	—	—	10×12.5	18	3000
820	10×10	18	2100	—	—	—	—	—	—	12.5×13.5	15	3500

Rated voltage (V) / Item / Rated capacitance (μF)	35			50			63		
	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)
10	—	—	—	5×5.8	120	500	6.3×5.8	120	700
22	5×5.8	100	550	6.3×5.8	80	750	6.3×7.7	80	900
27	—	—	—	—	—	—	8×8.7	50	1000
33	—	—	—	6.3×7.7	40	1100	8×10	40	1100
47	6.3×5.8	60	900	8×8.7	35	1200	10×8.7	35	1200
56	—	—	—	—	—	—	10×10	30	1400
68	6.3×7.7	35	1400	8×10	30	1250	—	—	—
82	—	—	—	10×8.7	28	1400	—	—	—
100	8×8.7	30	1500	10×10	28	1600	10×12.5	26	2000
120	—	—	—	—	—	—	12.5×13.5	22	2500
150	8×10	27	1600	10×12.5	24	2500	—	—	—
220	10×8.7	25	1700	—	—	—	—	—	—
270	10×10	20	2000	—	—	—	—	—	—
330	—	—	—	12.5×13.5	20	3000	—	—	—
390	10×12.5	18	3000	—	—	—	—	—	—
560	12.5×13.5	15	3500	—	—	—	—	—	—

Rated voltage (V) / Item / Rated capacitance (μF)	80			100		
	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)
15	—	—	—	10×10	45	1000
22	8×10	45	1100	—	—	—
33	10×10	36	1200	—	—	—

(Note) Rated ripple current : 125℃ , 100kHz ; ESR : 20℃ , 100kHz

HVX,HTX

CONDUCTIVE POLYMER HYBRID
ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Conductive Polymer Hybrid Capacitors

GREEN CAP | SMD | Low ESR | 135℃ 4000hours

- Low ESR and high ripple current are realized.
- HTX is resist to vibration. (30G guaranteed)
- Equivalent to conductive polymer type Aluminum Electrolytic Capacitor. (There are little characteristics change by temperature and frequency)
- Guaranteed 135℃, 4000 hours.

Vibration resistance ⇦ High temperature

HTX ⇦ HVX ⇦ HVK

Marking color : Blue print

Specifications

Item	Performance
Category temperature range (℃)	−55~+135
Tolerance at rated capacitance (%)	±20 (20℃, 120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 16 / 25 / 35 / 50 tanδ (max.): 0.16 / 0.14 / 0.12 / 0.10 (20℃, 120Hz)
Characteristics at high and low temperature	Impedance ratio (max.) Z−25℃/Z+20℃: 1.5 Z−55℃/Z+20℃: 2.0 (100kHz)
Endurance (135℃) (Applied ripple current)	Test time: 4000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 200% or less of the initial specified value ESR change: 200% or less of the initial specified value
Shelf life (135℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1.

Outline Drawing

Unit : mm

Series HVX

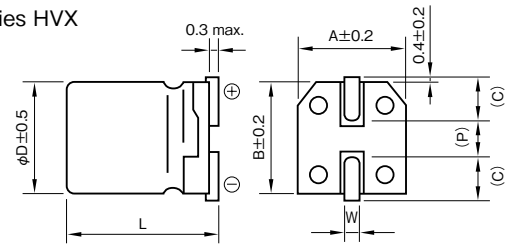

( ) : Reference size

φD	L	A	B	C	W	P	Casing symbol
8	10±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	G10
10	10±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	H10

Series HTX

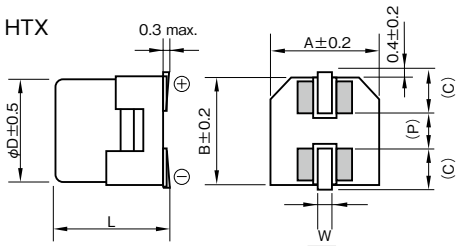

: Dummy terminal
( ) : Reference size

φD	L	A	B	C	W	P	Casing symbol
8	10±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	G10
10	10±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	H10

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	120	1k	10k	100k or more
16 to 50	0.10	0.30	0.60	1

Part numbering system

HVX (example : 16V270μF)

HVX	—	16	V	271	M	G10	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping symbol

HTX (example : 16V270μF)

HTX	—	16	V	271	M	G10	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	16			25			35			50		
	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)
68	—	—	—	—	—	—	—	—	—	8×10	30	1250
100	—	—	—	—	—	—	—	—	—	10×10	28	1600
150	—	—	—	—	—	—	8×10	22	1600	—	—	—
220	—	—	—	8×10	22	1600	—	—	—	—	—	—
270	8×10	20	1700	—	—	—	10×10	20	2000	—	—	—
330	—	—	—	10×10	20	2000	—	—	—	—	—	—
470	10×10	18	2100	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 135℃ , 100kHz ; ESR : 20℃ , 100kHz

HR CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Hybrid Capacitors radial lead type

GREEN CAP | Low ESR | 105℃ 10000hours

- Low ESR and high ripple current are realized.
- Equivalent to conductive polymer type Aluminum Electrolytic Capacitor.
- Guaranteed 105℃, 10000 hours.

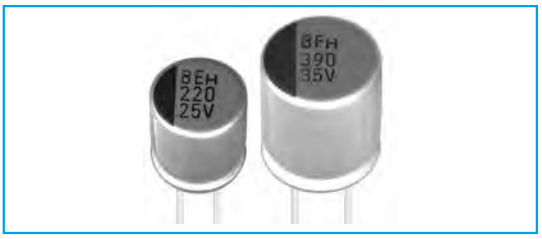

Marking color : Blue print

HR

Specifications

Item	Performance
Category temperature range (℃)	— 55 to +105
Tolerance at rated capacitance (%)	±20 (20℃, 120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 25, 35, 50, 63, 80, 100 tanδ (max.): 0.14, 0.12, 0.10, 0.08, 0.08, 0.08 (20℃, 120Hz)
Characteristics at high and low temperature	Impedance ratio (max.) Z−25℃/Z+20℃: 1.5 Z−55℃/Z+20℃: 2.0 (100kHz)
Endurance (105℃) (Applied ripple current)	Test time: 10000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 200% or less of the initial specified value ESR change: 200% or less of the initial specified value
Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1.

Outline Drawing

Unit : mm

Series HR

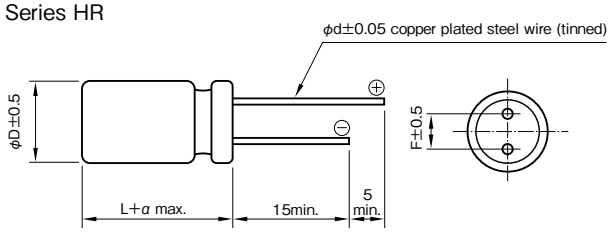

Casing symbol	ϕD	L	F	α	d
G2S	8	10	3.5	1.0	0.6
H2S	10	10	5.0	1.5	0.6
H3	10	12.5	5.0	1.5	0.6

- Soldering conditions are described on page 14.
- The taping specifications are described on page 18,19.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	120	1k	10k	100k
25 to 100	0.10	0.30	0.60	1

Part numbering system

HR (example : 35V270μF)

HR	—	35	V	271	M	H2S	E	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping (Forming) symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	25			35			50			63		
	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)
33	—	—	—	—	—	—	—	—	—	8×10	40	1600
56	—	—	—	—	—	—	—	—	—	10×10	30	1800
68	—	—	—	—	—	—	8×10	30	1800	—	—	—
100	—	—	—	—	—	—	10×10	28	2000	10×12.5	26	2500
150	—	—	—	8×10	27	2300	10×12.5	24	3000	—	—	—
220	8×10	27	2300	—	—	—	—	—	—	—	—	—
270	—	—	—	10×10	20	2500	—	—	—	—	—	—
330	10×10	20	2500	—	—	—	—	—	—	—	—	—
390	—	—	—	10×12.5	18	3500	—	—	—	—	—	—
560	10×12.5	18	3500	—	—	—	—	—	—	—	—	—

Rated voltage (V) / Item / Rated capacitance (μF)	80			100		
	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)
15	—	—	—	10×10	45	1600
22	8×10	45	1550	—	—	—
33	10×10	36	1700	—	—	—

(Note) Rated ripple current : 105℃ , 100kHz ; ESR : 20℃ , 100kHz

HRK CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Hybrid Capacitors radial lead type

GREEN CAP | Low ESR | 125℃ 6000hours

- Low ESR and high ripple current are realized.
- Equivalent to conductive polymer type Aluminum Electrolytic Capacitor.
- Guaranteed 125℃, 6000 hours.
  (63V or more : 4000 hours)

Marking color : Blue print

HRK ⇦ HR

Specifications

Item	Performance
Category temperature range (℃)	— 55 to +125
Tolerance at rated capacitance (%)	±20 (20℃, 120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 25, 35, 50, 63, 80, 100 tanδ (max.): 0.14, 0.12, 0.10, 0.08, 0.08, 0.08 (20℃, 120Hz)
Characteristics at high and low temperature	Impedance ratio (max.) Z−25℃/Z+20℃: 1.5 Z−55℃/Z+20℃: 2.0 (100kHz)
Endurance (125℃) (Applied ripple current)	Test time: 6000 hours (63V or more : 4000 hours) Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 200% or less of the initial specified value ESR change: 200% or less of the initial specified value
Shelf life (125℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1.

Outline Drawing

Unit : mm

Series HRK

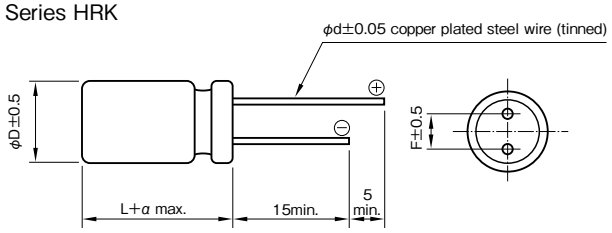

Casing symbol	φD	L	F	α	d
G2S	8	10	3.5	1.0	0.6
H2S	10	10	5.0	1.5	0.6
H3	10	12.5	5.0	1.5	0.6

- Soldering conditions are described on page 14.
- The taping specifications are described on page 18,19.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	120	1k	10k	100k
25 to 100	0.10	0.30	0.60	1

Part numbering system

(4000hours guaranteed)
HRK (example : 63V56μF)

HRK	—	63	V	560	M	H2S	E	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping (Forming) symbol

(6000hours guaranteed)
HRK (example : 35V270μF)

HRK	—	35	V	271	M	H2S	B	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping (Forming) symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	25			35			50			63		
	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)
33	—	—	—	—	—	—	—	—	—	8×10	40	1100
56	—	—	—	—	—	—	—	—	—	10×10	30	1400
68	—	—	—	—	—	—	8×10	30	1250	—	—	—
100	—	—	—	—	—	—	10×10	28	1600	10×12.5	26	2000
150	—	—	—	8×10	27	1600	10×12.5	24	2500	—	—	—
220	8×10	27	1600	—	—	—	—	—	—	—	—	—
270	—	—	—	10×10	20	2000	—	—	—	—	—	—
330	10×10	20	2000	—	—	—	—	—	—	—	—	—
390	—	—	—	10×12.5	18	3000	—	—	—	—	—	—
560	10×12.5	18	3000	—	—	—	—	—	—	—	—	—

Rated voltage (V) / Item / Rated capacitance (μF)	80			100		
	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)
15	—	—	—	10×10	45	1000
22	8×10	45	1100	—	—	—
33	10×10	36	1200	—	—	—

(Note) Rated ripple current : 125℃ , 100kHz ; ESR : 20℃ , 100kHz

PVG ALUMINUM ELECTROLYTIC CAPACITORS WITH CONDUCTIVE POLYMER SOLID ELECTROLYTE

ELNA®

Chip Type

GREEN CAP | SMD | Low ESR | 105℃ 2000hours | Anti-cleaning solvent

- Super low ESR and high ripple current are realized.
- Guaranteed 105℃, 2000 hours.

High CV Low ESR ⇦ PVG ⇦ PVX ⇦ PVM (High CV Low ESR)

Marking color : Blue print

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.) *Note	0.2CV (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of the loss angle (tanδ)	0.12 or less (20℃,120Hz)
Characteristics at high and low temperature	Impedance ratio (max.) Z−25℃/Z+20℃ : 1.15 Z−55℃/Z+20℃ : 1.25 (100kHz)
Endurance (105℃) (Applied ripple current)	Test time: 2000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 150% or less of the initial specified value ESR change: 150% or less of the initial specified value
Bias Humidity 60℃, 90 to 95%RH	Test time: 500 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 150% or less of the initial specified value ESR change: 150% or less of the initial specified value
Characteristics of applied surge voltage	The capacitors shall be subject to 1000 cycles each consisting of charge with the surge voltage specified at 105℃ for 30 seconds through a protective resister (Rc=1kΩ) in 6 minutes per cycle. Surge voltage : 1.15 times of rated voltage Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 150% or less of the initial specified value ESR change: 150% or less of the initial specified value
Failure tare	0.5% per 1000 hours maximum (Confidence level 60% at 105℃)

*Note : If any doubt arises, measure the leakage current after following voltage application treatment.
Voltage application treatment : DC rated voltage are applied to the capacitors for 120 minutes at 105℃.

Outline Drawing

Unit : mm

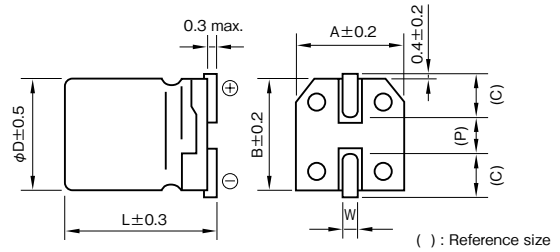

φD	L	A	B	C	W	P	Casing symbol
5	5.7	5.3	5.3	2.3	0.5 to 0.8	1.5	E60
6.3	5.7	6.6	6.6	2.7	0.5 to 0.8	2.0	F60
6.3	7.7	6.6	6.6	2.7	0.5 to 0.8	2.0	F80
8	7.7	8.4	8.4	3.0	0.5 to 0.8	3.1	G80
10	7.7	10.4	10.4	3.3	0.7 to 1.1	4.7	H80

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Part numbering system (example : 4V150μF)

PVG	—	4	V	151	M	E60	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	2.5			4			6.3		
	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)
120	—	—	—	—	—	—	5×5.7	8	4000
150	—	—	—	5×5.7	8	4000	—	—	—
220	5×5.7	8	4000	6.3×5.7	6	4500	6.3×5.7	7	4300
270	—	—	—	6.3×5.7	6	4500	6.3×7.7	7	4600
330	6.3×5.7	6	4500	6.3×7.7	6	4800	8×7.7	7	4700
390	6.3×5.7	6	4500	6.3×7.7	6	4800	—	—	—
470	6.3×7.7	6	4800	8×7.7	6	5000	8×7.7	7	4700
560	6.3×7.7	6	4800	—	—	—	8×7.7	7	4700
680	—	—	—	8×7.7	6	5000	—	—	—
820	—	—	—	—	—	—	10×7.7	7	4900
1000	8×7.7	6	5000	10×7.7	6	5200	—	—	—
1200	10×7.7	6	5200	—	—	—	—	—	—

(Note) Rated ripple current : 105℃, 100kHz ; ESR : 20℃, 100kHz

PVX

ALUMINUM ELECTROLYTIC CAPACITORS WITH CONDUCTIVE POLYMER SOLID ELECTROLYTE

ELNA®

Chip Type

GREEN CAP | SMD | Low ESR | 105℃ 2000hours | Anti-cleaning solvent

- Super low ESR and high ripple current are realized.
- Guaranteed 105℃, 2000 hours.

High CV Low ESR ⇦ PVX ⇦ PVM ⇦ High CV Low ESR PVH

Marking color : Blue print

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.) *Note	0.2CV (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of the loss angle (tanδ)	0.12 or less (20℃,120Hz)
Characteristics at high and low temperature	Impedance ratio (max.) Z−25℃/Z+20℃ : 1.15 Z−55℃/Z+20℃ : 1.25 (100kHz)
Endurance (105℃) (Applied ripple current)	Test time: 2000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 150% or less of the initial specified value ESR change: 150% or less of the initial specified value
Bias Humidity 60℃, 90 to 95%RH	Test time: 500 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 150% or less of the initial specified value ESR change: 150% or less of the initial specified value
Characteristics of applied surge voltage	The capacitors shall be subject to 1000 cycles each consisting of charge with the surge voltage specified at 105℃ for 30 seconds through a protective resister (Rc=1kΩ) in 6 minutes per cycle. Surge voltage : 1.15 times of rated voltage Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 150% or less of the initial specified value ESR change: 150% or less of the initial specified value
Failure tare	0.5% per 1000 hours maximum (Confidence level 60% at 105℃)

*Note : If any doubt arises, measure the leakage current after following voltage application treatment.
Voltage application treatment : DC rated voltage are applied to the capacitors for 120 minutes at 105℃.

Outline Drawing

Unit : mm

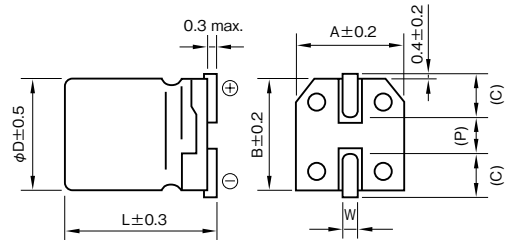

( ) : Reference size

φD	L	A	B	C	W	P	Casing symbol
5	5.7	5.3	5.3	2.3	0.5 to 0.8	1.5	E60
6.3	5.7	6.6	6.6	2.7	0.5 to 0.8	2.0	F60
8	6.7	8.4	8.4	3.0	0.5 to 0.8	3.1	G70
10	7.7	10.4	10.4	3.3	0.7 to 1.1	4.7	H80

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Part numbering system (example : 4V150μF)

PVX	—	4	V	151	M	E60	E —	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	2.5			4			6.3			10		
	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)
100	—	—	—	—	—	—	5×5.7	15	3100	5×5.7	15	3100
120	—	—	—	—	—	—	—	—	—	6.3×5.7	13	3300
150	5×5.7	10	3800	5×5.7	10	3800	5×5.7	15	3100	—	—	—
220	5×5.7	10	3800	5×5.7	10	3800	6.3×5.7	9	4000	8×6.7	10	3800
270	5×5.7	10	3800	—	—	—	—	—	—	—	—	—
330	6.3×5.7	9	4000	6.3×5.7	9	4000	8×6.7	8	4300	8×6.7	10	3800
390	6.3×5.7	9	4000	—	—	—	8×6.7	8	4300	—	—	—
470	8×6.7	8	4300	8×6.7	8	4300	8×6.7	8	4300	10×7.7	10	4000
560	8×6.7	8	4300	8×6.7	8	4300	—	—	—	—	—	—
680	8×6.7	8	4300	10×7.7	8	4600	—	—	—	—	—	—
820	—	—	—	—	—	—	10×7.7	8	4600	—	—	—
1000	10×7.7	8	4600	10×7.7	8	4600	—	—	—	—	—	—
1200	10×7.7	8	4600	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105℃, 100kHz ; ESR : 20℃, 100kHz

PVM ALUMINUM ELECTROLYTIC CAPACITORS WITH CONDUCTIVE POLYMER SOLID ELECTROLYTE

ELNA®

Chip Type

GREEN CAP | SMD | Low ESR | 105℃ 2000hours | Anti-cleaning solvent

- Super low ESR and high ripple current are realized.
- Guaranteed 105℃, 2000 hours.

High CV
Low ESR

PVM ⇦ PVH

Marking color : Blue print

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.) *Note	0.2CV (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of the loss angle (tanδ)	0.12 or less (20℃,120Hz)
Characteristics at high and low temperature	Impedance ratio (max.): Z−25℃/Z+20℃ 1.15; Z−55℃/Z+20℃ 1.25 (100kHz)
Endurance (105℃) (Applied ripple current)	Test time: 2000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 150% or less of the initial specified value ESR change: 150% or less of the initial specified value
Bias Humidity 60℃, 90 to 95%RH	Test time: 500 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 150% or less of the initial specified value ESR change: 150% or less of the initial specified value
Characteristics of applied surge voltage	The capacitors shall be subject to 1000 cycles each consisting of charge with the surge voltage specified at 105℃ for 30 seconds through a protective resister (Rc=1kΩ) in 6 minutes per cycle. Surge voltage : 1.15 times of rated voltage Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 150% or less of the initial specified value ESR change: 150% or less of the initial specified value
Failure tare	0.5% per 1000 hours maximum (Confidence level 60% at 105℃)

*Note : If any doubt arises, measure the leakage current after following voltage application treatment.
Voltage application treatment : DC rated voltage are applied to the capacitors for 120 minutes at 105℃.

Outline Drawing

Unit : mm

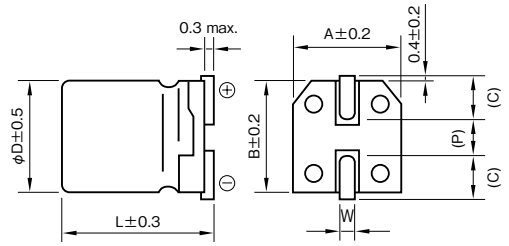

( ) : Reference size

φD	L	A	B	C	W	P	Casing symbol
5	5.7	5.3	5.3	2.3	0.5 to 0.8	1.5	E60
6.3	5.7	6.6	6.6	2.7	0.5 to 0.8	2.0	F60
8	6.7	8.4	8.4	3.0	0.5 to 0.8	3.1	G70
10	7.7	10.4	10.4	3.3	0.7 to 1.1	4.7	H80

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Part numbering system (example : 4V150μF)

PVM	—	4	V	151	M	E60	E	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	2.5			4			6.3			10			16		
	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)
33	—	—	—	—	—	—	—	—	—	—	—	—	5×5.7	35	2070
39	—	—	—	—	—	—	—	—	—	—	—	—	5×5.7	35	2070
47	—	—	—	—	—	—	—	—	—	5×5.7	28	2310	6.3×5.7	28	2340
56	—	—	—	—	—	—	—	—	—	5×5.7	28	2310	—	—	—
68	—	—	—	—	—	—	—	—	—	5×5.7	28	2310	6.3×5.7	28	2340
100	—	—	—	5×5.7	22	2610	5×5.7	24	2500	6.3×5.7	25	2530	8×6.7	24	3010
120	—	—	—	—	—	—	5×5.7	24	2500	6.3×5.7	25	2530	8×6.7	24	3010
150	—	—	—	5×5.7	22	2610	—	—	—	—	—	—	—	—	—
180	5×5.7	21	2670	—	—	—	—	—	—	—	—	—	—	—	—
220	5×5.7	21	2670	5×5.7	22	2610	6.3×5.7	15	3160	8×6.7	21	3220	10×7.7	22	3450
270	—	—	—	6.3×5.7	15	3160	—	—	—	8×6.7	21	3220	—	—	—
330	6.3×5.7	15	3160	6.3×5.7	15	3160	8×6.7	14	3950	10×7.7	19	3800	—	—	—
390	6.3×5.7	15	3160	—	—	—	8×6.7	14	3950	—	—	—	—	—	—
470	8×6.7	13	3600	8×6.7	14	3950	8×6.7	14	3950	10×7.7	19	3800	—	—	—
560	8×6.7	13	3600	8×6.7	14	3950	—	—	—	—	—	—	—	—	—
680	8×6.7	13	3600	—	—	—	—	—	—	—	—	—	—	—	—
820	—	—	—	—	—	—	10×7.7	14	4300	—	—	—	—	—	—
1000	10×7.7	13	4450	10×7.7	14	4300	—	—	—	—	—	—	—	—	—
1200	10×7.7	13	4450	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105℃, 100kHz ; ESR : 20℃, 100kHz

PVK ALUMINUM ELECTROLYTIC CAPACITORS WITH CONDUCTIVE POLYMER SOLID ELECTROLYTE

ELNA®

ALUMINUM

POLYMER HYBRID

125℃

Chip Type

GREEN CAP | SMD | Low ESR | 125℃ 1000hours | Anti-cleaning solvent

- Super low ESR and high ripple current are realized.
- Guaranteed 125℃, 1000 hours.

High temperature

PVK ⇦ PVH

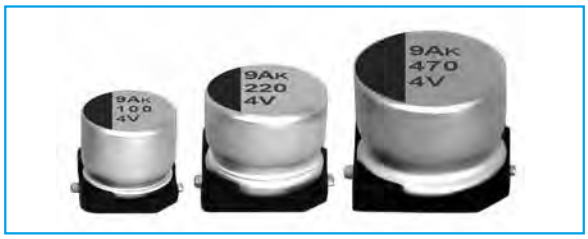

Marking color : Blue print

Specifications

Item	Performance
Category temperature range (℃)	−55 to +125
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.) *Note	0.2CV (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of the loss angle (tanδ)	0.12 or less (20℃,120Hz)
Characteristics at high and low temperature	Impedance ratio (max.): Z−25℃/Z+20℃ 1.15; Z−55℃/Z+20℃ 1.25 (100kHz)
Endurance (125℃) (Applied ripple current)	Test time: 1000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 150% or less of the initial specified value ESR change: 150% or less of the initial specified value
Bias Humidity 60℃, 90 to 95%RH	Test time: 500 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 150% or less of the initial specified value ESR change: 150% or less of the initial specified value
Characteristics of applied surge voltage	The capacitors shall be subject to 1000 cycles each consisting of charge with the surge voltage specified at 125℃ for 30 seconds through a protective resister (Rc=1kΩ) in 6 minutes per cycle. Surge voltage : 1.15 times of rated voltage Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 150% or less of the initial specified value ESR change: 150% or less of the initial specified value
Failure tare	0.5% per 1000 hours maximum (Confidence level 60% at 125℃)

*Note : If any doubt arises, measure the leakage current after following voltage application treatment.
Voltage application treatment : DC rated voltage are applied to the capacitors for 120 minutes at 125℃.

Outline Drawing

Unit : mm

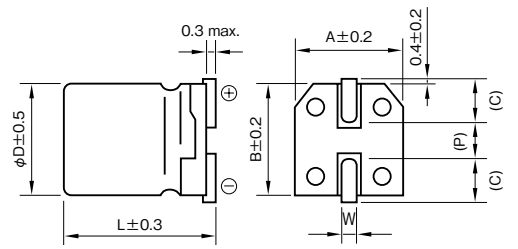

( ) : Reference size

φD	L	A	B	C	W	P	Casing symbol
6.3	5.7	6.6	6.6	2.7	0.5 to 0.8	2.0	F60
8	6.7	8.4	8.4	3.0	0.5 to 0.8	3.1	G70
10	7.7	10.4	10.4	3.3	0.7 to 1.1	4.7	H80

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Part numbering system (example : 4V150μF)

PVK	—	4	V	151	M	F60	E	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	2.5			4			6.3			10			16		
	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (mΩ max.)	Rated ripple current (mArms)
33	—	—	—	—	—	—	—	—	—	—	—	—	6.3×5.7	37	590
39	—	—	—	—	—	—	—	—	—	—	—	—	6.3×5.7	37	590
47	—	—	—	—	—	—	—	—	—	6.3×5.7	31	680	6.3×5.7	37	590
56	—	—	—	—	—	—	—	—	—	6.3×5.7	31	680	—	—	—
68	—	—	—	—	—	—	6.3×5.7	27	720	—	—	—	—	—	—
82	—	—	—	—	—	—	6.3×5.7	27	720	—	—	—	8×6.7	30	830
100	—	—	—	6.3×5.7	26	770	6.3×5.7	27	720	8×6.7	27	880	8×6.7	30	830
120	—	—	—	—	—	—	6.3×5.7	27	720	8×6.7	27	880	—	—	—
150	—	—	—	6.3×5.7	26	770	8×6.7	25	960	8×6.7	27	880	10×7.7	26	930
180	—	—	—	—	—	—	—	—	—	—	—	—	10×7.7	26	930
220	6.3×5.7	25	770	8×6.7	25	960	8×6.7	25	960	10×7.7	24	1010	—	—	—
270	—	—	—	—	—	—	—	—	—	10×7.7	24	1010	—	—	—
330	8×6.7	23	960	8×6.7	25	960	10×7.7	20	1100	10×7.7	24	1010	—	—	—
470	8×6.7	23	960	10×7.7	20	1100	10×7.7	20	1100	—	—	—	—	—	—
560	8×6.7	23	960	—	—	—	—	—	—	—	—	—	—	—	—
680	—	—	—	10×7.7	20	1100	—	—	—	—	—	—	—	—	—
1000	10×7.7	19	1100	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 125℃, 100kHz ; ESR : 20℃, 100kHz

PRM ALUMINUM ELECTROLYTIC CAPACITORS WITH CONDUCTIVE POLYMER SOLID ELECTROLYTE

ELNA®

Radial lead Type

GREEN CAP | Low ESR | 105℃ 2000hours | Anti-cleaning solvent

- Low ESR and high ripple current are realized.
- Guaranteed 105℃, 2000 hours.

PRM

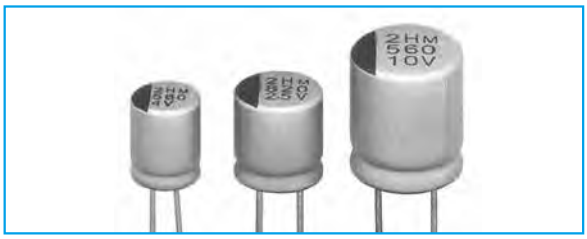

Marking color : Red print

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.) *Note	0.2CV or whichever is larger (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of the loss angle (tanδ)	values of Standard Ratings or less (20℃,120Hz)
Characteristics at high and low temperature	Impedance ratio (max.): Z−55℃/Z+20℃ = 1.25 (100kHz)
Endurance (105℃) (Applied ripple current)	Test time: 2000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 150% or less of the initial specified value ESR change: 200% or less of the initial specified value
Damp heat, steady state (humidity) 60℃, 90 to 95%RH	Test time: 1000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 150% or less of the initial specified value ESR change: 200% or less of the initial specified value
Characteristics of applied surge voltage	The capacitors shall be subject to 1000 cycles each consisting of charge with the surge voltage specified at 105℃ for 30 seconds through a protective resister (Rc=1kΩ) in 6 minutes per cycle. Surge voltage : 1.15 times of rated voltage Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 150% or less of the initial specified value ESR change: 150% or less of the initial specified value
Failure tare	0.5% per 1000 hours maximum (Confidence level 60% at 105℃)

*Note : If any doubt arises, measure the leakage current after following voltage application treatment.
Voltage application treatment : DC rated voltage are applied to the capacitors for 120 minutes at 105℃.

Outline Drawing

Unit : mm

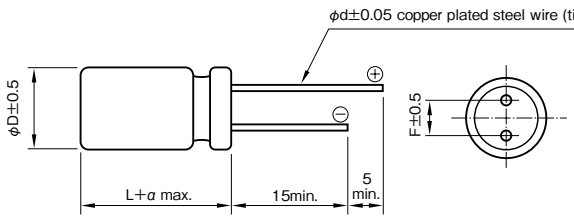

φD	L	F	α	d	Casing symbol
6.3	8.0	2.5	1.0	0.6	F2
8	8.0	3.5	1.0	0.6	G2
10	12.5	5.0	1.5	0.6	H3

Part numbering system (example : 4V560μF)

PRM	—	4	V	561	M	F2	B	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol	Optional symbol		Taping symbol

- Soldering conditions are described on page 14.
- The taping specifications are described on page 18,19.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	2.5				4				6.3				10			
	Case φD×L(mm)	tanδ	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L(mm)	tanδ	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L(mm)	tanδ	ESR (mΩ max.)	Rated ripple current (mArms)	Case φD×L(mm)	tanδ	ESR (mΩ max.)	Rated ripple current (mArms)
220	—	—	—	—	—	—	—	—	—	—	—	—	6.3×8.0	0.10	10	4680
270	—	—	—	—	—	—	—	—	—	—	—	—	6.3×8.0	0.10	10	4680
330	6.3×8.0	0.10	7	5600	—	—	—	—	6.3×8.0	0.10	10	4680	8×8.0	0.08	10	5000
390	—	—	—	—	—	—	—	—	—	—	—	—	8×8.0	0.08	10	5000
470	6.3×8.0	0.10	7	5600	—	—	—	—	6.3×8.0	0.10	7	5600	8×8.0	0.08	8	5700
560	6.3×8.0	0.10	7	5600	6.3×8.0	0.10	7	5600	8×8.0	0.08	7	6100	10×12.5	0.12	12	5300
680	—	—	—	—	8×8.0	0.08	6	6100	8×8.0	0.08	8	5700	—	—	—	—
820	8×8.0	0.08	6	6100	8×8.0	0.08	6	6100	10×12.5	0.12	10	5500	—	—	—	—
1000	8×8.0	0.08	6	6100	10×12.5	0.12	8	5500	10×12.5	0.12	10	5500	—	—	—	—
1200	10×12.5	0.12	8	5500	10×12.5	0.12	8	5500	—	—	—	—	—	—	—	—
1500	10×12.5	0.12	8	5500	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105℃ , 100kHz ; ESR : 20℃ , 100kHz

Aluminum Electrolytic Capacitors

Conductive Polymer Hybrid Aluminum Electrolytic Capacitors

Aluminum Electrolytic Capacitors With Conductive Polymer Solid Electrolyte

Chip Type Aluminum Electrolytic Capacitors

Miniature Type Aluminum Electrolytic Capacitors

Large Capacitance Aluminum Electrolytic Capacitors

Aluminum Electrolytic Capacitors for Audio

■ Cautions for Using Aluminum Electrolytic Capacitors

Please read the specification before using ELNA products.

The following cautions should be observed when using our aluminum electrolytic capacitors to assure their maximum stability and performance. When your application design conditions or operating conditions exceed the limit of the product specification, please contact us. If used under conditions beyond the limit of our specifications, it may cause defects such as short circuit, open circuit, leakage, explosion or combustion.

■Cautions for usage

1. DC electrolytic capacitors are polarized.

- If used with a wrong polarity, it creates an abnormal current resulting in a short circuit or damage to itself. Use DC bipolar electrolytic capacitors for use with uncertain or unknown polarity. DC capacitors cannot be used in AC circuits.

2. Use within the rated voltage.

- If a voltage exceeding the rated voltage is applied, it may cause characteristic deterioration or damage due to the increased leakage current.
- When ripple current is loaded, make sure that the peak value of the ripple voltage does not exceed the rated voltage.

3. Using for power supply circuit.

- While aluminum electrolytic capacitors are operated electrolyte liquid inside dries up and E.S.R. (Equivalent Series Resistance) of the capacitor increases. In case operated longer than rated life time, the capacitance much decreases, tangent of loss angle and E.S.R. much increases. Therefore for some case the sum of bias direct voltage and the peak of ripple voltage is over the rated voltage of the capacitor.
- For any type of circuit, in case the sum of bias direct voltage and the peak of ripple voltage is over the rated voltage of the capacitors or in case the minimum voltage is lower than 0 (zero) volt, the voltage control for the capacitors shall be provided.

4. Do not use in a circuit which requires rapid charging or discharging.

- If used in a circuit requiring rapid charging or discharging, it may cause characteristic deterioration or damage to itself due to the heat generated inside the capacitor. In such cases, contact us for our rapid charging/discharging capacitors.

5. Use within the rated ripple current.

- If applied ripple current exceeds rated ripple current, the life of the capacitor may be shortened, or in an extreme case it gets destroyed due to its internal heat. Use high-ripple type capacitors for such circuits.

6. Changes in characteristics due to operating temperature.

- The characteristics of an electrolytic capacitor will change with a change in the temperature. Such changes are temporary and the original characteristics will be restored at the original temperature (if the characteristics are not deteriorated by remaining at a high temperature for a long time). If used at a temperature exceeding the guaranteed temperature range, the capacitor may be damaged due to the increased leakage current. Pay attention to the capacitor temperature being affected by the ambient temperature of the unit, the temperature inside the appliance, the heat radiated by another hot component in the unit and the heat inside the capacitor itself due to the ripple current.
  (1)The electrostatic capacitance is normally shown as the value at 20°C-120Hz. It increases as the temperature raises and decreases as it lowers.
  (2)The tangent of loss angle (tanδ) is normally shown as the value at 20°C-120Hz. It decreases as the ambient temperature gets high and increases as it gets low.
  (3)The leakage current increases as the temperature gets high and decreases as it gets low.

7. Changes in the characteristics due to frequency.

- The characteristics of an electrolytic capacitor will change according to the change in the operating frequency.
  (1)The electrostatic capacity is normally shown as the value at 20°C-120Hz. It decreases as the frequency increases.
  (2)The tangent of loss angle (tanδ) is normally shown as the value at 20°C-120Hz. It increases as the frequency gets high.
  (3)The impedance is normally shown as the value at 100kHz 20°C. It increases as the frequency lowers.

8. Aluminum electrolytic capacitor life.

- The life of an aluminum electrolytic capacitor terminates when it fails due to the deterioration in its electronic characteristics. Temperature and the ripple current since they especially affect the life. See chart on page.

9. Changes in aluminum electrolytic capacitors during storage.

- After storage for a long period, whether unused of mounted on the appliance, the leakage current of an aluminum electrolytic capacitor will increase. This tendency is more prominent when the ambient temperature is high. If a capacitor has been stored for more than 2 years under normal temperature (shorter if high temperature) and it shows increased leakage current, a treatment by voltage application is recommended. Addition of a protective circuit in the design of the appliance is also recommended, considering the effect of the initial increased current.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

10. Insulation between the capacitor case and the cathode terminal.

- The capacitor case and the cathode terminal are connected through the electrolyte which has uncertain resistance. If a complete insulation of the case is necessary, add an insulator at assembly.

11. NC terminal (the supplemental terminal) (series RPK, LJ6, LJ2)

- Since NC terminal is not insulated. It should be mounted at a position electronically independent from all other parts of the circuit.

12. External sleeve

- During a preheating or a hardening of mounting adhesive may cause a sleeve cracked.
  The capacitors are usually sleeved with poly vinyl chloride or poly ethylene terephthalate for the indication purpose only. Please do not consider it as an insulation.

13. Fumigation Process

- When exporting electronic equipment abroad, fumigation process may be performed on wooden packaging material with a halogen (compound) gas such as methyl bromide. Exercise care as this halogen gas may corrode capacitors. Also, use caution to epidemic preventive agent as corrosive component such as halogen may be contained.

14. Specific Operating Environments

- Capacitors may corrode when stored or used in a place filled with acidic toxic gases (such as hydrogen sulfide, sulfurous acid, nitrous acid, chlorine, bromine, methyl bromide, etc.)
  If capacitors are used or stored in such environments, please let us know.

15. Use at a high altitude

- The use of capacitors at high altitudes such as on an airplane causes a large difference between the internal pressure of the capacitors and the atmospheric pressure. However, there is no problem in use under atmospheric pressure up to about an altitude of 10,000 meters. Please check the operation of electronic equipment at the operating environmental temperature because the temperature lowers with increased altitude.
  If the condition is severe like space, please contact us.

16. Hole pitch adjustment of the PCB to the capacitors.

- Set the hole pitch of the PCB to the lead pitch (the "F" distance in the catalog) of the capacitor. Be careful since a short circuit, a cut or an increase in the leakage current etc. may be caused by the stress given to the lead wire terminals due to the difference between the hole pitch and the lead pitch.

17. Capacitors with pressure valves.

- A part of the capacitor case is made thin to have the function as the pressure valve in order to prevent explosion due to the rise of inside pressure when a reverse or excessive voltage is applied to the capacitor. Once it has worked as a valve, the whole capacitor needs to be replaced since the valve will not restore.
- When you use a capacitor with pressure valve, provide certain space above the pressure valve as below to prevent an interference when it works as a valve.

Diameter of the capacitor (mm)	18 or less	20 to 40
Required space above the valve (mm)	2.0 or more	3.0 or more

18. Double-sided PCB's

- When you use electrolytic capacitors on a double sided PCB, be careful not to have the circuit pattern run under where the capacitor is mounted. Otherwise it may cause a short circuit on the PCB depending on the condition of mounting.

19. Regarding to connection of capacitors

- Aluminum electrolytic capacitor has electrolyte liquid so that the most portion of electric loss characteristics came from E.S.R(Equivalent Series Resistance) of electrolyte liquid. Therefore the capacitor is an electronic devise which can flow high ripple current in case the temperature increases and it decreases E.S.R.
  In case connecting two capacitors or more, E.S.R. of the capacitors is close to the resistance of the circuit. Therefore in case current is unbalanced and some capacitors has high ripple current, temperature increase, it makes more high current and finally it is over the rated ripple current.
  For parallel connection of capacitors the proper design of electric circuit such as balancing of each capacitors resistance or control of total ripple current shall be provided to avoid excess ripple current and voltage.
- When two or more capacitors are arranged in series, the voltage given to each capacitors shall be kept below the rated voltage level, by also giving consideration to the balance of the voltage impressed on the capacitors. Further, partial pressure resistor which considers leakage current shall be provided parallel to each condenser not to have over-voltage impressed on.
  Balance resistance are explained on p.106 of our Catalog.

■Cautions for Mounting

1. Cautions for mounting.

- Check the ratings (electrostatic capacitance and rated voltage) of the capacitor before mounting.
- Check the polarity of the capacitor to the chassis.
- Do not drop the capacitor to the floor. Do not use

the dropped capacitor.
- Do not deform the capacitor for mounting.

2. Do not apply excessive pressure to the capacitor, its terminals or lead wires.
- Make sure that the contact path of the capacitor meets the hole pitch of the PCB before mounting.
- Transient recovery voltage may be generated in the capacitor due to dielectric absorption. If required, this voltage can be discharged with a resistor with a value of about 1 kΩ.
- A PCB self-standing (snap-in) type capacitor should be pushed to the end (till there is no space) to the PCB for mounting.
- Do not set the automatic insertion machine to clinch the capacitor lead wires too strong.
- Pay attention to the impact given by the component receptacles of the automatic insertion/mounting machines and the product checker, and from the centering operation.

3. Soldering.
- Do not dip the capacitor into melted solder.
- The soldering conditions
  Chip type : Please refer to page 15.
  small and large type : 260°C, 10 s (max.)
  The preliminary heating and other conditions described in the catalog or product specifications.
- Do not flux other part than the terminals.
- If there is a direct contact between the sleeve of the capacitor and the printed circuit pattern or a metal part of another component such as a lead wire, it may cause shrinkage of crack.
- When you use the capacitor with its sleeve touching directly to the PCB, excessive solder temperature or excessive soldering time may cause the sleeve to shrink or crack during the heat.
- If the application is for extended use, understand and manage the soldering characteristics to avoid abnormal current caused by a contact failure between the capacitor and the PCB.

4. Handling after soldering.
- After soldering, do not tilt, push down or twist the capacitor.
- After soldering, do not hold the capacitor as a handle to carry the PCB.
- After soldering, do not hit the capacitor with any obstacle. If PCB's are piled up for storage, the capacitor should not touch another PCB or component.

5. Cleaning after Soldering
- Recommended cleaning method
  (1)cleaning solutions:
  (a) CLEANTHROUGH 710M, 750H, 750L
  (b) PINEALPHA ST-100S
  (c) Techno Care FRW-4~17
  (d) Isopropyl alcohol (2-propanol)
  (2)Cleaning conditions:
  (a) The temperature of cleaning solution shall be less than 60°C.
  (b) Use immersion or ultrasonic waves within two minutes.
  (c) After cleaning, capacitors and PCB's shall thoroughly be rinsed and dried with hot blast for more than 10 minutes. The temperature of such breeze should be less than the upper category temperature.
  (d) After cleaning, do not keep capacitors in cleaning solution atmosphere or airtight containers.
- During cleaning, control the cleaning solution against contamination.

6. Fixing adhesives and coating materials.
- Do not use fixing adhesive or coating material containing halogen-based solvent.
- Before applying the fixing adhesive or the coating material, make sure that there is no remaining flux or stains between the PCB and the sealed part of the capacitor.
- Before applying the fixing adhesive or the coating material, make sure that the detergent etc. has dried up.
- Do not cover the whole surface of the sealed part (terminal side) of the capacitor with the fixing adhesive or the coating material.
- Observe the description in the catalog or the product specifications concerning the thermal stiffening conditions of the fixing adhesive or the coating material. (If there is no such description, contact us.) When both discrete and SMT components are on the same PCB, the fixing material for the SMT components may cause crack, tear or shrinkage on the external sleeve depending on the thermal stiffening condition.
- Recommended fixing adhesives and coating materials
  Fixing adhesives : Cemedine 1500, Diabond DN83K, Bond G103
  Coating materials : Taffy TF1159, HumiSeal 1B66NS, 1A27NS

■Other Cautions

1. Do not touch capacitor terminals with bare hands.
You may get electric shock or your hand may be burnt. Discharge it with a 1 KΩ resistance before use if necessary.

2. Do not short the capacitor terminals with a conductor.
Do not spill conductive solution including acid or alkaline solution on the capacitor.

3. Periodical inspections should be established for the capacitors used in industrial appliances.
- The following items should be checked:

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

(1)Appearance : Check if there is any open valve or leakage.
(2)Electronic performance : Check the leakage current, the electrostatic capacitance, the tangent of loss angle and other items described in the catalog or the product specifications.

4. Take the following measures in case of emergency.

- If you see gas coming out of the capacitor valve when the set is in operation, turn off the power switch of the unit or unplug the power cord from the outlet.
- Keep your face away from the capacitor pressure valve, since the high temperature gas at over 100°C bursts out when the valve works. If the gas gets into your eyes or your mouth, wash your eyes or your mouth. Do not ingest the capacitor electrolyte. If the electrolyte gets on your skin, wash it out with soap.

5. Storing conditions.

- Avoid high temperature or high humidity when storing capacitors. Keep the storing temperature at 5℃ to 35℃ and the relative humidity not more than 75%.
- The leakage current of an aluminum electrolytic capacitor tends to increase when stored for a long time. This tendency becomes more prominent if the ambient temperature is high. The leakage current will be decreased by voltage application. If necessary, treatment by voltage application should be made on the capacitors which have been stored for a long period (more than 2 years after production).
- Do not store capacitors at a place where there is a possibility that they may get water, salt or oil spill.
- Do not store capacitors at a place where the air contains dense hazardous gas (hydrogen sulfide, sulfurous acid, nitrous acid, chlorine, ammonia, etc.).
- Fumigation treatment with toxic gas covering the whole wooden container frames as moth proofing during shipment may leave residual toxic gas.
- Do not store capacitors at a place where it gets ultraviolet or radioactive rays.

6. Disposing of capacitors.

- Punch a hole or crush the capacitors (to prevent explosion) before incineration at approved facility.
- If they are not to be incinerated, bring them to a professional industrial waste disposal company.

7. Other notes.

- Please refer to the following literature for anything not described in the specification or the catalog.

(Technical report of Japan Electronics and Information Technology Industries Association, EIAJ RCR-2367C “Guideline of notabilia for fixed aluminum electrolytic capacitors for use in electronic equipment”)

Aluminum Electrolytic Capacitors

Conductive Polymer Hybrid Aluminum Electrolytic Capacitors

Aluminum Electrolytic Capacitors With Conductive Polymer Solid Electrolyte

Chip Type Aluminum Electrolytic Capacitors

Miniature Type Aluminum Electrolytic Capacitors

Large Capacitance Aluminum Electrolytic Capacitors

Aluminum Electrolytic Capacitors for Audio

RV5 VERTICAL CHIP TYPE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Chip Type 85°C High CV Capacitors

GREEN CAP | SMD | Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 2000 hours at 85°C.

High CV

RV5 ⇦ RV3

Marking color : Black print
There are also white print on a brown sleeve (φ10)

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 4, 6.3, 10, 16, 25, 35, 50, 63, 100 tanδ (max.): Refer to following page. (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 4, 6.3, 10, 16, 25, 35, 50, 63, 100 Impedance ratio (max.) Z−25℃/Z+20℃: 7, 4, 3, 2, 2, 2, 2, 2, 2 Impedance ratio (max.) Z−40℃/Z+20℃: 17, 10, 8, 6, 4, 3, 3, 3, 3 (120Hz)
Endurance (85℃) (Applied ripple current)	Test time: 2000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 200% or less of the initial specified value
Shelf life (85℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

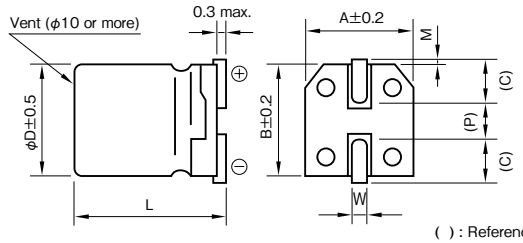

( ) : Reference size

φD	L	A	B	C	M	W	P	Casing symbol
4	5.3±0.2	4.3	4.3	2.0	0.4±0.2	0.5 to 0.8	1.0	D55
5	5.3±0.2	5.3	5.3	2.3	0.4±0.2	0.5 to 0.8	1.5	E55
6.3	5.3±0.2	6.3	6.3	2.7	0.4±0.2	0.5 to 0.8	2.0	F55
6.3	7.7±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	F80
8	6.5±0.3	8.4	8.4	3.4	0.4±0.2	0.5 to 0.8	2.3	G68
8	10±0.5	8.4	8.4	3.0	0.4±0.2	0.7 to 1.1	3.1	G10
10	10±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	H10
12.5	13.5±0.5	13.0	13.0	4.9	0.7±0.3	1.0 to 1.4	4.6	IE

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping spesifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50・60	120	1k	10k・100k
4 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50 to 63	0.80	1	1.35	1.50
100	0.70	1	1.35	1.50

Part numbering system

φ8 or less (example : 16V470μF)

RV5	—	16	V	471	M	G10	U	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

φ10 sleeve less type (example : 16V470μF) * Please inquire sleeve type P/N.

RV5	—	16	V	471	M	H10	EU	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

φ12.5(example : 10V1500μF)

RV5	—	10	V	152	M	IE	T	—	R5
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage(V) / Item / Rated capacitance(μF)	4				6.3				10				16				25			
	Case φD×L (mm)	Casing symbol	tan δ	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	tan δ	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	tan δ	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	tan δ	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	tan δ	Rated ripple current (mArms)
10	–	–	–	–	–	–	–	–	4×5.3	D55	0.24	23	4×5.3	D55	0.20	26	4×5.3	D55	0.18	23
22	–	–	–	–	4×5.3	D55	0.28	31	4×5.3	D55	0.24	26	4×5.3	D55	0.28	30	4×5.3	D55	0.18	24
													5×5.3	E55	0.20	44	5×5.3	E55	0.18	43
33	4×5.3	D55	0.42	31	4×5.3	D55	0.35	28	4×5.3	D55	0.32	32	4×5.3	D55	0.28	32	5×5.3	E55	0.18	54
					5×5.3	E55	0.28	44	5×5.3	E55	0.24	48	5×5.3	E55	0.28	44	6.3×5.3	F55	0.14	67
47	4×5.3	D55	0.42	37	4×5.3	D55	0.35	34	4×5.3	D55	0.32	33	5×5.3	E55	0.28	52	6.3×5.3	F55	0.18	75
					5×5.3	E55	0.28	52	5×5.3	E55	0.32	54	6.3×5.3	F55	0.20	75				
100	5×5.3	E55	0.42	63	5×5.3	E55	0.35	58	5×5.3	E55	0.32	54	6.3×5.3	F55	0.20	70	6.3×7.7	F80	0.18	124
					6.3×5.3	F55	0.28	89	6.3×5.3	F55	0.24	98					8×6.5	G68	0.18	118
150	–	–	–	–	6.3×5.3	F55	0.35	83	6.3×5.3	F55	0.32	79	6.3×7.7	F80	0.28	109	–	–	–	–
									6.3×7.7	F80	0.32	98								
220	6.3×5.3	F55	0.42	110	6.3×5.3	F55	0.35	88	6.3×7.7	F80	0.32	173	6.3×7.7	F80	0.28	162	8×10	G10	0.14	252
					6.3×7.7	F80	0.35	113	8×6.5	G68	0.32	175	8×10	G10	0.20	220				
330	–	–	–	–	6.3×7.7	F80	0.35	188	8×10	G10	0.24	230	8×10	G10	0.20	260	8×10	G10	0.18	300
					8×6.5	G68	0.35	190									10×10	H10	0.14	458
470	–	–	–	–	8×10	G10	0.28	262	8×10	G10	0.32	310	8×10	G10	0.28	307	10×10	H10	0.14	458
													10×10	H10	0.20	458				
680	–	–	–	–	–	–	–	–	–	–	–	–	10×10	H10	0.28	380	–	–	–	–
820	–	–	–	–	8×10	G10	0.35	320	–	–	–	–	–	–	–	–	12.5×13.5	IE	0.14	552
1000	–	–	–	–	10×10	H10	0.28	458	10×10	H10	0.24	454	12.5×13.5	IE	0.20	521	–	–	–	–
1500	–	–	–	–	10×10	H10	0.35	489	12.5×13.5	IE	0.24	560	–	–	–	–	–	–	–	–
2200	–	–	–	–	12.5×13.5	IE	0.30	651	–	–	–	–	–	–	–	–	–	–	–	–

Rated voltage(V) / Item / Rated capacitance(μF)	35				50				63				100			
	Case φD×L (mm)	Casing symbol	tan δ	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	tan δ	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	tan δ	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	tan δ	Rated ripple current (mArms)
1	–	–	–	–	4×5.3	D55	0.10	10	–	–	–	–	–	–	–	–
2.2	–	–	–	–	4×5.3	D55	0.10	15	–	–	–	–	–	–	–	–
3.3	–	–	–	–	4×5.3	D55	0.10	19	4×5.3	D55	0.12	12	–	–	–	–
4.7	4×5.3	D55	0.12	20	4×5.3	D55	0.12	20	5×5.3	E55	0.12	20	–	–	–	–
					5×5.3	E55	0.10	26								
10	4×5.3	D55	0.14	27	5×5.3	E55	0.12	34	6.3×5.3	F55	0.12	32	8×10	G10	0.10	94
	5×5.3	E55	0.12	34	6.3×5.3	F55	0.10	44								
22	5×5.3	E55	0.14	47	6.3×5.3	F55	0.12	47	6.3×7.7	F80	0.12	60	8×10	G10	0.12	94
	6.3×5.3	F55	0.12	59					8×6.5	G68	0.12	62				
33	6.3×5.3	F55	0.14	67	6.3×7.7	F80	0.12	82	8×10	G10	0.10	139	8×10	G10	0.12	94
					8×6.5	G68	0.12	83					10×10	H10	0.10	189
47	6.3×5.3	F55	0.14	54	6.3×7.7	F80	0.12	85	8×10	G10	0.10	139	10×10	H10	0.12	189
	6.3×7.7	F80	0.14	90	8×10	G10	0.10	252	10×10	H10	0.12	226				
100	6.3×7.7	F80	0.14	120	8×10	G10	0.12	252	10×10	H10	0.10	226	12.5×13.5	IE	0.10	242
					10×10	H10	0.10	458								
220	8×10	G10	0.14	260	–	–	–	–	12.5×13.5	IE	0.10	343	–	–	–	–
	10×10	H10	0.12	458												
330	10×10	H10	0.14	360	12.5×13.5	IE	0.10	451	–	–	–	–	–	–	–	–
470	12.5×13.5	IE	0.12	451	–	–	–	–	–	–	–	–	–	–		–

(Note) Rated ripple current : 85° C, 120Hz

RV4 VERTICAL CHIP TYPE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Chip Type 85°C Capacitors (height:4.5mm)

GREEN CAP | SMD | Anti-cleaning solvent

- Compatible with surface mounting for 4.5mm height capacitors.
- Supplied with carrier taping.
- Guarantees 2000 hours at 85℃.

RV4

Low Profile

RV2

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20°C)
Tangent of loss angle (tanδ)	
Characteristics at high and low temperature	
Endurance (85℃) (Applied ripple current)	
Shelf life (85℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Tangent of loss angle (tanδ):

Rated voltage (V)	6.3	10	16	25	35	50
tanδ (max.)	0.30	0.24	0.19	0.16	0.14	0.12

(20°C,120Hz)

Characteristics at high and low temperature:

Rated voltage (V)		6.3	10	16	25	35	50
Impedance ratio (max.)	Z−25℃/Z+20℃	4	3	2	2	2	2
	Z−40℃/Z+20℃	8	8	4	4	3	3

(120Hz)

Endurance (85℃) (Applied ripple current):

Test time	2000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	300% or less of the initial specified value

Outline Drawing

Unit : mm

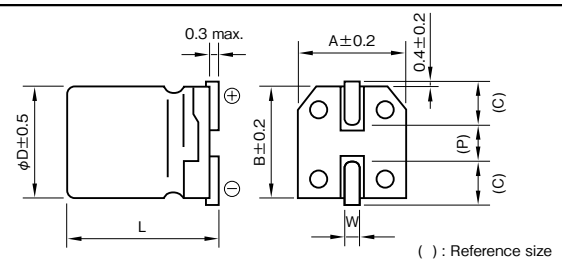

φD	L	A	B	C	W	P	Casing symbol
4	$4.5^{+0.1}_{-0.2}$	4.3	4.3	2.0	0.5 to 0.8	1.0	D46
5	$4.5^{+0.1}_{-0.2}$	5.3	5.3	2.3	0.5 to 0.8	1.5	E46
6.3	$4.5^{+0.1}_{-0.2}$	6.6	6.6	2.7	0.5 to 0.8	2.0	F46

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)		50・60	120	1k	10k・100k
6.3 to 16		0.80	1	1.15	1.25
25 to 35		0.70	1	1.25	1.40
50	1 to 3.3μF	0.50	1	1.35	1.50
	4.7 to 10μF	0.70	1	1.35	1.50

Part numbering system (example : 6.3V47μF)

RV4	—	6	V	470	M	E46	U	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3			10			16			25			35			50		
	Case φD(mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD(mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD(mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD(mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD(mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD(mm)	ESR (Ω)	Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4	199	8
2.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4	90	12
3.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4	60	15
4.7	—	—	—	—	—	—	—	—	—	4	56	17	4	49	18	5	42	21
10	—	—	—	—	—	—	4	32	22	5	27	28	5	23	30	6.3	20	35
22	4	23	26	5	18	34	5	14	38	6.3	12	49	6.3	11	52	—	—	—
33	5	15	37	5	12	42	6.3	10	55	6.3	8	60	—	—	—	—	—	—
47	5	11	45	6.3	8	59	6.3	7	76	—	—	—	—	—	—	—	—	—
100	6.3	5	76	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85℃, 120Hz ; ESR : 20℃, 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Chip Type Bipolar Capacitors (height:5.5mm)

GREEN CAP | SMD | Anti-cleaning solvent

- Compatible with surface mounting for 5.5mm height capacitors.
- Supplied with carrier taping.
- Guarantees 2000 hours at 85℃.

Bipolar

RVB ⇦ RV2

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	
Characteristics at high and low temperature	
Endurance (85℃) (Applied ripple current)	
Shelf life (85℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Tangent of loss angle (tanδ):

Rated voltage (V)		6.3	10	16	25	35	50
tanδ (max.)	φ4	0.35	0.30	0.25	0.25	0.25	0.25
	φ5, 6.3	0.30	0.25	0.20	0.15	0.15	0.15

(20℃,120Hz)

Characteristics at high and low temperature:

Rated voltage (V)		6.3	10	16	25	35	50
Impedance ratio (max.)	Z−25℃/Z+20℃	3	3	2	2	2	2
	Z−40℃/Z+20℃	8	5	4	3	3	3

(120Hz)

Endurance (85℃) (Applied ripple current):

Test time	2000 hours (with the polarity inverted every 250 hours)
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	200% or less of the initial specified value

Outline Drawing

Unit : mm

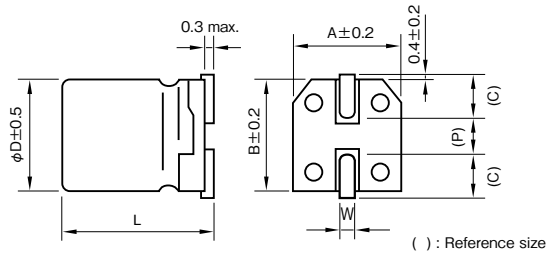

φD	L	A	B	C	W	P
4	5.3±0.2	4.3	4.3	2.0	0.5 to 0.8	1.0
5	5.3±0.2	5.3	5.3	2.3	0.5 to 0.8	1.5
6.3	5.3±0.2	6.6	6.6	2.7	0.5 to 0.8	2.0

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50・60	120	1k	10k・100k
6.3 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50	0.80	1	1.35	1.50

Part numbering system (example : 6.3V47μF)

RVB	—	6	V	470	M	U	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol			Taping symbol

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3			10			16			25			35			50		
	Case φD(mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD(mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD(mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD(mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD(mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD(mm)	ESR (Ω)	Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4	332	7.2
2.2	—	—	—	—	—	—	—	—	—	—	—	—	4	151	10	5	113	14
3.3	—	—	—	—	—	—	—	—	—	4	101	13	5	75	17	5	75	17
4.7	—	—	—	—	—	—	4	88	14	5	53	20	5	53	21	6.3	53	24
10	—	—	—	4	50	18	5	33	26	6.3	25	35	6.3	25	35	—	—	—
22	5	23	27	6.3	19	40	6.3	15	45	—	—	—	—	—	—	—	—	—
33	6.3	15	45	6.3	13	50	6.3	10	55	—	—	—	—	—	—	—	—	—
47	6.3	11	54	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85°C, 120Hz ; ESR : 20°C, 120Hz

Chip Type 105°C Standard Capacitors

GREEN CAP | SMD | 105°C 1000hours | Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 1000 hours at 105°C.

RVS

High temperature

RV2

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)

Tangent of loss angle (tanδ)

Rated voltage (V)	6.3	10	16	25	35	50
tanδ (max.)	0.30	0.26	0.22	0.16	0.13	0.12

(20℃,120Hz)

Characteristics at high and low temperature

Rated voltage (V)		6.3	10	16	25	35	50
Impedance ratio (max.)	Z−25℃/Z+20℃	4	3	2	2	2	2
	Z−40℃/Z+20℃	8	5	4	3	3	3

(120Hz)

Endurance (105℃) (Applied ripple current)

Test time	1000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	200% or less of the initial specified value

Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

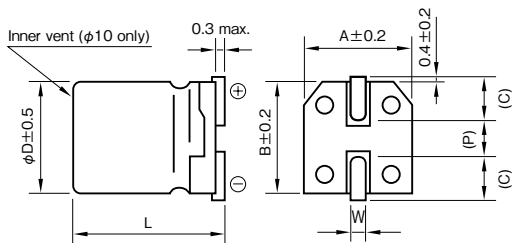

( ): Reference size

φD	L	A	B	C	W	P	Casing symbol
4	5.3±0.2	4.3	4.3	2.0	0.5 to 0.8	1.0	D55
5	5.3±0.2	5.3	5.3	2.3	0.5 to 0.8	1.5	E55
6.3	5.3±0.2	6.6	6.6	2.7	0.5 to 0.8	2.0	F55
6.3	7.7±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	F80
8	6.5±0.3	8.4	8.4	3.4	0.5 to 0.8	2.3	G68
8	10±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	G10
10	10±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	H10
10	10.5±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	HA5

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50・60	120	1k	10k・100k
6.3 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50	0.80	1	1.35	1.50

Part numbering system (example : 16V47μF)

RVS	—	16	V	470	M	F55	U —	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3			10			16			25			35			50		
	Case φD × L(mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD × L(mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD × L(mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD × L(mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD × L(mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD × L(mm)	ESR (Ω)	Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4 × 5.3	199	7
2.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4 × 5.3	91	10
3.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4 × 5.3	60	12
4.7	—	—	—	—	—	—	—	—	—	4 × 5.3	57	12	4 × 5.3	46	14	5 × 5.3	42	17
10	—	—	—	4 × 5.3	43	15	4 × 5.3	36	16	5 × 5.3	27	21	5 × 5.3	22	23	6.3 × 5.3	20	26
22	4 × 5.3	23	21	5 × 5.3	20	25	5 × 5.3	17	28	6.3 × 5.3	12	36	6.3 × 5.3	10	50	8 × 6.5	9.0	51
33	5 × 5.3	15	30	5 × 5.3	13	31	6.3 × 5.3	11	40	6.3 × 5.3	8.0	44	8 × 6.5	6.5	59	6.3 × 7.7	6.0	60
47	5 × 5.3	11	36	6.3 × 5.3	9.2	43	6.3 × 5.3	7.8	47	8 × 6.5	5.6	66	—	—	—	6.3 × 7.7	4.2	63
100	6.3 × 5.3	5.0	61	6.3 × 5.3	4.3	60	6.3 × 5.3	3.6	60	6.3 × 7.7	2.7	91	6.3 × 7.7	2.2	84	8 × 10	2.0	140
150	—	—	—	—	—	—	6.3 × 7.7	2.4	105	8 × 10	1.8	140	8 × 10	1.4	155	10 × 10	1.3	180
220	8 × 6.5	2.3	102	6.3 × 7.7	2.0	105	6.3 × 7.7	1.7	105	8 × 10	1.2	155	8 × 10	0.98	190	10 × 10.5	0.91	220
330	6.3 × 7.7	1.5	105	8 × 10	1.3	195	8 × 10	1.1	195	8 × 10	0.80	190	10 × 10.5	0.65	300	—	—	—
470	8 × 10	1.1	210	8 × 10	0.92	210	8 × 10	0.78	230	10 × 10	0.57	300	—	—	—	—	—	—
680	8 × 10	0.73	210	10 × 10	0.63	310	10 × 10	0.54	310	—	—	—	—	—	—	—	—	—
1000	8 × 10	0.50	210	10 × 10	0.43	310	—	—	—	—	—	—	—	—	—	—	—	—
1500	10 × 10	0.33	310	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105℃ , 120Hz ; ESR : 20℃ , 120Hz

Chip Type 105°C Capacitors (height:6.0mm)

GREEN CAP | SMD | 105°C 2000hours | Anti-cleaning solvent

- Compatible with surface mounting for 6.0mm height capacitors.
- Supplied with carrier taping.
- Guarantees 2000 hours at 105°C.

Long life

RVL ⇦ RVS

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	(20℃,120Hz)
Characteristics at high and low temperature	(120Hz)
Endurance (105℃) (Applied ripple current)	
Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Tangent of loss angle (tanδ):

Rated voltage (V)	6.3	10	16	25	35	50
tanδ (max.)	0.32	0.28	0.24	0.18	0.15	0.14

Characteristics at high and low temperature:

Rated voltage (V)		6.3	10	16	25	35	50
Impedance ratio (max.)	Z−25℃/Z+20℃	4	3	2	2	2	2
	Z−40℃/Z+20℃	8	5	4	3	3	3

Endurance (105℃) (Applied ripple current):

Test time	2000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±30% of initial value
Tangent of the loss angle	300% or less of the initial specified value

Outline Drawing

Unit : mm

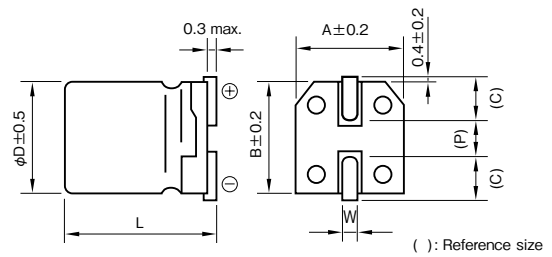

φD	L	A	B	C	W	P	Casing symbol
4	5.7±0.3	4.3	4.3	2.0	0.5 to 0.8	1.0	D60
5	5.7±0.3	5.3	5.3	2.3	0.5 to 0.8	1.5	E60
6.3	5.7±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	F60

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)		50・60	120	1k	10k・100k
6.3 to 16		0.80	1	1.15	1.25
25・35		0.80	1	1.25	1.40
50	1 to 3.3μF	0.50	1	1.35	1.50
	4.7 to 10μF	0.70	1	1.35	1.50

Part numbering system (example : 16V47μF)

RVL	—	16	V	470	M	F60	U	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3 Case φD×L(mm)	6.3 ESR (Ω)	6.3 Rated ripple current (mArms)	10 Case φD×L(mm)	10 ESR (Ω)	10 Rated ripple current (mArms)	16 Case φD×L(mm)	16 ESR (Ω)	16 Rated ripple current (mArms)	25 Case φD×L(mm)	25 ESR (Ω)	25 Rated ripple current (mArms)	35 Case φD×L(mm)	35 ESR (Ω)	35 Rated ripple current (mArms)	50 Case φD×L(mm)	50 ESR (Ω)	50 Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4×5.7	232	12
2.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4×5.7	105	19
3.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4×5.7	70	22
4.7	—	—	—	—	—	—	—	—	—	4×5.7	63	21	4×5.7	53	23	5×5.7	49	29
10	—	—	—	—	—	—	4×5.7	40	27	5×5.7	30	36	5×5.7	25	39	6.3×5.7	23	47
22	—	—	—	—	—	—	5×5.7	18	46	6.3×5.7	14	62	6.3×5.7	11	65	—	—	—
33	—	—	—	—	—	—	6.3×5.7	12	66	6.3×5.7	9.0	76	—	—	—	—	—	—
47	—	—	—	6.3×5.7	9.9	74	6.3×5.7	8.5	78	—	—	—	—	—	—	—	—	—
100	6.3×5.7	5.3	99	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105℃, 120Hz ; ESR : 20℃, 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Chip Type, 105°C Use, Large Capacitance Capacitors

GREEN CAP | SMD | 105°C 2000hours | Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 2000 hours at 105℃.
  (φ12.5×13.5L : 5000 hours at 105℃)

RVJ

High temperature

RV

Marking color : Black print
There are also white print on a brown sleeve
(10L or more)

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	
Characteristics at high and low temperature	
Endurance (105℃) (Applied ripple current)	
Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Tangent of loss angle (tanδ):

Rated voltage (V)	6.3	10	16	25	35	50	63	100
tanδ (max.)	0.30	0.24	0.22	0.16	0.13	0.12	0.11	0.10

(20℃,120Hz)

Characteristics at high and low temperature:

Rated voltage (V)		6.3	10	16	25	35	50	63	100
Impedance ratio (max.)	Z−25℃/Z+20℃	4	3	2	2	2	2	2	2
	Z−40℃/Z+20℃	8	5	4	3	3	3	3	3

(120Hz)

Endurance (105℃) (Applied ripple current):

Test time	2000 hours (φ12.5×13.5L : 5000 hours)
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	200% or less of the initial specified value

Outline Drawing

Unit : mm

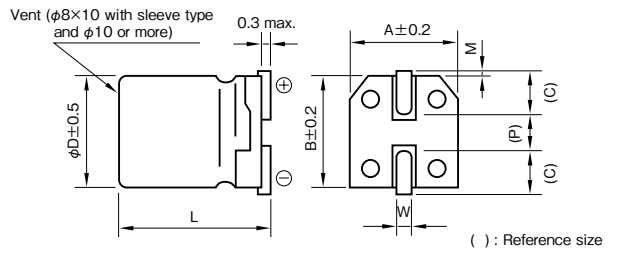

φD	L	A	B	C	M	W	P	Casing symbol
8	6.5±0.3	8.4	8.4	3.4	0.4±0.2	0.5 to 0.8	2.3	G68
8	10±0.5	8.4	8.4	3.0	0.4±0.2	0.7 to 1.1	3.1	G10
10	10±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	H10
12.5	13.5±0.5	13.0	13.0	4.9	0.7±0.3	1.0 to 1.4	4.6	IE

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

φ8,φ10

Rated voltage (V) \ Frequency (Hz)	50・60	120	1k	10k・100k
6.3 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50 to 63	0.80	1	1.35	1.50
100	0.70	1	1.35	1.50

φ12.5

Rated capacitance(μF) \ Frequency (Hz)	120	1k	10k	100k
47	0.50	0.76	0.87	1
100 to 220	0.70	0.85	0.90	1
330 to 1000	0.80	0.93	0.98	1

Part numbering system

φ8×6.5L(example : 25V47μF)

RVJ	—	25	V	470	M	G68	U	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

φ8×10L(example : 25V100μF) * However, in the case of 100V, should delate "M".

RVJ	—	25	V	101	M	G10	Y1U	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

φ10(example : 16V470μF)

RVJ	—	16	V	471	M	H10	EU	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

φ12.5(example : 10V1000μF)

RVJ	—	10	V	102	M	IE	ET	—	R5
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

*Please inquire sleeve type P/N.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3			10			16			25			35			50			63			100		
	Case φD×L(mm)	Casing symbol	Rated ripple current (mArms)	Case φD×L(mm)	Casing symbol	Rated ripple current (mArms)	Case φD×L(mm)	Casing symbol	Rated ripple current (mArms)	Case φD×L(mm)	Casing symbol	Rated ripple current (mArms)	Case φD×L(mm)	Casing symbol	Rated ripple current (mArms)	Case φD×L(mm)	Casing symbol	Rated ripple current (mArms)	Case φD×L(mm)	Casing symbol	Rated ripple current (mArms)	Case φD×L(mm)	Casing symbol	Rated ripple current (mArms)
10	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	8×10	G10	67
22	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	8×6.5	G68	110	8×10	G10	99	10×10	H10	133
33	—	—	—	—	—	—	—	—	—	—	—	—	8×6.5	G68	110	8×10	G10	178	10×10	H10	160	10×10	H10	133
47	—	—	—	—	—	—	—	—	—	8×6.5	G68	110	8×6.5 8×10	G68 G10	110 178	8×10	G10	178	10×10	H10	160	12.5×13.5	IE	475*
100	—	—	—	8×6.5	G68	110	8×6.5 8×10	G68 G10	110 178	8×10	G10	178	10×10	H10	324	8×10 10×10	G10 H10	178 324	12.5×13.5	IE	577*	—	—	—
220	8×10	G10	178	8×10	G10	178	10×10	H10	324	10×10	H10	324	10×10	H10	324	12.5×13.5	IE	655*	—	—	—	—	—	—
330	8×10	G10	178	10×10	H10	324	10×10	H10	324	10×10	H10	324	12.5×13.5	IE	747*	—	—	—	—	—	—	—	—	—
470	10×10	H10	324	10×10	H10	324	10×10	H10	324	12.5×13.5	IE	747*	12.5×13.5	IE	747*	—	—	—	—	—	—	—	—	—
1000	10×10 12.5×13.5	H10 IE	324 747*	10×10 12.5×13.5	H10 IE	324 747*	12.5×13.5	IE	747*	— —	— —	— —	— —	— —	— —	— —	— —	— —	— —	— —	— —	— —	— —	— —

(Note) Rated ripple current : 105℃, 120Hz
(Note＊) Rated ripple current : 105℃, 100kHz

Chip type, 105°C Use, Long Life, High CV Capacitors

GREEN CAP | SMD | 105℃ 2000hours | Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 2000 hours 105℃.

High CV

RVR ⇦ RVL

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF), V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	

Rated voltage (V)	4	6.3	10	16	25	35	50
tanδ (max.)	0.50	0.30	0.22	0.16	0.14	0.12	0.12

(20℃,120Hz)

Characteristics at high and low temperature

Rated voltage (V)		4	6.3	10	16	25	35	50
Impedance ratio (max.)	Z−25℃/Z+20℃	7	4	3	2	2	2	2
	Z−40℃/Z+20℃	15	8	6	4	4	3	3

(120Hz)

Endurance (105℃) (Applied ripple current)

Test time	2000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value(φ5 or Smaller & 16V or less:±30%)
Tangent of loss angle	200% or less of the initial specified value

Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

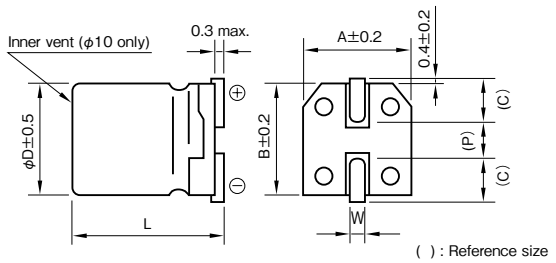

φD	L	A	B	C	W	P	Casing symbol
4	5.3±0.2	4.3	4.3	2.0	0.5 to 0.8	1.0	D55
4	5.8±0.3	4.3	4.3	2.0	0.5 to 0.8	1.0	D61
5	5.3±0.2	5.3	5.3	2.3	0.5 to 0.8	1.5	E55
5	5.8±0.3	5.3	5.3	2.3	0.5 to 0.8	1.5	E61
6.3	5.3±0.2	6.6	6.6	2.7	0.5 to 0.8	2.0	F55
6.3	5.8±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	F61
6.3	7.7±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	F80
8	6.5±0.3	8.4	8.4	3.4	0.5 to 0.8	2.3	G68
8	10±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	G10
8	10.5±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	GA5
10	10±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	H10
10	10.5±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	HA5

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping spesifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50・60	120	1k	10k・100k
6.3 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50	0.50	1	1.35	1.50

Part numbering system (example : 16V100μF)

RVR	—	16	V	101	M	F61	U —	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage(V) / Item / Rated capacitance(μF)	4			6.3			10			16			25		
	Case φD×L (mm)	Casing symbol	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Rated ripple current (mArms)
4.7	–	–	–	–	–	–	–	–	–	–	–	–	4×5.3	D55	22
6.8	–	–	–	–	–	–	–	–	–	–	–	–	4×5.3	D55	25
10	–	–	–	–	–	–	–	–	–	4×5.3	D55	25	4×5.8	D61	36
										4×5.8	D61	27			
22	–	–	–	4×5.3	D55	26	4×5.8	D61	33	4×5.8	D61	39	5×5.8	E61	48
				4×5.8	D61	28				5×5.3	E55	39			
										5×5.8	E61	46			
33	–	–	–	5×5.8	E61	40	4×5.8	D61	41	5×5.8	E61	55	5×5.8	E61	59
							5×5.3	E55	43	6.3×5.8	F61	66	6.3×5.3	F55	65
							5×5.8	E61	47				6.3×5.8	F61	69
47	4×5.8	D61	42	4×5.8	D61	42	6.3×5.8	F61	74	5×5.8	E61	66	6.3×5.8	F61	82
				5×5.3	E55	46				6.3×5.3	F55	70			
				5×5.8	E61	48				6.3×5.8	F61	78			
100	5×5.8	E61	70	5×5.8	E61	70	6.3×5.8	F61	95	6.3×5.8	F61	112	6.3×7.7	F80	132
				6.3×5.3	F55	71							8×6.5	G68	146
				6.3×5.8	F61	99									
150	–	–	–	–	–	–	6.3×5.8	F61	117	8×6.5	G68	151	–	–	–
220	6.3×5.8	F61	121	6.3×5.8	F61	121	6.3×7.7	F80	156	6.3×7.7	F80	183	8×10	G10	320
							8×6.5	G68	173	8×6.5	G68	157	8×10.5	GA5	320
330	6.3×7.7	F80	163	6.3×7.7	F80	163	8×10	G10	296	8×10	G10	291	8×10.5	GA5	340
	8×6.5	G68	181	8×6.5	G68	181	8×10.5	GA5	296						
470	–	–	–	8×10	G10	320	8×10	G10	326	8×10	G10	348	10×10.5	HA5	490
				8×10.5	GA5	320	8×10.5	GA5	326	8×10.5	GA5	348			
680	–	–	–	8×10.5	GA5	340	10×10	H10	440	10×10	H10	484	–	–	–
							10×10.5	HA5	440						
820	–	–	–	–	–	–	–	–	–	10×10.5	HA5	484	–	–	–
1000	–	–	–	8×10.5	GA5	370	10×10.5	HA5	500	–	–	–	–	–	–
				10×10	H10	495									
				10×10.5	HA5	495									
1200	–	–	–	–	–	–	10×10.5	HA5	500	–	–	–	–	–	–
1500	–	–	–	10×10.5	HA5	550	–	–	–	–	–	–	–	–	–

Rated voltage(V) / Item / Rated capacitance(μF)	35			50		
	Case φD×L (mm)	Casing symbol	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Rated ripple current (mArms)
1	–	–	–	4×5.3	D55	10
				4×5.8	D61	12
2.2	–	–	–	4×5.3	D55	16
				4×5.8	D61	19
3.3	–	–	–	4×5.3	D55	16
				4×5.8	D61	22
4.7	4×5.8	D61	23	4×5.8	D61	26
				5×5.3	E55	23
				5×5.8	E61	29
6.8	–	–	–	5×5.3	E55	23
10	4×5.8	D61	30	5×5.8	E61	35
	5×5.3	E55	28	6.3×5.3	F55	35
	5×5.8	E61	39	6.3×5.8	F61	47
22	5×5.8	E61	52	6.3×5.8	F61	61
	6.3×5.3	F55	55			
33	6.3×5.8	F61	74	6.3×7.7	F80	82
				8×6.5	G68	91
47	6.3×5.8	F61	89	6.3×7.7	F80	97
				8×6.5	G68	108
68	6.3×7.7	F80	117	–	–	–
	8×6.5	G68	130			
100	6.3×7.7	F80	142	8×10.5	GA5	230
	8×6.5	G68	158			
	8×10	G10	283	10×10.5	HA5	262
	8×10.5	GA5	283			
150	8×10	G10	293	10×10.5	HA5	300
	8×10.5	GA5	293			
220	8×10.5	GA5	302	10×10.5	HA5	375
	10×10	H10	450			
330	10×10.5	HA5	450	–	–	–

(Note) Rated ripple current : 105° C, 120Hz

Chip Type, 105°C Use, Long Life Capacitors

GREEN CAP | SMD | 105°C 3000hours | Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 3000 hours at 105℃. (10L:5000 hours).

Long life

RVC ⇦ RVL

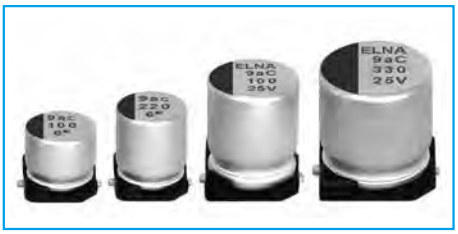

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF), V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	

Rated voltage (V)	6.3	10	16	25	35	50
tanδ (max.)	0.28	0.24	0.20	0.16	0.13	0.12

(20℃,120Hz)

Characteristics at high and low temperature

Rated voltage (V)		6.3	10	16	25	35	50
Impedance ratio (max.)	Z−25℃/Z+20℃	4	3	2	2	2	2
	Z−40℃/Z+20℃	10	7	5	3	3	3

(120Hz)

Endurance (105℃) (Applied ripple current)

Test time	3000 hours (10L : 5000 hours)
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±30% of initial value
Tangent of the loss angle	300% or less of initial specified value

Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

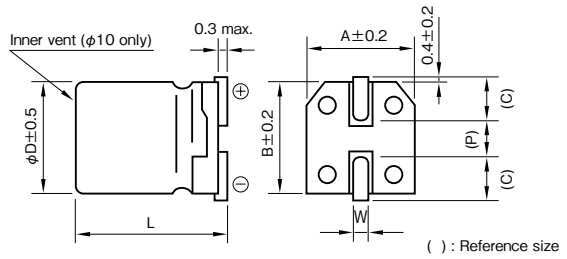

φD	L	A	B	C	W	P	Casing symbol
4	5.8±0.3	4.3	4.3	2.0	0.5 to 0.8	1.0	D61
5	5.8±0.3	5.3	5.3	2.3	0.5 to 0.8	1.5	E61
6.3	5.8±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	F61
6.3	7.7±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	F80
8	10.0±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	G10
10	10.0±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	H10

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)		50・60	120	1k	10k・100k
6.3 to 16		0.80	1	1.15	1.25
25 to 35		0.80	1	1.25	1.40
50	1 to 3.3μF	0.50	1	1.35	1.50
	4.7 or more	0.70	1	1.35	1.50

Part numbering system (example : 16V47μF)

RVC	—	16	V	470	M	F61	U —	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping symbol

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3			10			16			25			35			50		
	Case φD×L(mm)	Casing symbol	Rated ripple current (mArms)	Case φD×L(mm)	Casing symbol	Rated ripple current (mArms)	Case φD×L(mm)	Casing symbol	Rated ripple current (mArms)	Case φD×L(mm)	Casing symbol	Rated ripple current (mArms)	Case φD×L(mm)	Casing symbol	Rated ripple current (mArms)	Case φD×L(mm)	Casing symbol	Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4×5.8	D61	10
2.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4×5.8	D61	16
3.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4×5.8	D61	17
4.7	—	—	—	—	—	—	—	—	—	—	—	—	4×5.8	D61	16	5×5.8	E61	23
10	—	—	—	—	—	—	4×5.8	D61	28	—	—	—	5×5.8	E61	28	6.3×5.8	F61	35
22	4×5.8	D61	26	—	—	—	5×5.8	E61	39	—	—	—	6.3×5.8	F61	55	6.3×7.7	F80	58
33	—	—	—	5×5.8	E61	43	—	—	—	6.3×5.8	F61	60	6.3×7.7	F80	57	8×10	G10	91
47	5×5.8	E61	46	—	—	—	6.3×5.8	F61	70	6.3×7.7	F80	65	—	—	—	8×10	G10	100
100	6.3×5.8	F61	71	—	—	—	6.3×7.7	F80	81	8×10	G10	130	—	—	—	10×10	H10	160
220	6.3×7.7	F80	101	8×10	G10	160	—	—	—	—	—	—	10×10	H10	220	—	—	—
330	8×10	G10	230	—	—	—	—	—	—	10×10	H10	238	—	—	—	—	—	—
470	—	—	—	—	—	—	10×10	H10	340	—	—	—	—	—	—	—	—	—
1000	10×10	H10	313	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105℃, 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

RZH, RMH VERTICAL CHIP TYPE ALUMINUM ELECTROLYTIC CAPACITORS ELNA®

Chip Type 105°C Capacitors

GREEN CAP | SMD | 105°C 7000hours | Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guaranteed 7000 hours at 105°C.
  (φ6.3X5.8L: 5000 hours)

Long life

RZH ⇦ RVC

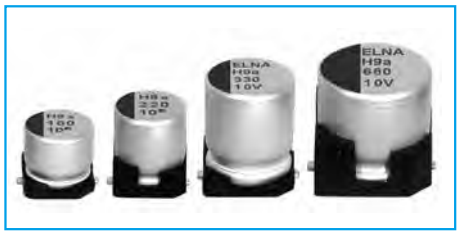

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 6.3, 10, 16, 25, 35 tanδ (max.): 0.32, 0.28, 0.26, 0.16, 0.14 (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 6.3, 10, 16, 25, 35 Impedance ratio (max.) Z−25℃/Z+20℃: 2, 2, 2, 2, 2 Impedance ratio (max.) Z−40℃/Z+20℃: 3, 3, 3, 3, 3 Impedance ratio (max.) Z−55℃/Z+20℃: 4, 4, 4, 4, 4 (120Hz)
Endurance (105℃) (Applied ripple current)	Test time: 7000 hours (φ6.3×5.8L:5000hours) Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 300% or less of the initial specified value
Shelf life (105℃)	Test time : 1000hours ; other items are the same as those for the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

Standard Type

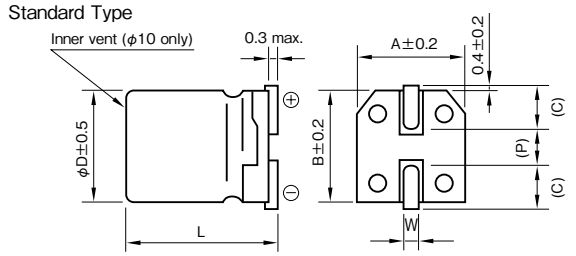

For Vibration Resistance Type

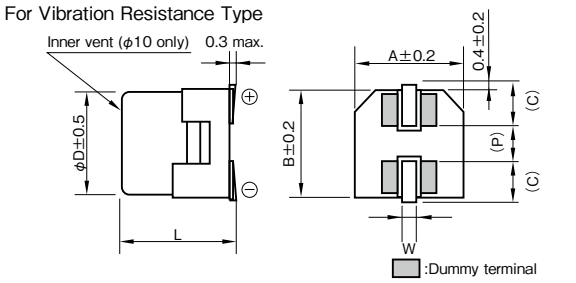

( ): Reference size

φD	L	A	B	C	W	P	Casing symbol
6.3	5.8±0.3	6.6	6.6	2.7	0.5~0.8	2.0	F61
6.3	7.7±0.3	6.6	6.6	2.7	0.5~0.8	2.0	F80
8	10±0.5	8.4	8.4	3.0	0.7~1.1	3.1	G10
10	10±0.5	10.4	10.4	3.3	0.7~1.1	4.7	H10

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	120	1k	10k	100k
6.3 to 35	0.50	0.8	0.95	1

Part numbering system

Standard Type (example : 35V100μF)

RZH	—	35	V	101	M	F80	U	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

For Vibration Resistance Type (example : 35V330μF)

RMH	—	35	V	331	M	H10	U	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage(V) / Item / Rated capacitance(μF)	6.3				10				16				25			
	Case φD×L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)
33	—	—	—	—	—	—	—	—	—	—	—	—	6.3×5.8	F61	1.10	140
47	—	—	—	—	—	—	—	—	6.3×5.8	F61	1.10	140	6.3×5.8	F61	1.10	140
100	6.3×5.8	F61	1.10	140	6.3×5.8	F61	1.10	140	6.3×5.8	F61	1.10	140	6.3×7.7	F80	1.00	230
150	6.3×5.8	F61	1.10	140	6.3×5.8	F61	1.10	140	6.3×5.8	F61	1.10	140	8×10	G10	0.22	600
220	6.3×7.7	F80	1.00	230	6.3×7.7	F80	1.00	230	6.3×7.7	F80	1.00	230	8×10	G10	0.22	600
330	6.3×7.7	F80	1.00	230	8×10	G10	0.22	600	8×10	G10	0.22	600	8×10	G10	0.22	600
470	8×10	G10	0.22	600	8×10	G10	0.22	600	8×10	G10	0.22	600	10×10	H10	0.16	850
									10×10	H10	0.16	850				
680	10×10	H10	0.16	850	10×10	H10	0.16	850	10×10	H10	0.16	850	—	—	—	—
1000	10×10	H10	0.16	850	—	—	—	—	—	—	—	—	—	—	—	—

Rated voltage(V) / Item / Rated capacitance(μF)	35			
	Case φD×L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)
22	6.3×5.8	F61	1.10	140
33	6.3×5.8	F61	1.10	140
	6.3×7.7	F80	1.00	230
47	6.3×7.7	F80	1.00	230
100	6.3×7.7	F80	1.00	230
150	8×10	G10	0.22	600
220	8×10	G10	0.22	600
330	10×10	H10	0.16	850

(Note) Rated ripple current : 105℃ , 100kHz ; ESR : 20℃ , 100kHz

Chip Type, 105°C Use, Low Impedance Capacitors

GREEN CAP | SMD | Low Z | 105℃ 2000hours | Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 2000 hours at 105℃.
  (φ8×6.5L or less : 1000hours)
  (φ12.5×13.5L : 5000hours)

Miniaturized Low impedance ⇦ Low impedance

RVZ ⇦ RVH ⇦ RVJ

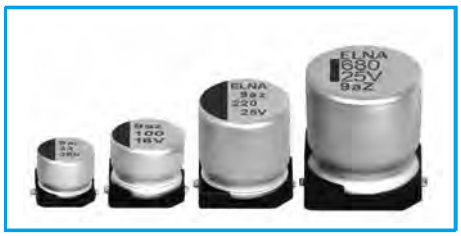

Marking color : Black print
There are also White print on a brown sleeve
(φ8×10L–φ12.5×13.5L)

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 6.3, 10, 16, 25, 35 tanδ (max.): 0.28, 0.24, 0.20, 0.16, 0.14 0.02 is added to every 1000μF increase over 1000μF. (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 6.3, 10, 16, 25, 35 Impedance ratio (max.) Z−25℃/Z+20℃: 4, 3, 2, 2, 2 Impedance ratio (max.) Z−55℃/Z+20℃: 8, 5, 4, 3, 3 (120Hz)
Endurance (105℃) (Applied ripple current)	Test time: 1000 hours (φ8×6.5L or less) 2000 hours (φ8×10L to φ10×10.5L) 5000 hours (φ12.5×13.5L) Leakage current: The initial specified value or less Percentage of capacitance change: Within ±25% of initial value Tangent of the loss angle: 200% or less of initial specified value
Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

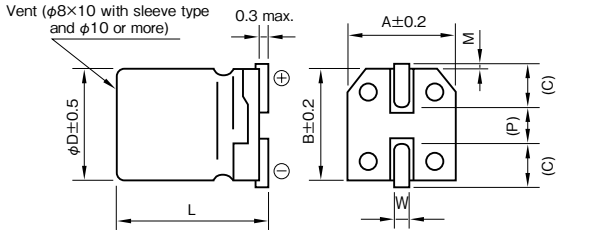

( ) : Reference size

φD	L	A	B	C	M	W	P	Casing symbol
4	5.3±0.2	4.3	4.3	2.0	0.4±0.2	0.5 to 0.8	1.0	D55
4	5.8±0.3	4.3	4.3	2.0	0.4±0.2	0.5 to 0.8	1.0	D61
5	5.3±0.2	5.3	5.3	2.3	0.4±0.2	0.5 to 0.8	1.5	E55
5	5.8±0.3	5.3	5.3	2.3	0.4±0.2	0.5 to 0.8	1.5	E61
6.3	5.3±0.2	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	F55
6.3	5.8±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	F61
6.3	7.7±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	F80
8	6.5±0.3	8.4	8.4	3.4	0.4±0.2	0.5 to 0.8	2.3	G68
8	10.0±0.5	8.4	8.4	3.0	0.4±0.2	0.7 to 1.1	3.1	G10
8	10.5±0.5	8.4	8.4	3.0	0.4±0.2	0.7 to 1.1	3.1	GA5
10	10.0±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	H10
10	10.5±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	HA5
12.5	13.5±0.5	13.0	13.0	4.9	0.7±0.3	1.0 to 1.4	4.6	IE

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	120	1k	10k	100k
6.3 to 35	0.50	0.75	0.90	1

Part numbering system

φ8×6.5 and φ6.3 or less (example : 6.3V330μF)

RVZ	—	6	V	331	M	G68	U	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

φ8×10, φ8×10.5 (example : 10V220μF)

RVZ	—	10	V	221	M	G10	Y1U	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

φ10×10, φ10×10.5 (example : 16V330μF)

RVZ	—	16	V	331	M	H10	EU	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

φ12.5×13.5 (example : 25V680μF)

RVZ	—	25	V	681	M	IE	ET	—	R5
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

* In the case of "for High Temperature Reflow" type, a series name is "RZA".
* Please inquire sleeve type P/N.
* If "For Vibration Resistance" type is required, please see the series RTZ of page 92.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3				10				16				25				35			
	Case φD×L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)
4.7	—	—	—	—	—	—	—	—	—	—	—	—	4×5.3	D55	3.20	65	4×5.3	D55	3.20	65
10	—	—	—	—	4×5.3	D55	3.20	65	4×5.3	D55	3.20	65	4×5.8	D61	1.80	80	5×5.3	E55	1.50	110
													5×5.3	E55	1.50	110	5×5.8	E61	0.76	150
15	—	—	—	—	—	—	—	—	4×5.8	D61	1.80	80	5×5.8	E61	0.76	150	5×5.8	E61	0.76	150
22	4×5.3	D55	3.20	65	4×5.8	D61	1.80	80	5×5.3	E55	1.50	110	5×5.8	E61	0.76	150	5×5.8	E61	0.76	150
	4×5.8	D61	1.80	80	5×5.3	E55	1.50	110	5×5.8	E61	0.76	150	6.3×5.3	F55	0.85	170	6.3×5.3	F55	0.85	170
33	5×5.3	E55	1.50	110	5×5.3	E55	1.50	110	6.3×5.3	F55	0.85	170	6.3×5.3	F55	0.85	170	6.3×5.3	F55	0.85	170
	5×5.8	E61	0.76	150	5×5.8	E61	0.76	150	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230
47	5×5.3	E55	1.50	110	6.3×5.3	F55	0.85	170	6.3×5.3	F55	0.85	170	6.3×5.3	F55	0.85	170	6.3×5.8	F61	0.44	230
																	6.3×7.7	F80	0.34	280
	5×5.8	E61	0.76	150	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	8×6.5	G68	0.34	280
68	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×7.7	F80	0.34	280
																	8×6.5	G68	0.34	280
100	6.3×5.3	F55	0.85	170	6.3×5.3	F55	0.85	170	6.3×5.3	F55	0.85	170	6.3×7.7	F80	0.34	280	8×10	G10	0.20	450
									6.3×5.8	F61	0.44	230								
	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	8×6.5	G68	0.34	280	8×6.5	G68	0.34	280	8×10.5	GA5	0.17	450
150	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×7.7	F80	0.34	280	8×10	G10	0.20	450	8×10.5	GA5	0.17	450
									8×6.5	G68	0.34	280	8×10.5	GA5	0.17	450	10×10	H10	0.10	670
220	6.3×5.8	F61	0.44	230	6.3×7.7	F80	0.34	280	6.3×7.7	F80	0.34	280	8×10.5	GA5	0.17	450	8×10.5	GA5	0.17	450
					8×6.5	G68	0.34	280												
	6.3×7.7	F80	0.34	280	8×10	G10	0.20	450	8×10	G10	0.20	450	10×10	H10	0.10	670	10×10	H10	0.10	670
330	6.3×7.7	F80	0.34	280	8×10.5	GA5	0.17	450	8×10.5	GA5	0.17	450	8×10.5	GA5	0.17	450	10×10.5	HA5	0.09	670
	8×6.5	G68	0.34	280																
	8×10	G10	0.20	450	10×10	H10	0.10	670	10×10	H10	0.10	670	10×10	H10	0.10	670				
470	8×10.5	GA5	0.17	450	8×10.5	GA5	0.17	450	8×10.5	GA5	0.17	450	10×10.5	HA5	0.09	670	12.5×13.5	IE	0.06	1100
	10×10	H10	0.10	670	10×10	H10	0.10	670	10×10	H10	0.10	670								
680	8×10.5	GA5	0.17	450	10×10.5	HA5	0.09	670	10×10.5	HA5	0.09	670	12.5×13.5	IE	0.06	1100	12.5×13.5	IE	0.06	1100
1000	8×10.5	GA5	0.17	450	10×10.5	HA5	0.09	670	12.5×13.5	IE	0.06	1100	12.5×13.5	IE	0.06	1100	—	—	—	—
	10×10	H10	0.10	670																
1500	10×10.5	HA5	0.09	670	12.5×13.5	IE	0.06	1100	12.5×13.5	IE	0.06	1100	—	—	—	—	—	—	—	—
2200	12.5×13.5	IE	0.06	1100	12.5×13.5	IE	0.06	1100	—	—	—	—	—	—	—	—	—	—	—	—
2700	12.5×13.5	IE	0.06	1100	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105℃, 100kHz ; Impedance : 20℃, 100kHz

Chip Type, 105°C Use, Low Impedance, Long Life Capacitors

GREEN CAP | SMD | Low Z | 105°C 2000hours | Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 2000 hours at 105℃.
  (6.3 to 50V 10.0L,10.5L:5000 hours)
  (φ12.5x13.5L: 5000 hours)

Low Z, Long life

RVD ⇦ RVZ

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 6.3, 10, 16, 25, 35, 50, 63, 80, 100 tanδ (max.): 0.26, 0.19, 0.16, 0.14, 0.12, 0.10, 0.08, 0.08, 0.07 0.02 is added to every 1000μF increase over 1000μF. (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 6.3, 10, 16, 25, 35, 50, 63, 80, 100 Impedance ratio (max.) Z−25℃/Z+20℃: 2, 2, 2, 2, 2, 2, 2, 2, 2 Impedance ratio (max.) Z−40℃/Z+20℃: 3, 3, 3, 3, 3, 3, 3, 3, 3 Impedance ratio (max.) Z−55℃/Z+20℃: 8, 4, 4, 3, 3, 3, 3, 3, 3 (120Hz)
Endurance (105℃) (Applied ripple current)	Test time: 2000 hours (6.3 to 50V 10.0L,10.5L,φ12.5x13.5L : 5000 hours) Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 200% or less of the initial specified value (6.3 to 50V 10.0L,10.5L,φ12.5x13.5L : 300% or less)
Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

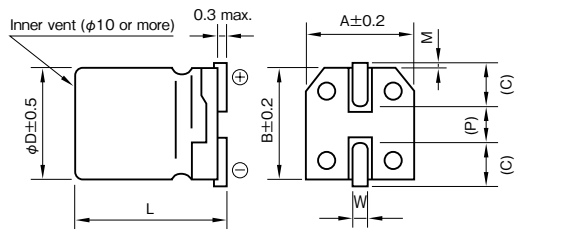

( ): Reference size

φD	L	A	B	C	M	W	P	Casing symbol
4	5.8±0.3	4.3	4.3	2.0	0.4±0.2	0.5 to 0.8	1.0	D61
5	5.8±0.3	5.3	5.3	2.3	0.4±0.2	0.5 to 0.8	1.5	E61
6.3	5.8±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	F61
6.3	7.7±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	F80
8	6.5±0.3	8.4	8.4	3.4	0.4±0.2	0.5 to 0.8	2.3	G68
8	10±0.5	8.4	8.4	3.0	0.4±0.2	0.7 to 1.1	3.1	G10
8	10.5±0.5	8.4	8.4	3.0	0.4±0.2	0.7 to 1.1	3.1	GA5
10	10±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	H10
10	10.5±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	HA5
12.5	13.5±0.5	13.0	13.0	4.9	0.7±0.3	1.0 to 1.4	4.6	IE

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping spesifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50・60	120	1k	10k・100k
6.3 to 100	0.50	0.50	0.75	1

Part numbering system

φ10X10.5L or less (example : 16V100μF)

RVD	—	16	V	101	M	F61	U	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

In the case of "for High Temperature Reflow" type, a series name is "RZB".

φ12.5X13.5 (example : 16V1000μF)

RVD	—	16	V	102	M	IE	T	—	R5
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

If "For Vibration Resistance" type is required, please see the series RTD of page 94.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3				10				16			
	Case φD×L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)
10	—	—	—	—	—	—	—	—	4×5.8	D61	1.35	90
22	4×5.8	D61	1.35	90	4×5.8	D61	1.35	90	4×5.8	D61	1.35	90
									5×5.8	E61	0.70	170
33	—	—	—	—	4×5.8	D61	1.35	90	—	—	—	—
					5×5.8	E61	0.70	170				
47	4×5.8	D61	1.35	90	—	—	—	—	5×5.8	E61	0.70	170
	5×5.8	E61	0.70	170					6.3×5.8	F61	0.36	250
100	5×5.8	E61	0.70	170	—	—	—	—	6.3×5.8	F61	0.36	250
	6.3×5.8	F61	0.36	250								
220	6.3×5.8	F61	0.36	250	6.3×7.7	F80	0.30	300	6.3×7.7	F80	0.30	300
					8×6.5	G68	0.30	300	8×6.5	G68	0.30	300
330	6.3×7.7	F80	0.30	300	8×10	G10	0.16	600	8×10	G10	0.16	600
	8×6.5	G68	0.30	300								
470	8×10	G10	0.16	600	8×10	G10	0.16	600	8×10	G10	0.16	600
680	—	—	—	—	8×10	G10	0.16	600	10×10	H10	0.090	850
									10×10.5	HA5	0.080	850
1000	8×10	G10	0.16	600	10×10	H10	0.090	850	12.5×13.5	IE	0.054	1160
					10×10.5	HA5	0.080	850				
1500	10×10	H10	0.090	850	12.5×13.5	IE	0.054	1160	12.5×13.5	IE	0.054	1160
	10×10.5	HA5	0.080	850								
2200	12.5×13.5	IE	0.054	1160	12.5×13.5	IE	0.054	1160	—	—	—	—

Rated voltage (V) / Item / Rated capacitance (μF)	25				35				50			
	Case φD×L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)
4.7	—	—	—	—	4×5.8	D61	1.35	90	4×5.8	D61	2.7	60
10	4×5.8	D61	1.35	90	4×5.8	D61	1.35	90	5×5.8	E61	1.5	90
					5×5.8	E61	0.70	170	6.3×5.8	F61	0.86	170
22	5×5.8	E61	0.70	170	5×5.8	E61	0.70	170	6.3×5.8	F61	0.86	170
33	5×5.8	E61	0.70	170	6.3×5.8	F61	0.36	250	6.3×7.7	F80	0.66	195
	6.3×5.8	F61	0.36	250					8×6.5	G68	0.63	200
47	6.3×5.8	F61	0.36	250	6.3×5.8	F61	0.36	250	6.3×7.7	F80	0.66	195
									8×6.5	G68	0.63	200
100	6.3×7.7	F80	0.30	300	6.3×7.7	F80	0.30	300	8×10	G10	0.34	350
	8×6.5	G68	0.30	300	8×10	G10	0.16	600	8×10.5	GA5	0.32	350
220	8×10	G10	0.16	600	8×10	G10	0.16	600	10×10	H10	0.20	700
									10×10.5	HA5	0.18	700
330	8×10	G10	0.16	600	10×10	H10	0.090	850	12.5×13.5	IE	0.12	900
					10×10.5	HA5	0.080	850				
470	10×10	H10	0.090	850	12.5×13.5	IE	0.054	1160	—	—	—	—
	10×10.5	HA5	0.080	850								
680	12.5×13.5	IE	0.054	1160	12.5×13.5	IE	0.054	1160	—	—	—	—
1000	12.5×13.5	IE	0.054	1160	—	—	—	—	—	—	—	—

Rated voltage (V) / Item / Rated capacitance (μF)	63				80				100			
	Case φD×L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)
4.7	5×5.8	E61	3.0	50	—	—	—	—	—	—	—	—
10	6.3×5.8	F61	1.5	80	6.3×7.7	F80	2.4	60	—	—	—	—
22	6.3×7.7	F80	1.2	120	8×10	G10	0.90	130	8×10	G10	1.30	130
33	8×10	G10	0.65	250	8×10	G10	0.90	130	10×10	H10	0.70	200
47	8×10	G10	0.65	250	10×10	H10	0.50	200	—	—	—	—
68	8×10	G10	0.65	250	—	—	—	—	—	—	—	—
100	10×10	H10	0.35	400	12.5×13.5	IE	0.18	550	—	—	—	—
	12.5×13.5	IE	0.16	600								
220	12.5×13.5	IE	0.16	600	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105℃, 100kHz
Impedance : 20℃, 100kHz

RVV, RTV VERTICAL CHIP TYPE ALUMINUM ELECTROLYTIC CAPACITORS ELNA®

Chip Type, 105˚C Use,Low Impedance Capacitors

GREEN CAP | SMD | Low Z | 105˚C 2000hours | Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 2000 hours at 105℃.

Low impedance

RVV ⇦ RVD

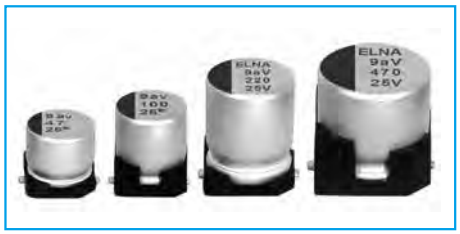

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 6.3, 10, 16, 25, 35, 50 tanδ (max.): 0.26, 0.19, 0.16, 0.14, 0.12, 0.10 (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 6.3, 10, 16, 25, 35, 50 Impedance ratio (max.) Z−25℃/Z+20℃: 2, 2, 2, 2, 2, 2 Z−40℃/Z+20℃: 3, 3, 3, 3, 3, 3 Z−55℃/Z+20℃: 4, 4, 4, 3, 3, 3 (120Hz)
Endurance (105℃) (Applied ripple current)	Test time: 2000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 200% or less of initial specified value
Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

Standard Type

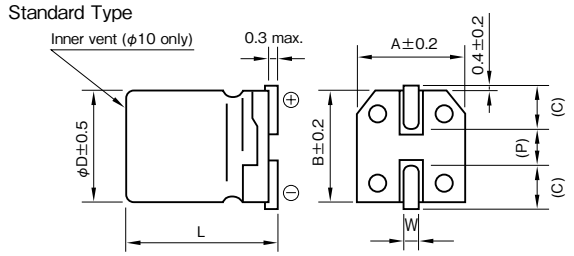

For Vibration Resistance Type (except ϕ8×6.5)

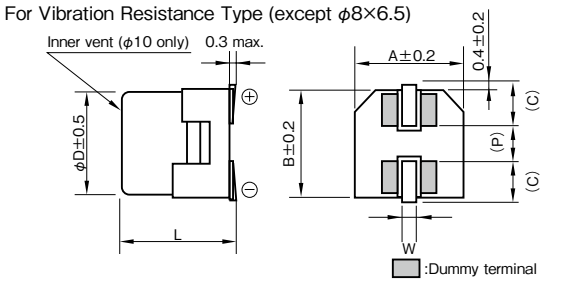

( ): Reference size

ϕD	L	A	B	C	W	P	Casing symbol
6.3	5.8±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	F61
6.3	7.7±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	F80
8	6.5±0.3	8.4	8.4	3.4	0.5 to 0.8	2.3	G68
8	10±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	G10
10	10±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	H10

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping spesifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50・60	120	1k	10k・100k
6.3 to 50	0.50	0.50	0.75	1

Part numbering system

Standard Type (example : 16V100μF)

RVV	—	16	V	101	M	F61	U	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

For Vibration Resistance Type (example : 25V470μF)

RTV	—	25	V	471	M	H10	U	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3				10				16			
	Case φD × L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)
47	—	—	—	—	—	—	—	—	6.3 × 5.8	F61	0.26	300
100	6.3 × 5.8	F61	0.26	300	—	—	—	—	6.3 × 5.8	F61	0.26	300
									6.3 × 7.7	F80	0.16	600
220	6.3 × 5.8	F61	0.26	300	6.3 × 7.7	F80	0.16	600	6.3 × 7.7	F80	0.16	600
					8 × 6.5	G68	0.18	500	8 × 6.5	G68	0.18	500
330	6.3 × 7.7	F80	0.16	600	8 × 10	G10	0.09	850	8 × 10	G10	0.09	850
	8 × 6.5	G68	0.18	500								
470	8 × 10	G10	0.09	850	8 × 10	G10	0.09	850	8 × 10	G10	0.09	850
680	—	—	—	—	8 × 10	G10	0.09	850	10 × 10	H10	0.07	1190
1000	8 × 10	G10	0.09	850	10 × 10	H10	0.07	1190	—	—	—	—
1500	10 × 10	H10	0.07	1190	—	—	—	—	—	—	—	—

Rated voltage (V) / Item / Rated capacitance (μF)	25				35				50			
	Case φD × L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	Impedance (Ω max.)	Rated ripple current (mArms)
33	6.3 × 5.8	F61	0.26	300	6.3 × 5.8	F61	0.26	300	—	—	—	—
47	6.3 × 5.8	F61	0.26	300	6.3 × 5.8	F61	0.26	300	—	—	—	—
100	6.3 × 7.7	F80	0.16	600	6.3 × 7.7	F80	0.16	600	8 × 10	G10	0.18	670
	8 × 6.5	G68	0.18	500	8 × 10	G10	0.09	850				
220	8 × 10	G10	0.09	850	8 × 10	G10	0.09	850	10 × 10	H10	0.12	900
330	8 × 10	G10	0.09	850	10 × 10	H10	0.07	1190	—	—	—	—
470	10 × 10	H10	0.07	1190	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105℃ , 100kHz
Impedance : 20℃ , 100kHz

RZD, RMD VERTICAL CHIP TYPE ALUMINUM ELECTROLYTIC CAPACITORS ELNA®

Chip Type, 105˚C Use, Low ESR, High CV Capacitors

GREEN CAP | SMD | Low ESR | 105˚C 2000hours | Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guaranteed 2000 hours at 105°C.

High CV

RZD ⇦ RVV

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 6.3, 10, 16, 25, 35, 50, 63, 80 tanδ (max.): 0.26, 0.19, 0.16, 0.14, 0.12, 0.10, 0.08, 0.08 0.02 is added to every 1000μF increase over 1000μF. (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 6.3, 10, 16, 25, 35, 50, 63, 80 Impedance ratio (max.) Z−25℃/Z+20℃: 2, 2, 2, 2, 2, 2, 2, 2 Impedance ratio (max.) Z−40℃/Z+20℃: 3, 3, 3, 3, 3, 3, 3, 3 Impedance ratio (max.) Z−55℃/Z+20℃: 4, 4, 4, 3, 3, 3, 3, 3 (120Hz)
Endurance (105℃) (Applied ripple current)	Test time: 2000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 200% or less of the initial specified value
Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

Standard Type

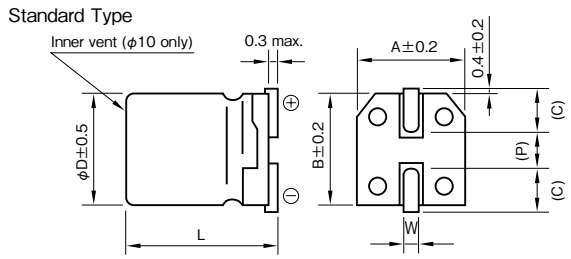

For Vibration Resistance Type

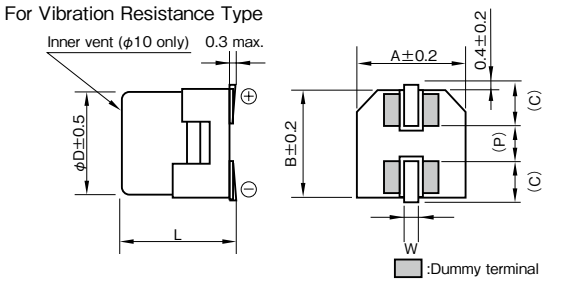

( ): Reference size

ϕD	L	A	B	C	W	P	Casing symbol
6.3	5.8±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	F61
6.3	7.7±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	F80
8	10±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	G10
10	10±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	H10

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping spesifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50・60	120	1k	10k・100k
6.3 to 80	0.50	0.50	0.75	1

Part numbering system

Standard Type (example : 35V150μF)

RZD	—	35	V	151	M	F80	U	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

For Vibration Resistance Type (example : 25V820μF)

RMD	—	25	V	821	M	H10	U	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3				10				16			
	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)
150	—	—	—	—	—	—	—	—	6.3 × 5.8	F61	0.26	300
220	—	—	—	—	6.3 × 5.8	F61	0.26	300	6.3 × 5.8	F61	0.26	300
330	6.3 × 5.8	F61	0.26	300	6.3 × 7.7	F80	0.16	600	6.3 × 7.7	F80	0.16	600
470	6.3 × 7.7	F80	0.16	600	6.3 × 7.7	F80	0.16	600	—	—	—	—
680	6.3 × 7.7	F80	0.16	600	—	—	—	—	8 × 10	G10	0.08	850
1000	—	—	—	—	8 × 10	G10	0.08	850	10 × 10	H10	0.06	1190
1500	8 × 10	G10	0.08	850	10 × 10	H10	0.06	1190	—	—	—	—
2200	10 × 10	H10	0.06	1190	—	—	—	—	—	—	—	—

Rated voltage (V) / Item / Rated capacitance (μF)	25				35				50			
	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)
47	—	—	—	—	—	—	—	—	6.3 × 5.8	F61	0.68	195
100	—	—	—	—	6.3 × 5.8	F61	0.26	300	6.3 × 7.7	F80	0.34	350
150	6.3 × 5.8	F61	0.26	300	6.3 × 7.7	F80	0.16	600	—	—	—	—
220	6.3 × 7.7	F80	0.16	600	—	—	—	—	8 × 10	G10	0.18	670
330	—	—	—	—	8 × 10	G10	0.08	850	10 × 10	H10	0.12	900
470	8 × 10	G10	0.08	850	—	—	—	—	—	—	—	—
560	—	—	—	—	10 × 10	H10	0.06	1190	—	—	—	—
820	10 × 10	H10	0.06	1190	—	—	—	—	—	—	—	—

Rated voltage (V) / Item / Rated capacitance (μF)	63				80			
	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)
22	6.3 × 7.7	F80	0.85	85	—	—	—	—
33	6.3 × 7.7	F80	0.85	145	—	—	—	—
47	8 × 10	G10	0.45	300	8 × 10	G10	0.68	150
68	8 × 10	G10	0.45	300	10 × 10	H10	0.45	215
100	8 × 10	G10	0.45	300	—	—	—	—
150	10 × 10	H10	0.30	430	—	—	—	—

(Note) Rated ripple current : 105℃ , 100kHz
ESR : 20℃ , 100kHz

Chip Type, 125°C Use, Low ESR, Long Life Capacitors

GREEN CAP | SMD | Low ESR | 125°C 2000hours | Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 2000 hours at 125℃.
  (φ4 to φ8x6.5L : 1000 hours)
  (φ12.5x13.5L : 5000 hours)

Low ESR, Long Life

RVT ⇦ RVK

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +125
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	

Rated voltage (V)	10	16	25	35	50	63	80	100
tanδ (max.)	0.24	0.20	0.16	0.14	0.14	0.12	0.12	0.10

(20℃,120Hz)

Characteristics at high and low temperature

Rated voltage (V)		10	16	25	35	50	63	80	100
Impedance Ratio (max.)	Z−25℃/Z+20℃	3	2	2	2	2	2	2	2
	Z−40℃/Z+20℃	4	3	3	3	3	3	3	3

(120Hz)

Endurance (125℃) (Applied ripple current)

Test time	2000 hours(φ4 to φ8×6.5L : 1000 hours,φ12.5x13.5L : 5000 hours)
Leakage current	The initial specified value or less
Capacitance change	Within ±30% of initial value
Tangent of loss angle	300% or less of the initial specified value

Item	Performance
Shelf life (125℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

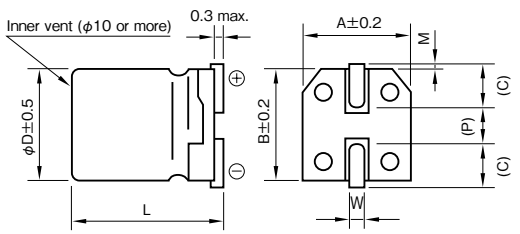

( ): Reference size

φD	L	A	B	C	M	W	P	Casing symbol
4	5.8±0.3	4.3	4.3	2.0	0.4±0.2	0.5 to 0.8	1.0	D61
5	5.8±0.3	5.3	5.3	2.3	0.4±0.2	0.5 to 0.8	1.5	E61
6.3	5.8±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	F61
6.3	7.7±0.3	6.6	6.6	2.7	0.4±0.2	0.5 to 0.8	2.0	F80
8	6.5±0.3	8.4	8.4	3.4	0.4±0.2	0.5 to 0.8	2.3	G68
8	10±0.5	8.4	8.4	3.0	0.4±0.2	0.7 to 1.1	3.1	G10
10	10±0.5	10.4	10.4	3.3	0.4±0.2	0.7 to 1.1	4.7	H10
12.5	13.5±0.5	13.0	13.0	4.9	0.7±0.3	1.0 to 1.4	4.6	IE

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping spesifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage(V) \ Frequency (Hz)	120	1k	10k	100k
10 to 100	0.77	0.88	0.96	1.00

Part numbering system

φ10X10L or less (example : 16V100μF)

RVT	—	35	V	221	M	H10	U	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

In the case of "for High Temperature Reflow" type, a series name is "RZC".

φ12.5X13.5 (example : 35V330μF)

RVT	—	35	V	331	M	IE	T	—	R5
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

If "For Vibration Resistance" type is required, please see the series RTT of page 96.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage(V) / Item / Rated capacitance(μF)	10				16				25			
	Case φD×L(mm)	ESR(Ω max.) 20℃	ESR(Ω max.) −40℃	Rated ripple current (mArms)	Case φD×L(mm)	ESR(Ω max.) 20℃	ESR(Ω max.) −40℃	Rated ripple current (mArms)	Case φD×L(mm)	ESR(Ω max.) 20℃	ESR(Ω max.) −40℃	Rated ripple current (mArms)
10	—	—	—	—	4×5.8	3.0	45	50	5×5.8	1.5	23	81
22	4×5.8	3.0	45	50	5×5.8	1.5	23	81	6.3×5.8	1.0	15	114
33	5×5.8	1.5	23	81	6.3×5.8	1.0	15	114	6.3×5.8	1.0	15	114
47	—	—	—	—	6.3×5.8	1.0	15	114	6.3×7.7	0.60	9.0	165
									8×6.5	0.60	9.0	180
100	—	—	—	—	—	—	—	—	6.3×7.7	0.60	9.0	165
									8×6.5	0.60	9.0	180
									8×10	0.20	2.0	340
220	6.3×7.7	0.60	9.0	165	8×10	0.20	2.0	340	8×10	0.20	2.0	340
	8×6.5	0.60	9.0	180	10×10	0.15	1.5	500	10×10	0.15	1.5	500
330	8×10	0.20	2.0	340	10×10	0.15	1.5	500	10×10	0.15	1.5	500
	10×10	0.15	1.5	500					12.5×13.5	0.086	1.29	750
470	10×10	0.15	1.5	500	12.5×13.5	0.086	1.29	750	12.5×13.5	0.086	1.29	750
680	12.5×13.5	0.086	1.29	750	12.5×13.5	0.086	1.29	750	—	—	—	—
1000	12.5×13.5	0.086	1.29	750	—	—	—	—	—	—	—	—

Rated voltage(V) / Item / Rated capacitance(μF)	35				50				63			
	Case φD×L(mm)	ESR(Ω max.) 20℃	ESR(Ω max.) −40℃	Rated ripple current (mArms)	Case φD×L(mm)	ESR(Ω max.) 20℃	ESR(Ω max.) −40℃	Rated ripple current (mArms)	Case φD×L(mm)	ESR(Ω max.) 20℃	ESR(Ω max.) −40℃	Rated ripple current (mArms)
4.7	4×5.8	3.0	45	50	—	—	—	—	—	—	—	—
10	5×5.8	1.5	23	81	6.3×5.8	3.2	48	58	6.3×7.7	1.8	36	95
	6.3×5.8	1.0	15	114								
22	6.3×5.8	1.0	15	114	6.3×7.7	1.2	18	95	8×10	0.70	14	140
33	6.3×7.7	0.60	9.0	165	6.3×7.7	1.2	18	95	8×10	0.70	14	140
	8×6.5	0.60	9.0	180	8×10	0.50	7.5	180	10×10	0.50	10	200
47	6.3×7.7	0.60	9.0	165	8×10	0.50	7.5	180	8×10	0.70	14	140
	8×6.5	0.60	9.0	180								
	8×10	0.20	2.0	340	10×10	0.30	4.5	280	10×10	0.50	10	200
100	8×10	0.20	2.0	340	10×10	0.30	4.5	280	12.5×13.5	0.25	3.75	400
	10×10	0.15	1.5	500	12.5×13.5	0.18	2.7	550				
220	10×10	0.15	1.5	500	12.5×13.5	0.18	2.7	550	—	—	—	—
330	12.5×13.5	0.086	1.29	750	—	—	—	—	—	—	—	—

Rated voltage(V) / Item / Rated capacitance(μF)	80				100			
	Case φD×L(mm)	ESR(Ω max.) 20℃	ESR(Ω max.) −40℃	Rated ripple current (mArms)	Case φD×L(mm)	ESR(Ω max.) 20℃	ESR(Ω max.) −40℃	Rated ripple current (mArms)
10	8×10	0.75	15	110	8×10	0.75	15	110
22	8×10	0.75	15	110	8×10	0.75	15	110
	10×10	0.55	11	150	10×10	0.55	11	150
33	8×10	0.75	15	110	10×10	0.55	11	150
	10×10	0.55	11	150				
47	—	—	—	—	12.5×13.5	0.32	4.8	300

(Note) Rated ripple current : 125℃, 100kHz
ESR : 100kHz

RZJ, RMJ VERTICAL CHIP TYPE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Chip Type, 125°C Use, Low ESR, Long Life Capacitors

GREEN CAP | SMD | Low ESR | 125°C 3000hours | Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guaranteed 3000 hours at 125°C. (φ6.3 : 2000 hours)
- Specify ESR after endurance test.

Low ESR, Long Life

RZJ ⇦ RVT

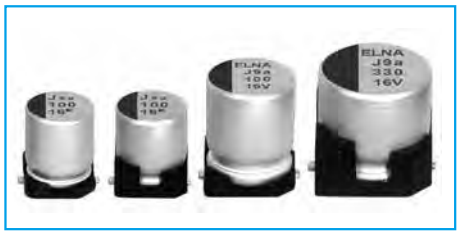

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +125
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 10, 16, 25, 35 tanδ (max.): 0.30, 0.23, 0.18, 0.16 (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 10, 16, 25, 35 Impedance ratio (max.) Z−25℃/Z+20℃: 3, 2, 2, 2 Impedance ratio (max.) Z−40℃/Z+20℃: 4, 3, 3, 3 (120Hz)
Endurance (125℃) (Applied ripple current)	Test time: 3000 hours (φ6.3 : 2000 hours) Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 300% or less of the initial specified value
Shelf life (125℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

Standard Type

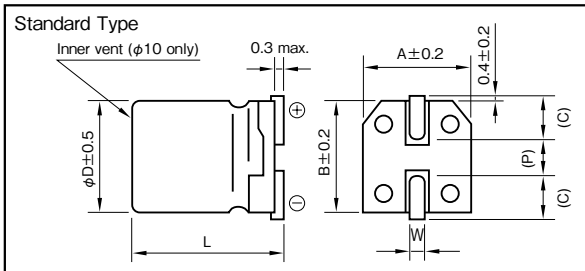

For Vibration Resistance Type

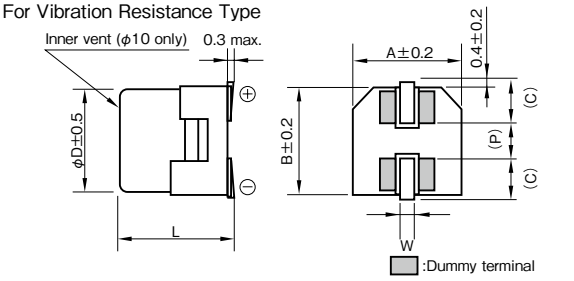

( ): Reference size

φD	L	A	B	C	W	P	Casing symbol
6.3	7.7±0.3	6.6	6.6	2.7	0.5~0.8	2.0	F80
8	10±0.5	8.4	8.4	3.0	0.7~1.1	3.1	G10
10	10±0.5	10.4	10.4	3.3	0.7~1.1	4.7	H10

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	120	1k	10k	100k
10 to 35	0.77	0.88	0.96	1

Part numbering system

Standard Type (example : 35V220μF)

RZJ	—	35	V	221	M	H10	U	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

For Vibration Resistance Type (example : 35V220μF)

RMJ	—	35	V	221	M	H10	U	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltag (V) / Item / Rated capacitance (μF)	10						16						25					
	Case φD×L (mm)	Initial ESR (Ω max.)		After endurance test ESR (Ω max.)		Rated ripple current (mArms)	Case φD×L (mm)	Initial ESR (Ω max.)		After endurance test ESR (Ω max.)		Rated ripple current (mArms)	Case φD×L (mm)	Initial ESR (Ω max.)		After endurance test ESR (Ω max.)		Rated ripple current (mArms)
		20℃	−40℃	20℃	−40℃			20℃	−40℃	20℃	−40℃			20℃	−40℃	20℃	−40℃	
100	—	—	—	—	—	—	6.3×7.7	0.45	5.0	3.5	40	220	8×10	0.15	3.0	0.60	4.5	350
							8×10	0.15	3.0	0.60	4.5	350						
220	8×10	0.15	3.0	0.60	4.5	350	8×10	0.15	3.0	0.60	4.5	350	10×10	0.12	2.0	0.40	3.5	550
330	8×10	0.15	3.0	0.60	4.5	350	10×10	0.12	2.0	0.40	3.5	550	10×10	0.12	2.0	0.40	3.5	550
	10×10	0.12	2.0	0.40	3.5	550												
470	10×10	0.12	2.0	0.40	3.5	550	10×10	0.12	2.0	0.40	3.5	550	—	—	—	—	—	—

Rated voltag (V) / Item / Rated capacitance (μF)	35					
	Case φD×L (mm)	Initial ESR (Ω max.)		After endurance test ESR (Ω max.)		Rated ripple current (mArms)
		20℃	−40℃	20℃	−40℃	
47	6.3×7.7	0.45	5.0	3.5	40	220
	8×10	0.15	3.0	0.60	4.5	350
100	8×10	0.15	3.0	0.60	4.5	350
220	10×10	0.12	2.0	0.40	3.5	550

(Note) After endurance test : 2000 hours
Rated ripple current : 125℃ , 100kHz, ESR : 100kHz

RZF, RMF VERTICAL CHIP TYPE ALUMINUM ELECTROLYTIC CAPACITORS ELNA®

Chip Type, 125°C Use, High CV, Long Life Capacitors

GREEN CAP | SMD | Low ESR | 125°C 4000hours | Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guaranteed 4000 hours at 125°C.
  (φ6.3 : 2000 hours)

High CV, Long Life

RZF ⇦ RVT

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +125
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 10, 16, 25, 35, 50, 63, 80 tanδ (max.): 0.24, 0.20, 0.16, 0.14, 0.14, 0.12, 0.12 (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 10, 16, 25, 35, 50, 63, 80 Impedance ratio (max.) Z−25℃/Z+20℃: 3, 2, 2, 2, 2, 2, 2 Impedance ratio (max.) Z−40℃/Z+20℃: 6, 4, 4, 3, 3, 3, 3 (120Hz)
Endurance (125℃) (Applied ripple current)	Test time: 4000 hours (φ6.3: 2000 hours) Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 300% or less of the initial specified value
Shelf life (125℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

Standard Type

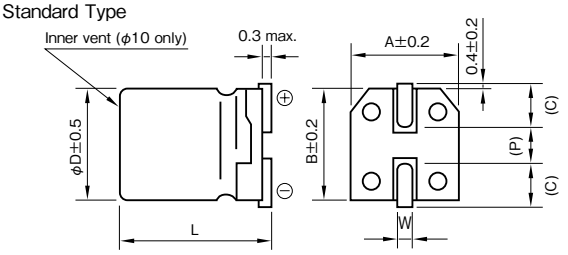

For Vibration Resistance Type

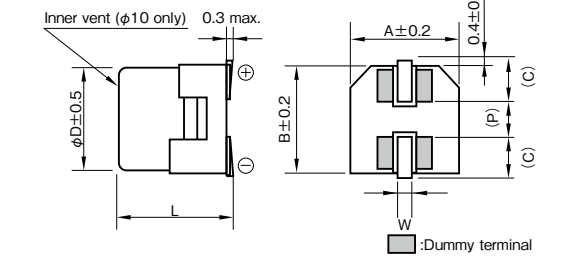

( ): Reference size

φD	L	A	B	C	W	P	Casing symbol
6.3	5.8±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	F61
6.3	7.7±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	F80
8	10±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	G10
10	10±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	H10

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping spesifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage(V) \ Frequency (Hz)	120	1k	10k	100k
10 to 80	0.77	0.88	0.96	1

Part numbering system

Standard Type (example : 35V100μF)

RZF	—	35	V	101	M	F80	U	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

For Vibration Resistance Type (example : 25V330μF)

RMF	—	25	V	331	M	H10	U	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	10				16				25			
	Case	ESR (Ω max.)		Rated ripple current	Case	ESR (Ω max.)		Rated ripple current	Case	ESR (Ω max.)		Rated ripple current
	φD × L (mm)	20℃	-40℃	(mArms)	φD × L (mm)	20℃	-40℃	(mArms)	φD × L (mm)	20℃	-40℃	(mArms)
47	—	—	—	—	6.3 × 5.8	1.2	22	110	6.3 × 5.8	1.2	22	110
100	6.3 × 5.8	1.2	22	110	6.3 × 5.8	1.2	22	110	6.3 × 7.7	0.60	12	220
220	6.3 × 7.7	0.60	12	220	6.3 × 7.7	0.60	12	220	8 × 10	0.30	5.5	296
330	8 × 10	0.30	5.5	296	8 × 10	0.30	5.5	296	10 × 10	0.20	3.6	440
470	8 × 10	0.30	5.5	296	10 × 10	0.20	3.6	440	—	—	—	—
680	10 × 10	0.20	3.6	440	10 × 10	0.20	3.6	440	—	—	—	—

Rated voltage (V) / Item / Rated capacitance (μF)	35				50				63			
	Case	ESR (Ω max.)		Rated ripple current	Case	ESR (Ω max.)		Rated ripple current	Case	ESR (Ω max.)		Rated ripple current
	φD × L (mm)	20℃	-40℃	(mArms)	φD × L (mm)	20℃	-40℃	(mArms)	φD × L (mm)	20℃	-40℃	(mArms)
22	—	—	—	—	6.3 × 5.8	3.2	48	58	6.3 × 7.7	1.8	36	80
33	—	—	—	—	6.3 × 5.8	3.2	48	58	—	—	—	—
47	6.3 × 5.8	1.2	22	110	6.3 × 7.7	1.2	18	95	8 × 10	0.70	14	140
100	6.3 × 7.7	0.60	12	220	8 × 10	0.50	7.5	180	10 × 10	0.50	10	200
220	8 × 10	0.30	5.5	296	10 × 10	0.30	4.5	280	—	—	—	—
330	10 × 10	0.20	3.6	440	—	—	—	—	—	—	—	—

Rated voltage (V) / Item / Rated capacitance (μF)	80			
	Case	ESR (Ω max.)		Rated ripple current
	φD × L (mm)	20℃	-40℃	(mArms)
47	8 × 10	0.75	15	110
68	10 × 10	0.55	11	150

(Note) Rated ripple current : 125℃ , 100kHz
ESR : 100kHz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

RZE, RME VERTICAL CHIP TYPE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Chip Type, 125°C Use, High CV, Long Life Capacitors

GREEN CAP | SMD | Low ESR | 125°C 2000hours | Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guaranteed 2000 hours at 125°C.

High CV, Long Life

RZE ⇦ RVT

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +125
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 35 tanδ (max.): 0.14 (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 35 Impedance Ratio (max.) Z−25℃/Z+20℃: 2 Impedance Ratio (max.) Z−40℃/Z+20℃: 3 (120Hz)
Endurance (125℃) (Applied ripple current)	Test time: 2000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 300% or less of the initial specified value
Shelf life (125℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

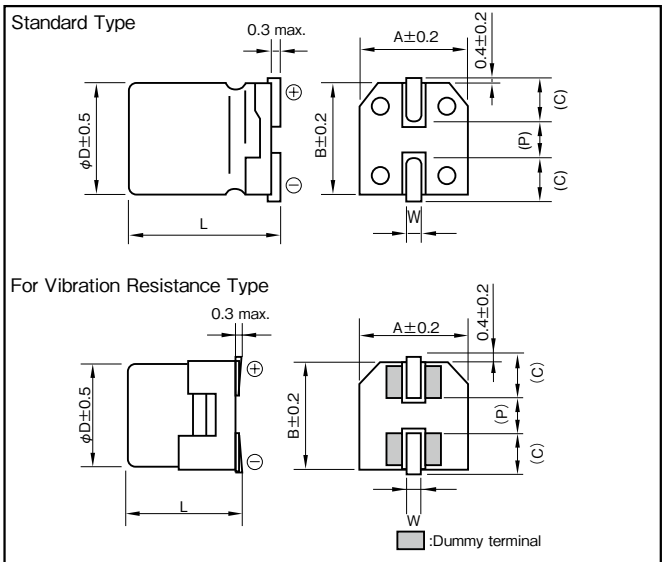

( ): Reference size

φD	L	A	B	C	W	P	Casing symbol
6.3	7.7±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	F80

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping spesifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage(V) \ Frequency (Hz)	120	1k	10k	100k
35	0.77	0.88	0.96	1

Part numbering system

Standard Type (example : 35V47μF)

RZE	—	35	V	470	M	F80	U	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

For Vibration Resistance Type (example : 35V47μF)

RME	—	35	V	470	M	F80	U	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	35				
	Case	ESR (Ω max.)			Rated ripple current
	φD × L (mm)	20℃	-40℃	After Endurance -40℃	(mArms)
47	6.3 × 7.7	0.30	3	6	240
100	6.3 × 7.7	0.30	3	6	240

(Note) Rated ripple current : 125℃ , 100kHz
ESR : 100kHz

RVX, RTX VERTICAL CHIP TYPE ALUMINUM ELECTROLYTIC CAPACITORS ELNA®

Chip Type, 135°C Capacitors

GREEN CAP | SMD | 135℃ 1000hours | Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 1000 hours 135℃.

RVX

High temperature ⇧

RVT

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +135
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 25 / 35; tanδ (max.): 0.24 / 0.20 (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 25 / 35; Impedance Ratio (max.) Z−25℃/Z+20℃: 2 / 2; Z−40℃/Z+20℃: 3 / 3 (120Hz)
Endurance (135℃) (Applied ripple current)	Test time: 1000 hours; Leakage current: The initial specified value or less; Percentage of Capacitance change: Within ±30% of initial value; Tangent of loss angle: 300% or less of the initial specified value
Shelf life (135℃)	Test time : 500hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Coefficient of Frequency for Rated Ripple Current

Rated voltage(V) \ Frequency (Hz)	120	1k	10k	100k
25 to 35	0.77	0.88	0.96	1

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Part numbering system (example : 25V330μF)

Standard Type

RVX	—	25	V	331	M	H10	U	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

For Vibration Resistance Type

RTX	—	25	V	331	M	H10	U	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

Outline Drawing

Unit : mm

Standard Type

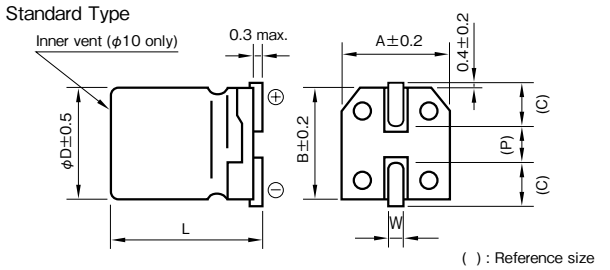

( ) : Reference size

φD	L	A	B	C	W	P	Casing symbol
8	10±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	G10
10	10±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	H10

For Vibration Resistance Type

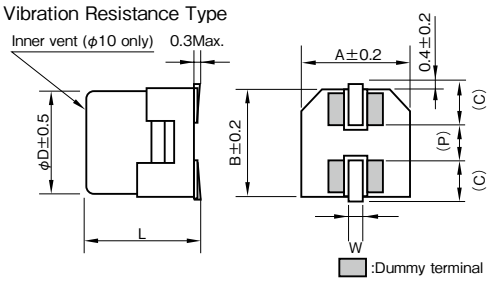

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	25 Case φD × L (mm)	25 Casing symbol	25 ESR (Ω max.)	25 Rated ripple current (mArms)	35 Case φD × L (mm)	35 Casing symbol	35 ESR (Ω max.)	35 Rated ripple current (mArms)
22	—	—	—	—	8 × 10	G10	0.70	115
33	8 × 10	G10	0.70	115	8 × 10	G10	0.70	115
	10 × 10	H10	0.50	155	10 × 10	H10	0.50	155
47	8 × 10	G10	0.70	115	8 × 10	G10	0.70	115
	10 × 10	H10	0.50	155	10 × 10	H10	0.50	155
100	8 × 10	G10	0.70	115	8 × 10	G10	0.70	115
	10 × 10	H10	0.50	155	10 × 10	H10	0.50	155
220	8 × 10	G10	0.70	115	10 × 10	H10	0.50	155
	10 × 10	H10	0.50	155				
330	10 × 10	H10	0.50	155	—	—	—	—

(Note) Rated ripple current : 135℃ , 100kHz
ESR : 20℃, 100kHz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Chip type 105°C Capacitors(height:4.5mm)

GREEN CAP | SMD | 105°C 1000hours | Anti-cleaning solvent

- Compatible with surface mounting for 4.5mm height capacitors.
- Supplied with carrier taping.
- Guarantees 1000 hours 105℃.

High temperature

RVE ⇦ RV4

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF), V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	

Rated voltage (V)	6.3	10	16	25	35	50
tanδ (max.)	0.38	0.32	0.20	0.16	0.14	0.14

(20℃,120Hz)

Characteristics at high and low temperature

Rated voltage (V)		6.3	10	16	25	35	50
Impedance ratio (max.)	Z−25℃/Z+20℃	4	3	2	2	2	2
	Z−40℃/Z+20℃	10	8	6	4	3	3

(120Hz)

Endurance (105℃) (Applied ripple current)

Test time	1000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value (16WV or less:±25%)
Tangent of loss angle	300% or less of the initial specified value

Item	Performance
Shelf life (105℃)	Test time : 500hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

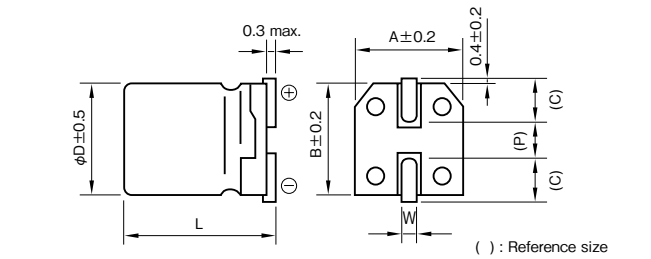

( ) : Reference size

φD	L	A	B	C	W	P	Casing symbol
4	$4.5^{+0.1}_{-0.2}$	4.3	4.3	2.0	0.5 to 0.8	1.0	D46
5	$4.5^{+0.1}_{-0.2}$	5.3	5.3	2.3	0.5 to 0.8	1.5	E46
6.3	$4.5^{+0.1}_{-0.2}$	6.6	6.6	2.7	0.5 to 0.8	2.0	F46

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)		50・60	120	1k	10k・100k
6.3 to 16		0.80	1	1.15	1.25
25 to 35		0.80	1	1.25	1.40
50	1 to 3.3μF	0.50	1	1.35	1.50
	4.7 or more	0.70	1	1.35	1.50

Part numbering system (example : 16V10μF)

RVE	—	16	V	100	M	D46	U —	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping symbol

Standard Ratings

Rated capacitance (μF) \ Rated voltage (V) / Item	6.3			10			16			25			35			50		
	Case φD(mm)	Casing symbol	Rated ripple current (mArms)	Case φD(mm)	Casing symbol	Rated ripple current (mArms)	Case φD(mm)	Casing symbol	Rated ripple current (mArms)	Case φD(mm)	Casing symbol	Rated ripple current (mArms)	Case φD(mm)	Casing symbol	Rated ripple current (mArms)	Case φD(mm)	Casing symbol	Rated ripple current (mArms)
1	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	4	D46	5.4
2.2	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	4	D46	9.6
3.3	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	4	D46	12
4.7	–	–	–	–	–	–	–	–	–	4	D46	11	4	D46	13	5	E46	16
10	–	–	–	–	–	–	4	D46	16	5	E46	20	5	E46	22	6.3	F46	26
22	4	D46	19	5	E46	24	5	E46	26	6.3	F46	33	6.3	F46	36	–	–	–
33	5	E46	26	5	E46	30	6.3	F46	35	6.3	F46	42	–	–	–	–	–	–
47	5	E46	32	6.3	F46	40	6.3	F46	44	–	–	–	–	–	–	–	–	–
100	6.3	F46	52	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–

(Note) Rated ripple current : 105°C, 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Chip Type 105°C Use, Long Life Bipolar Capacitors

GREEN CAP | SMD | 105°C 2000hours | Anti-cleaning solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 2000 hours 105℃.

Long life

RVI ⇦ RVP

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 6.3, 10, 16, 25, 35, 50 tanδ (max.): 0.30, 0.22, 0.16, 0.14, 0.12, 0.12 (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 6.3, 10, 16, 25, 35, 50 Impedance ratio (max.) Z−25℃/Z+20℃: 4, 3, 2, 2, 2, 2 Impedance ratio (max.) Z−40℃/Z+20℃: 8, 6, 4, 4, 3, 3 (120Hz)
Endurance (105℃) (Applied ripple current)	Test time: 2000 hours (with the polarity inverted every 250 hours) Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of loss angle: 200% or less of the initial specified value
Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

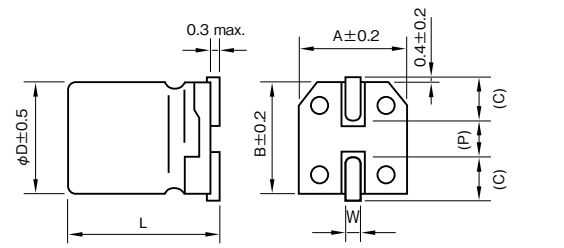

( ) : Reference size

φD	L	A	B	C	W	P	Casing symbol
4	5.8±0.3	4.3	4.3	2.0	0.5 to 0.8	1.0	D61
5	5.8±0.3	5.3	5.3	2.3	0.5 to 0.8	1.5	E61
6.3	5.8±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	F61

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)		50・60	120	1k	10k・100k
6.3 to 16		0.80	1	1.15	1.25
25 to 35		0.80	1	1.25	1.40
50	1 to 3.3μF	0.50	1	1.35	1.50
	4.7μF	0.70	1	1.35	1.50

Part numbering system (example : 6.3V47μF)

RVI	—	6	V	470	M	F61	U —	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping symbol

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3 Case φD×L (mm)	6.3 Rated ripple current (mArms)	10 Case φD×L (mm)	10 Rated ripple current (mArms)	16 Case φD×L (mm)	16 Rated ripple current (mArms)	25 Case φD×L (mm)	25 Rated ripple current (mArms)	35 Case φD×L (mm)	35 Rated ripple current (mArms)	50 Case φD×L (mm)	50 Rated ripple current (mArms)
1	–	–	–	–	–	–	–	–	–	–	4×5.8	10
2.2	–	–	–	–	–	–	–	–	4×5.8	10	–	–
3.3	–	–	–	–	–	–	4×5.8	12	–	–	5×5.8 6.3×5.8	17 20
4.7	–	–	–	–	–	–	4×5.8	12	–	–	6.3×5.8	23
10	–	–	4×5.8	20	5×5.8	25	6.3×5.8	28	–	–	–	–
22	–	–	–	–	–	–	6.3×5.8	55	–	–	–	–
33	–	–	6.3×5.8	41	–	–	–	–	–	–	–	–
47	6.3×5.8	45	–	–	–	–	–	–	–	–	–	–

(Note) Rated ripple current : 105℃, 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

For Vibration Resistance, Chip Type Aluminum Electrolytic Capacitors

Series RTZ	30G	105°C, Low Impedance	···Page 92
Series RTD	30G	105°C, Low Impedance, Long Life	···Page 94
Series RTT	30G	125°C, Low ESR, Long Life	···Page 96
Series RTQ	30G	150°C, Low ESR, Long Life	···Page 98

RTZ VERTICAL CHIP TYPE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Chip Type 105˚C Use, Low Z, For Vibration Capacitors

GREEN CAP | SMD | Vibration Resistance | Low ESR | 105˚C 5000hours | Anti-cleaning solvent

- Compatible with surface mounting.
- For Vibration resistance. (30G guaranteed)
- Supplied with carrier taping.
- Guaranteed 5000 hours at 105℃.
  (φ6.3 : 1000 hours, φ8, φ10 : 2000 hours)

Vibration resistance

RTZ ⇦ RVZ

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 6.3 / 10 / 16 / 25 / 35 tanδ (max.): 0.28 / 0.24 / 0.20 / 0.16 / 0.14 0.02 is added to every 1000μF increase over 1000μF (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 6.3 / 10 / 16 / 25 / 35 Impedance ratio (max.) Z−25℃/Z+20℃: 4 / 3 / 2 / 2 / 2 Impedance ratio (max.) Z−55℃/Z+20℃: 8 / 5 / 4 / 3 / 3 (120Hz)
Endurance (105℃) (Applied ripple current)	Test time: 1000 hours (φ6.3) 2000 hours (φ8, 10) 5000 hours (φ12.5 to 18) Leakage current: The initial specified value or less Percentage of capacitance change: Within ±25% of initial value Tangent of loss angle: 200% or less of the initial specified value
Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

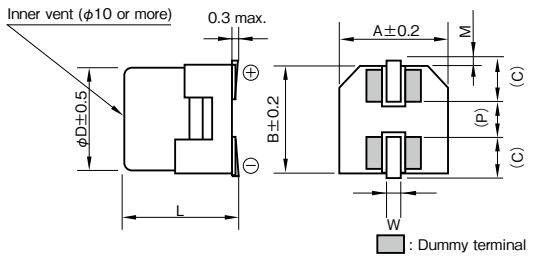

( ) : Reference size

φD	L	A	B	C	W	P	M	Casing symbol
6.3	5.8±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	0.4±0.2	F61
6.3	7.7±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	0.4±0.2	F80
8	10±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	0.4±0.2	G10
8	10.5±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	0.4±0.2	GA5
10	10±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	0.4±0.2	H10
10	10.5±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	0.4±0.2	HA5
12.5	13.5±0.5	13.0	13.0	4.9	1.0 to 1.4	4.6	0.7±0.3	IE
16	16.5±0.5	17.0	17.0	5.6	1.0 to 1.4	7.2	0.7±0.3	JH
16	21.5±0.5	17.0	17.0	5.6	1.0 to 1.4	7.2	0.7±0.3	JM
18	16.5±0.5	19.0	19.0	6.6	1.0 to 1.4	7.2	0.7±0.3	KH
18	21.5±0.5	19.0	19.0	6.6	1.0 to 1.4	7.2	0.7±0.3	KM

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	120	1k	10k	100k
6.3 to 35	0.50	0.75	0.90	1

Part numbering system

φ6.3 (example : 6.3V220μF)

RTZ	—	6	V	221	M	F61	U	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

φ8, φ10 (example : 6.3V1500μF)

RTZ	—	6	V	152	M	HA5	SU	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

φ12.5 or more (example : 6.3V2200μF)

RTZ	—	6	V	222	M	IE	T	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

If "Standard (terminal)" type is required, please see the series RVZ of page 72.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3				10				16				25				35			
	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)
33	—	—	—	—	—	—	—	—	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230
47	—	—	—	—	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230
																	6.3×7.7	F80	0.34	280
68	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×7.7	F80	0.34	280
100	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×7.7	F80	0.34	280	8×10	G10	0.20	450
																	8×10.5	GA5	0.17	450
150	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×7.7	F80	0.34	280	8×10	G10	0.20	450	8×10.5	GA5	0.17	450
													8×10.5	GA5	0.17	450	10×10	H10	0.10	670
220	6.3×5.8	F61	0.44	230	6.3×7.7	F80	0.34	280	6.3×7.7	F80	0.34	280	8×10.5	GA5	0.17	450	8×10.5	GA5	0.17	450
	6.3×7.7	F80	0.34	280	8×10	G10	0.20	450	8×10	G10	0.20	450	10×10	H10	0.10	670	10×10	H10	0.10	670
330	6.3×7.7	F80	0.34	280	8×10.5	GA5	0.17	450	8×10.5	GA5	0.17	450	8×10.5	GA5	0.17	450	10×10.5	HA5	0.090	670
	8×10	G10	0.20	450	10×10	H10	0.10	670	10×10	H10	0.10	670	10×10	H10	0.10	670				
470	8×10.5	GA5	0.17	450	8×10.5	GA5	0.17	450	8×10.5	GA5	0.17	450	10×10.5	HA5	0.090	670	12.5×13.5	IE	0.060	1100
	10×10	H10	0.10	670	10×10	H10	0.10	670	10×10	H10	0.10	670					16×16.5	JH	0.046	1540
680	8×10.5	GA5	0.17	450	10×10.5	HA5	0.090	670	10×10.5	HA5	0.090	670	12.5×13.5	IE	0.060	1100	12.5×13.5	IE	0.060	1100
																	16×16.5	JH	0.046	1540
1000	8×10.5	GA5	0.17	450	10×10.5	HA5	0.090	670	12.5×13.5	IE	0.060	1100	12.5×13.5	IE	0.060	1100	16×16.5	JH	0.046	1540
	10×10	H10	0.10	670					16×16.5	JH	0.046	1540	16×16.5	JH	0.046	1540	18×16.5	KH	0.042	1760
1500	10×10.5	HA5	0.090	670	12.5×13.5	IE	0.060	1100	12.5×13.5	IE	0.060	1100	16×21.5	JM	0.040	1840	—	—	—	—
					16×16.5	JH	0.046	1540	16×16.5	JH	0.046	1540	18×16.5	KH	0.042	1760				
2200	12.5×13.5	IE	0.060	1100	12.5×13.5	IE	0.060	1100	16×16.5	JH	0.046	1540	16×21.5	JM	0.040	1840	18×21.5	KM	0.038	1960
					16×16.5	JH	0.046	1540	18×16.5	KH	0.042	1760	18×16.5	KH	0.042	1760				
3300	16×16.5	JH	0.046	1540	16×16.5	JH	0.046	1540	16×21.5	JM	0.040	1840	18×21.5	KM	0.038	1960	—	—	—	—
					18×16.5	KH	0.042	1760	18×16.5	KH	0.042	1760								
4700	16×21.5	JM	0.040	1840	16×21.5	JM	0.040	1840	18×21.5	KM	0.038	1960	—	—	—	—	—	—	—	—
	18×16.5	KH	0.042	1760	18×21.5	KM	0.038	1960												
6800	18×21.5	KM	0.038	1960	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
8200	18×21.5	KM	0.038	1960	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105℃ , 100kHz
ESR : 20℃ , 100kHz

RTD VERTICAL CHIP TYPE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Chip Type 105°C Use, Low Z, Long Life, For Vibration Capacitors

GREEN CAP | SMD | Vibration Resistance | Low ESR | 105°C 5000hours | Anti-cleaning solvent

- Compatible with surface mounting.
- For Vibration resistance. (30G guaranteed)
- Supplied with carrier taping.
- Guarantees 2000 hours at 105℃.
  (6.3 to 50V 10.0L : 5000 hours)
  (φ12.5x13.5L or more : 5000 hours)

Vibration resistance

RTD ⇦ RVD

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 6.3, 10, 16, 25, 35, 50, 63, 80, 100 tanδ (max.): 0.26, 0.19, 0.16, 0.14, 0.12, 0.1, 0.08, 0.08, 0.07 0.02 is added to every 1000μF increase over 1000μF (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 6.3, 10, 16, 25, 35, 50, 63, 80, 100 Impedance ratio (max.) Z−25℃/Z+20℃: 2, 2, 2, 2, 2, 2, 2, 2, 2 Z−40℃/Z+20℃: 3, 3, 3, 3, 3, 3, 3, 3, 3 Z−55℃/Z+20℃: 8, 4, 4, 3, 3, 3, 3, 3, 3 (120Hz)
Endurance (105℃) (Applied ripple current)	Test time: 2000 hours (6.3 to 50V 10.0L, φ12.5x13.5L or more : 5000 hours) Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of loss angle: 200% or less of the initial specified value (6.3 to 50V 10.0L, φ12.5x13.5L or more : 300% or less)
Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

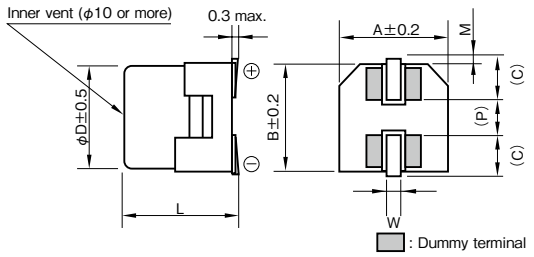

( ) : Reference size

φD	L	A	B	C	W	P	M	Casing symbol
6.3	5.8±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	0.4±0.2	F61
6.3	7.7±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	0.4±0.2	F80
8	10±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	0.4±0.2	G10
10	10±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	0.4±0.2	H10
12.5	13.5±0.5	13.0	13.0	4.9	1.0 to 1.4	4.6	0.7±0.3	IE
16	16.5±0.5	17.0	17.0	5.6	1.0 to 1.4	7.2	0.7±0.3	JH
16	21.5±0.5	17.0	17.0	5.6	1.0 to 1.4	7.2	0.7±0.3	JM
18	16.5±0.5	19.0	19.0	6.6	1.0 to 1.4	7.2	0.7±0.3	KH
18	21.5±0.5	19.0	19.0	6.6	1.0 to 1.4	7.2	0.7±0.3	KM

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50・60	120	1k	10k・100k
6.3 to 100	0.50	0.50	0.75	1

Part numbering system

φ6.3 (example : 6.3V220μF)

RTD	—	6	V	221	M	F61	U	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

φ8, φ10 (example : 6.3V1500μF)

RTD	—	6	V	152	M	H10	SU	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

φ12.5 or more (example : 6.3V2200μF)

RTD	—	6	V	222	M	IE	T	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

If "Standard (terminal)" type is required, please see the series RVD of page 74.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3				10				16				25				35			
	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)
33	–	–	–	–	–	–	–	–	–	–	–	–	6.3×5.8	F61	0.36	250	6.3×5.8	F61	0.36	250
47	–	–	–	–	–	–	–	–	6.3×5.8	F61	0.36	250	6.3×5.8	F61	0.36	250	6.3×5.8	F61	0.36	250
100	–	–	–	–	–	–	–	–	6.3×5.8	F61	0.36	250	6.3×7.7	F80	0.30	300	6.3×7.7	F80	0.30	300
																	8×10	G10	0.16	600
220	6.3×5.8	F61	0.36	250	6.3×7.7	F80	0.30	300	6.3×7.7	F80	0.30	300	8×10	G10	0.16	600	8×10	G10	0.16	600
330	6.3×7.7	F80	0.30	300	8×10	G10	0.16	600	8×10	G10	0.16	600	8×10	G10	0.16	600	10×10	H10	0.090	850
470	8×10	G10	0.16	600	8×10	G10	0.16	600	8×10	G10	0.16	600	10×10	H10	0.090	850	12.5×13.5	IE	0.054	1160
680	8×10	G10	0.16	600	10×10	H10	0.090	850	10×10	H10	0.090	850	12.5×13.5	IE	0.054	1160	12.5×13.5	IE	0.054	1160
1000	8×10	G10	0.16	600	10×10	H10	0.090	850	12.5×13.5	IE	0.054	1160	12.5×13.5	IE	0.054	1160	16×16.5	JH	0.044	1620
1500	10×10	H10	0.090	850	12.5×13.5	IE	0.054	1160	12.5×13.5	IE	0.054	1160	16×16.5	JH	0.044	1620	18×16.5	KH	0.040	1840
2200	12.5×13.5	IE	0.054	1160	12.5×13.5	IE	0.054	1160	16×16.5	JH	0.044	1620	16×21.5	JM	0.038	1920	18×21.5	KM	0.036	2080
									18×16.5	KH	0.040	1840	18×16.5	KH	0.040	1840				
3300	16×16.5	JH	0.044	1620	16×16.5	JH	0.044	1620	16×21.5	JM	0.038	1920	18×21.5	KM	0.036	2080	–	–	–	–
									18×16.5	KH	0.040	1840					–	–	–	–
4700	18×16.5	KH	0.040	1840	18×21.5	KM	0.036	2080	18×21.5	KM	0.036	2080	–	–	–	–	–	–	–	–
6800	18×16.5	KH	0.040	1840	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
8200	18×21.5	KM	0.036	2080	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–

Rated voltage (V) / Item / Rated capacitance (μF)	50				63				80				100			
	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)
10	6.3×5.8	F61	0.86	170	–	–	–	–	–	–	–	–	–	–	–	–
22	6.3×5.8	F61	0.86	170	–	–	–	–	8×10	G10	0.90	130	8×10	G10	1.30	130
33	6.3×7.7	F80	0.66	195	8×10	G10	0.65	250	8×10	G10	0.90	130	10×10	H10	0.70	200
47	6.3×7.7	F80	0.66	195	8×10	G10	0.65	250	10×10	H10	0.50	200	–	–	–	–
68	–	–	–	–	8×10	G10	0.65	250	–	–	–	–	–	–	–	–
100	8×10	G10	0.32	350	10×10	H10	0.35	400	12.5×13.5	IE	0.18	550	16×16.5	JH	0.17	700
					12.5×13.5	IE	0.16	600								
220	10×10	H10	0.18	700	12.5×13.5	IE	0.16	600	16×16.5	JH	0.16	720	18×16.5	KH	0.15	800
330	12.5×13.5	IE	0.12	900	16×16.5	JH	0.14	800	18×16.5	KH	0.13	830	18×21.5	KM	0.13	940
470	16×16.5	JH	0.080	1000	18×16.5	KH	0.12	900	18×21.5	KM	0.11	1000	–	–	–	–
680	16×16.5	JH	0.080	1000	18×21.5	KM	0.10	1050	–	–	–	–	–	–	–	–
1000	18×16.5	KH	0.076	1100	–	–	–	–	–	–	–	–	–	–	–	–

(Note) Rated ripple current : 105℃ , 100kHz
ESR : 20℃ , 100kHz

RTT VERTICAL CHIP TYPE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Chip Type 125°C Use, Low ESR, For Vibration Capacitors

GREEN CAP | SMD | Vibration Resistance | Low ESR | 125°C 2000hours | Anti-cleaning solvent

- Compatible with surface mounting.
- For Vibration resistance. (30G guaranteed)
- Supplied with carrier taping.
- Guaranteed 5000 hours at 125℃.
  (φ6.3 : 1000 hours, φ8, φ10 : 2000 hours)

Vibration resistance

RTT ⇦ RVT

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +125
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	

Rated voltage (V)	10	16	25	35	50	63	80	100
Tangent of loss angle	0.24	0.20	0.16	0.14	0.14	0.12	0.12	0.10

0.02 is added to every 1000μF increase over 1000μF (20℃,120Hz)

Characteristics at high and low temperature

Rated voltage (V)		10	16	25	35	50	63	80	100
Impedance ratio (max.)	Z−25℃/Z+20℃	3	2	2	2	2	2	2	2
	Z−40℃/Z+20℃	4	3	3	3	3	3	3	3

(120Hz)

Endurance (125℃) (Applied ripple current)

Test time	1000 hours (φ6.3) 2000 hours (φ8, φ10) 5000 hours (φ12.5 or more)
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±30% of initial value
Tangent of loss angle	300% or less of the initial specified value

Shelf life (125℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

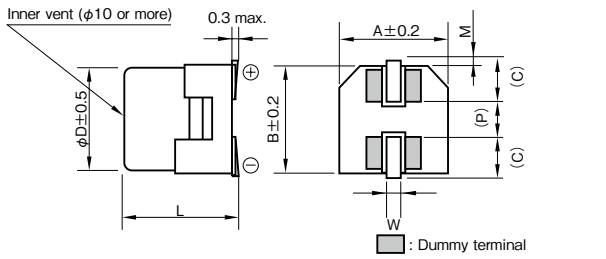

( ) : Reference size

φD	L	A	B	C	W	P	M	Casing symbol
6.3	5.8±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	0.4±0.2	F61
6.3	7.7±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	0.4±0.2	F80
8	10±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	0.4±0.2	G10
10	10±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	0.4±0.2	H10
12.5	13.5±0.5	13.0	13.0	4.9	1.0 to 1.4	4.6	0.7±0.3	IE
16	16.5±0.5	17.0	17.0	5.6	1.0 to 1.4	7.2	0.7±0.3	JH
16	21.5±0.5	17.0	17.0	5.6	1.0 to 1.4	7.2	0.7±0.3	JM
18	16.5±0.5	19.0	19.0	6.6	1.0 to 1.4	7.2	0.7±0.3	KH
18	21.5±0.5	19.0	19.0	6.6	1.0 to 1.4	7.2	0.7±0.3	KM

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	120	1k	10k	100k
10 to 100	0.77	0.88	0.96	1

Part numbering system

φ6.3 (10V220μF)

RTT	—	10	V	221	M	F80	U	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

φ8, φ10 (example : 35V100μF)

RTT	—	35	V	101	M	H10	SU	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

φ12.5 or more (example : 35V1000μF)

RTT	—	35	V	102	M	KM	T	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

If "Standard (terminal)" type is required, please see the series RVT of page 80.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	10				16				25				35				50			
	Case φD × L (mm)	ESR (Ω max.) 20℃	ESR (Ω max.) − 40℃	Rated ripple current (mArms)	Case φD × L (mm)	ESR (Ω max.) 20℃	ESR (Ω max.) − 40℃	Rated ripple current (mArms)	Case φD × L (mm)	ESR (Ω max.) 20℃	ESR (Ω max.) − 40℃	Rated ripple current (mArms)	Case φD × L (mm)	ESR (Ω max.) 20℃	ESR (Ω max.) − 40℃	Rated ripple current (mArms)	Case φD × L (mm)	ESR (Ω max.) 20℃	ESR (Ω max.) − 40℃	Rated ripple current (mArms)
10	–	–	–	–	–	–	–	–	–	–	–	–	6.3×5.8	1.0	15	114	6.3×5.8	3.2	48	58
22	–	–	–	–	–	–	–	–	6.3×5.8	1.0	15	114	6.3×5.8	1.0	15	114	6.3×7.7	1.2	18	95
33	–	–	–	–	6.3×5.8	1.0	15	114	6.3×5.8	1.0	15	114	6.3×7.7	0.60	9.0	165	6.3×7.7	1.2	18	95
																	8×10	0.50	7.5	180
47	–	–	–	–	6.3×5.8	1.0	15	114	6.3×7.7	0.60	9.0	165	6.3×7.7	0.60	9.0	165	8×10	0.50	7.5	180
													8×10	0.20	2.0	340	10×10	0.30	4.5	280
100	–	–	–	–	–	–	–	–	6.3×7.7	0.60	9.0	165	8×10	0.20	2.0	340	10×10	0.30	4.5	280
									8×10	0.20	2.0	340	10×10	0.15	1.5	500	12.5×13.5	0.18	2.7	550
220	6.3×7.7	0.60	9.0	165	8×10	0.20	2.0	340	8×10	0.20	2.0	340	8×10	0.20	2.0	340	12.5×13.5	0.18	2.7	550
					10×10	0.15	1.5	500	10×10	0.15	1.5	500	10×10	0.15	1.5	500				
330	8×10	0.20	2.0	340	10×10	0.15	1.5	500	10×10	0.15	1.5	500	12.5×13.5	0.086	1.29	750	16×16.5	0.12	1.8	850
	10×10	0.15	1.5	500					12.5×13.5	0.086	1.29	750	16×16.5	0.060	0.90	1000				
470	10×10	0.15	1.5	500	12.5×13.5	0.086	1.29	750	12.5×13.5	0.086	1.29	750	16×16.5	0.060	0.90	1000	18×16.5	0.10	1.5	920
									16×16.5	0.060	0.90	1000								
680	12.5×13.5	0.086	1.29	750	12.5×13.5	0.086	1.29	750	16×16.5	0.060	0.90	1000	18×16.5	0.050	0.75	1200	–	–	–	–
					16×16.5	0.060	0.90	1000	18×16.5	0.050	0.75	1200								
1000	12.5×13.5	0.086	1.29	750	18×16.5	0.050	0.75	1200	18×21.5	0.042	0.63	1550	18×21.5	0.042	0.63	1550	–	–	–	–
2200	16×16.5	0.060	0.90	1000	18×16.5	0.050	0.75	1200	–	–	–	–	–	–	–	–	–	–	–	–
3300	18×16.5	0.050	0.75	1200	18×21.5	0.042	0.63	1550	–	–	–	–	–	–	–	–	–	–	–	–
4700	18×21.5	0.042	0.63	1550	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–

Rated voltage (V) / Item / Rated capacitance (μF)	63				80				100			
	Case φD × L (mm)	ESR (Ω max.) 20℃	ESR (Ω max.) − 40℃	Rated ripple current (mArms)	Case φD × L (mm)	ESR (Ω max.) 20℃	ESR (Ω max.) − 40℃	Rated ripple current (mArms)	Case φD × L (mm)	ESR (Ω max.) 20℃	ESR (Ω max.) − 40℃	Rated ripple current (mArms)
10	–	–	–	–	8×10	0.75	15	110	8×10	0.75	15	110
22	8×10	0.70	14	140	8×10	0.75	15	110	8×10	0.75	15	110
					10×10	0.55	11	150	10×10	0.55	11	150
33	8×10	0.70	14	140	8×10	0.75	15	110	10×10	0.55	11	150
	10×10	0.50	10	200	10×10	0.55	11	150				
47	8×10	0.70	14	140	–	–	–	–	12.5×13.5	0.32	4.8	300
	10×10	0.50	10	200								
100	12.5×13.5	0.25	3.75	400	16×16.5	0.24	3.6	480	16×16.5	0.24	3.6	480
220	16×16.5	0.22	3.3	500	16×21.5	0.18	2.7	600	18×21.5	0.16	2.4	700
330	16×16.5	0.22	3.3	500	18×21.5	0.12	1.8	1000	–	–	–	–
470	16×21.5	0.16	2.4	650	–	–	–	–	–	–	–	–

(Note) Rated ripple current : 125℃ , 100kHz
ESR : 100kHz

Chip Type 150˚C Use, Low ESR, For Vibration Capacitors

GREEN CAP | SMD | Vibration Resistance | Low ESR | 150˚C 1000hours | Anti-cleaning solvent

- Compatible with surface mounting.
- For Vibration resistance. (30G guaranteed)
- Supplied with carrier taping.
- Guaranteed 1000 hours at 150°C.

High temperature

RTQ ⇦ RTT

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +150
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	Less than 0.02CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 10, 16, 25, 35 tanδ (max.): 0.26, 0.20, 0.16, 0.14 0.02 is added to every 1000μF increase over 1000μF (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 10, 16, 25, 35 Impedance ratio (max.) Z−25℃/Z+20℃: 3, 2, 2, 2 Impedance ratio (max.) Z−40℃/Z+20℃: 7, 5, 3, 3 (120Hz)
Endurance (150℃) (Applied ripple current)	Test time: 1000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of loss angle: 300% or less of the initial specified value
Shelf life (150℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

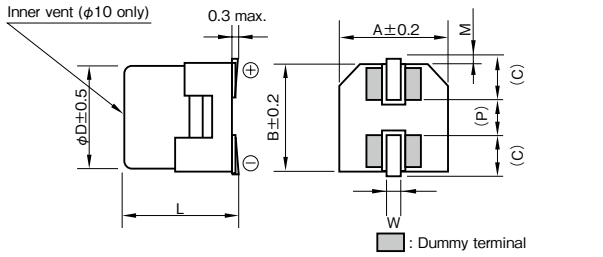

( ) : Reference size

φD	L	A	B	C	W	P	M	Casing symbol
8	10±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	0.4±0.2	G10
10	10±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	0.4±0.2	H10

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	120	1k	10k	100k
10 to 35	0.77	0.88	0.96	1

Part numbering system

φ10X10L (example : 35V100μF)

RTQ	—	35	V	101	M	H10	U	Q	—	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Additional symbol		Taping symbol

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	10				16				25			
	Case φD×L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)
47	—	—	—	—	8 × 10	G10	0.70	120	8 × 10	G10	0.70	120
68	—	—	—	—	8 × 10	G10	0.70	120	8 × 10	G10	0.70	120
100	8 × 10	G10	0.70	120	8 × 10	G10	0.70	120	8 × 10	G10	0.70	120
150	—	—	—	—	10 × 10	H10	0.40	160	10 × 10	H10	0.40	160
220	8 × 10	G10	0.70	120	10 × 10	H10	0.40	160	10 × 10	H10	0.40	160
330	10 × 10	H10	0.40	160	10 × 10	H10	0.40	160	—	—	—	—
470	10 × 10	H10	0.40	160	—	—	—	—	—	—	—	—

Rated voltage (V) / Item / Rated capacitance (μF)	35			
	Case φD×L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)
33	8 × 10	G10	0.70	120
47	8 × 10	G10	0.70	120
68	8 × 10	G10	0.70	120
100	10 × 10	H10	0.40	160
150	10 × 10	H10	0.40	160

(Note) Rated ripple current : 150℃ , 100kHz ; ESR : 20℃ , 100kHz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Aluminum Electrolytic Capacitors

Conductive Polymer Hybrid Aluminum Electrolytic Capacitors

Aluminum Electrolytic Capacitors With Conductive Polymer Solid Electrolyte

Chip Type Aluminum Electrolytic Capacitors

Miniature Type Aluminum Electrolytic Capacitors

Large Capacitance Aluminum Electrolytic Capacitors

Aluminum Electrolytic Capacitors for Audio

RC3 MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

5mm L, Standard Capacitors

GREEN CAP

• Diameters from ϕ4 to ϕ8mm and a height of 5mm.

Low profile

RC3 ⇦ RC2

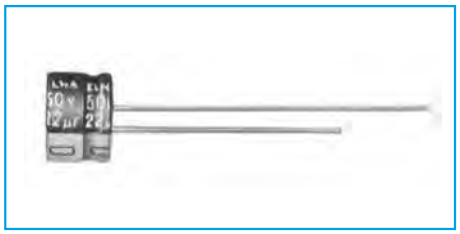

Marking color : White print on a blue sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF); V : Rated voltage (V) (20℃)

Tangent of loss angle (tanδ)

Rated voltage (V)		4	6.3	10	16	25	35	50
tanδ (max.)	ϕ4 to ϕ6.3	0.35	0.24	0.20	0.16	0.14	0.12	0.10
	ϕ8	0.39	0.28	0.24	0.16	0.14	0.12	0.10

(20℃,120Hz)

Characteristics at high and low temperature

Rated voltage (V)		4	6.3	10	16	25	35	50
Impedance ratio (max.)	Z−25℃/Z+20℃	6	4	3	2	2	2	2
	Z−40℃/Z+20℃	16	10	8	6	4	4	4

(120Hz)

Endurance (85℃) (Applied ripple current)

Test time	1000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	200% or less of the initial specified value

Shelf life (85℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

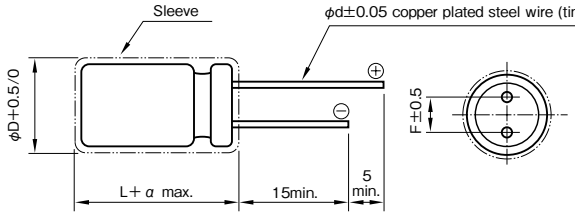

ϕD	4	5	6.3	8
F	1.5	2.0	2.5	2.5
ϕd	0.45	0.45	0.45	0.45
α	1.0	1.0	1.0	1.0
Casing symbol	D0	E0	F0	G0

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50・60	120	1k	10k・100k
4 to 16	0.8	1	1.1	1.2
25 to 35	0.8	1	1.5	1.7
50	0.8	1	1.6	1.9

Part numbering system (example : 6.3V100μF)

RC3	—	6	V	101	M	F0	# —	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping (Forming) symbol

Standard Ratings

Rated capacitance (μF) \ Rated voltage (V) / Item	4		6.3		10		16		25		35		50	
	Case ϕD×L (mm)	Rated ripple current (mArms)	Case ϕD×L (mm)	Rated ripple current (mArms)	Case ϕD×L (mm)	Rated ripple current (mArms)	Case ϕD×L (mm)	Rated ripple current (mArms)	Case ϕD×L (mm)	Rated ripple current (mArms)	Case ϕD×L (mm)	Rated ripple current (mArms)	Case ϕD×L (mm)	Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	—	—	4×5	10
2.2	—	—	—	—	—	—	—	—	—	—	4×5	14	4×5	15
3.3	—	—	—	—	—	—	—	—	4×5	15	4×5	17	4×5	18
4.7	—	—	—	—	—	—	4×5	17	4×5	18	4×5	20	5×5	25
10	—	—	4×5	20	4×5	22	4×5	25	5×5	30	5×5	30	6.3×5	40
22	4×5	25	4×5	30	5×5	35	5×5	40	6.3×5	50	6.3×5	55	8×5	75
33	4×5	30	5×5	40	5×5	45	6.3×5	60	6.3×5	65	8×5	80	8×5	90
47	4×5	35	5×5	50	6.3×5	65	6.3×5	70	8×5	95	8×5	100	—	—
100	5×5	60	6.3×5	85	6.3×5	95	8×5	125	8×5	135	—	—	—	—
220	6.3×5	105	8×5	145	8×5	155	—	—	—	—	—	—	—	—
330	8×5	150	8×5	175	—	—	—	—	—	—	—	—	—	—
470	8×5	180	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85°C, 120Hz.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

5mm L, 105°C Use Capacitors

GREEN CAP | 105°C 1000hours | Anti-cleaning solvent

- Diameters from φ4 to φ6.3mm and a height of 5mm.
- Guarantees 1000 hours at 105℃.

R3S

High temperature

RC3

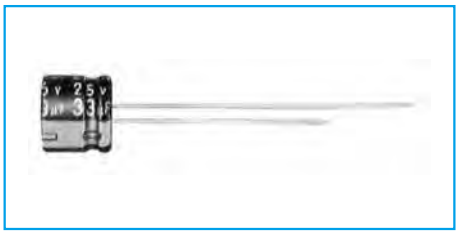

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF); V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	

Rated voltage (V)	6.3	10	16	25	35	50
tanδ (max.)	0.28	0.24	0.20	0.14	0.12	0.10

(20℃,120Hz)

Characteristics at high and low temperature

Rated voltage (V)		6.3	10	16	25	35	50
Impedance ratio (max.)	Z−25℃/Z+20℃	3	3	2	2	2	2
	Z−40℃/Z+20℃	8	5	4	3	3	3

(120Hz)

Endurance (105℃) (Applied ripple current)

Test time	1000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	200% or less of the initial specified value

Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

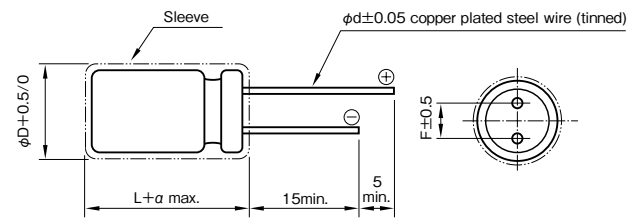

φD	4	5	6.3
F	1.5	2.0	2.5
φd	0.45	0.45	0.45
α	1.0	1.0	1.0
Casing symbol	D0	E0	F0

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50・60	120	1k	10k・100k
6.3 to 16	0.64	0.80	0.92	1
25 to 35	0.57	0.71	0.89	1
50	0.53	0.67	0.90	1

Part numbering system (example : 16V47μF)

R3S	—	16	V	470	M	F0	# —	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping(Forming) symbol

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3 Case φD×L (mm)	6.3 Rated ripple current (mArms)	10 Case φD×L (mm)	10 Rated ripple current (mArms)	16 Case φD×L (mm)	16 Rated ripple current (mArms)	25 Case φD×L (mm)	25 Rated ripple current (mArms)	35 Case φD×L (mm)	35 Rated ripple current (mArms)	50 Case φD×L (mm)	50 Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	4×5	11
2.2	—	—	—	—	—	—	—	—	—	—	4×5	17
3.3	—	—	—	—	—	—	—	—	4×5	17	4×5	20
4.7	—	—	—	—	4×5	15	4×5	18	4×5	20	5×5	27
10	—	—	4×5	20	4×5	23	5×5	31	5×5	34	6.3×5	45
22	4×5	26	5×5	34	5×5	38	6.3×5	53	6.3×5	57	—	—
33	5×5	33	5×5	43	6.3×5	56	6.3×5	66	—	—	—	—
47	5×5	45	6.3×5	58	6.3×5	65	—	—	—	—	—	—
100	6.3×5	78	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105℃, 100kHz.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

RB3 MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

5mm L, Bipolar Capacitors

GREEN CAP

• Diameters from ϕ4 to ϕ6.3mm and a height of 5mm.



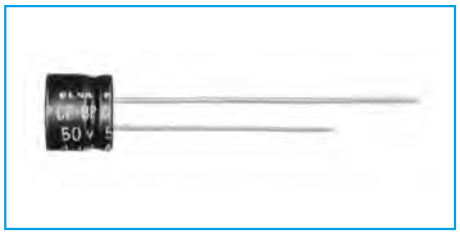

Marking color : White print on a blue sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.03CV + 3 (after 5 minutes) C : Rated capacitance (μF); V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	
Endurance (85℃)	
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Rated voltage (V)		6.3	10	16	25	35	50
tanδ (max.)	ϕ4	0.35	0.30	0.25	0.20	0.20	0.20
	ϕ5, 6.3	0.30	0.25	0.20	0.15	0.15	0.15

(20℃,120Hz)

Test time	1000 hours (with the polarity inverted every 250 hours)
Leakage current	The initial specified value or less
Percentage of capacitance change	Within±20% of initial value
Tangent of the loss angle	200% or less of the initial specified value

Outline Drawing

Unit : mm

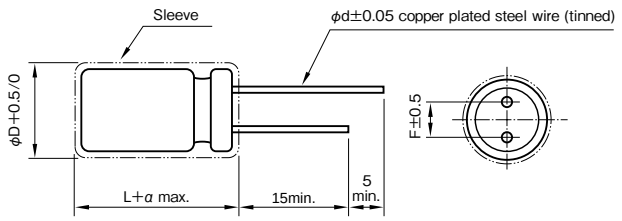

ϕD	4	5	6.3
F	1.5	2.0	2.5
ϕd	0.45	0.45	0.45
α	1.0	1.0	1.0
Casing symbol	D0	E0	F0

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50・60	120	1k	10k・100k
6.3 to 16	0.8	1	1.1	1.2
25 to 35	0.8	1	1.5	1.7
50	0.8	1	1.6	1.9

Part numbering system (example : 10V47μF)

RB3	—	10	V	470	M	F0	#—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping(Forming) symbol

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3 Case ϕD×L (mm)	6.3 Rated ripple current (mArms)	10 Case ϕD×L (mm)	10 Rated ripple current (mArms)	16 Case ϕD×L (mm)	16 Rated ripple current (mArms)	25 Case ϕD×L (mm)	25 Rated ripple current (mArms)	35 Case ϕD×L (mm)	35 Rated ripple current (mArms)	50 Case ϕD×L (mm)	50 Rated ripple current (mArms)
0.33	—	—	—	—	—	—	—	—	—	—	4×5	4
0.47	—	—	—	—	—	—	—	—	—	—	4×5	5
1	—	—	—	—	—	—	—	—	—	—	4×5	7
2.2	—	—	—	—	—	—	—	—	4×5	11	5×5	14
3.3	—	—	—	—	—	—	4×5	13	5×5	17	6.3×5	20
4.7	—	—	—	—	4×5	14	5×5	21	6.3×5	24	6.3×5	24
10	—	—	4×5	18	5×5	26	6.3×5	35	6.3×5	35	—	—
22	5×5	31	6.3×5	40	6.3×5	45	—	—	—	—	—	—
33	6.3×5	45	6.3×5	49	—	—	—	—	—	—	—	—
47	6.3×5	54	6.3×5	59	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85℃, 120Hz.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

7mm L, Standard Capacitors

GREEN CAP | Anti-cleaning solvent

- Diameters from φ4 to φ8mm and a height of 7mm.
- Guarantees 1000 hours at 85℃.

Low Profile

RC2 ⇦ RE3

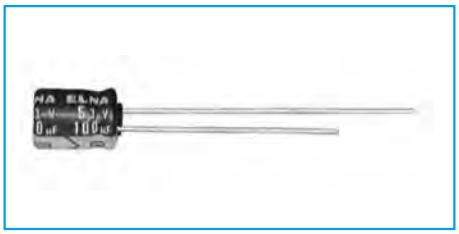

Marking color : White print on a blue sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF); V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	
Characteristics at high and low temperature	
Endurance (85℃) (Applied ripple current)	
Shelf life (85℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Tangent of loss angle (tanδ):

Rated voltage (V)	4	6.3	10	16	25	35	50	63	100
tanδ (max.)	0.35	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.08

(20℃,120Hz)

Characteristics at high and low temperature:

Rated voltage (V)		4	6.3	10	16	25	35	50	63	100
Impedance ratio (max.)	Z−25℃/Z+20℃	6	4	3	2	2	2	2	2	2
	Z−40℃/Z+20℃	16	10	8	6	4	4	4	4	4

(120Hz)

Endurance (85℃) (Applied ripple current):

Test time	1000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	200% or less of the initial specified value

Outline Drawing

Unit : mm

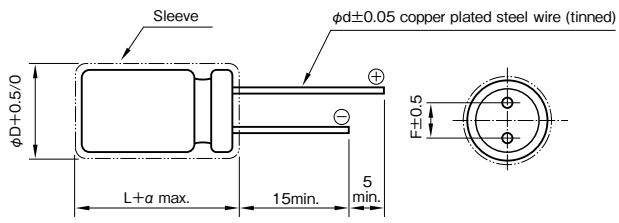

φD	4	5	6.3	8
F	1.5	2.0	2.5	3.5
φd	0.45	0.45	0.45	0.45
α	1.0	1.0	1.0	1.0
Casing symbol	D1	E1	F1	G1

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50・60	120	1k	10k・100k
4 to 16	0.8	1	1.1	1.2
25 to 35	0.8	1	1.5	1.7
50 to 100	0.8	1	1.6	1.9

Part numbering system (example : 10V220μF)

RC2	—	10	V	221	M	G1	#	⬚	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol		Taping(Forming) symbol

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	4		6.3		10		16		25		35		50		63		100	
	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	—	—	4×7	10	4×7	10	4×7	12
2.2	—	—	—	—	—	—	—	—	—	—	—	—	4×7	15	4×7	15	5×7	20
3.3	—	—	—	—	—	—	—	—	4×7	15	4×7	15	4×7	20	4×7	23	6.3×7	30
4.7	—	—	—	—	—	—	—	—	4×7	20	4×7	20	4×7	24	5×7	30	6.3×7	35
10	—	—	—	—	—	—	4×7	25	4×7	30	4×7	30	5×7	40	6.3×7	50	—	—
22	—	—	4×7	35	4×7	35	4×7	40	5×7	50	5×7	55	6.3×7	70	—	—	—	—
33	4×7	35	4×7	40	4×7	45	5×7	55	6.3×7	70	6.3×7	75	8×7	100	—	—	—	—
47	4×7	40	4×7	50	5×7	60	5×7	70	6.3×7	85	8×7	110	—	—	—	—	—	—
100	5×7	70	5×7	80	6.3×7	105	6.3×7	120	8×7	145	—	—	—	—	—	—	—	—
220	6.3×7	120	6.3×7	140	8×7	185	8×7	205	—	—	—	—	—	—	—	—	—	—
330	8×7	170	8×7	205	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85℃, 120Hz.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

R2S MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

7mm L, 105°C Use Capacitors

GREEN CAP | 105°C 1000hours | Anti-cleaning solvent

- Diameters from φ4 to φ6.3mm and a height of 7mm.
- Guarantees 1000 hours at 105℃.

R2S

High temperature

RC2

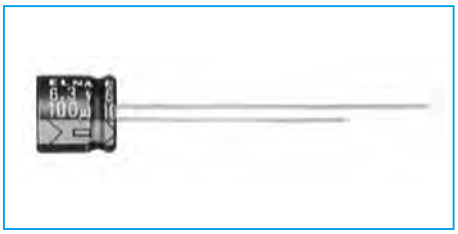

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF); V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 6.3, 10, 16, 25, 35, 50 tanδ (max.): 0.22, 0.19, 0.16, 0.14, 0.12, 0.10 (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 6.3, 10, 16, 25, 35, 50 Impedance ratio (max.) Z−25℃/Z+20℃: 3, 3, 2, 2, 2, 2 Impedance ratio (max.) Z−40℃/Z+20℃: 8, 5, 4, 3, 3, 3 (120Hz)
Endurance (105℃) (Applied ripple current)	Test time: 1000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 200% or less of the initial specified value
Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

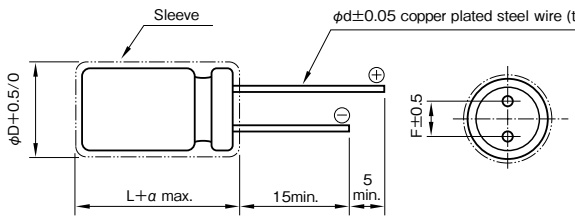

φD	4	5	6.3
F	1.5	2.0	2.5
φd	0.45	0.45	0.45
α	1.0	1.0	1.0
Casing symbol	D1	E1	F1

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50・60	120	1k	10k・100k
6.3 to 16	0.68	0.72	0.92	1
25 to 35	0.48	0.63	0.80	1
50	0.45	0.50	0.70	1

Part numbering system (example : 25V33μF)

R2S	—	25	V	330	M	F1	# —	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping(Forming) symbol

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3 Case φD×L (mm)	6.3 Rated ripple current (mArms)	10 Case φD×L (mm)	10 Rated ripple current (mArms)	16 Case φD×L (mm)	16 Rated ripple current (mArms)	25 Case φD×L (mm)	25 Rated ripple current (mArms)	35 Case φD×L (mm)	35 Rated ripple current (mArms)	50 Case φD×L (mm)	50 Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	4×7	16
2.2	—	—	—	—	—	—	—	—	—	—	4×7	25
3.3	—	—	—	—	—	—	4×7	21	4×7	23	4×7	28
4.7	—	—	—	—	—	—	4×7	25	4×7	25	5×7	48
10	—	—	—	—	4×7	39	5×7	47	5×7	48	6.3×7	75
22	4×7	42	4×7	49	5×7	54	6.3×7	87	6.3×7	90	—	—
33	5×7	53	5×7	60	6.3×7	83	6.3×7	90	—	—	—	—
47	5×7	64	6.3×7	95	6.3×7	95	—	—	—	—	—	—
100	6.3×7	96	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105℃, 100kHz.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

7mm L, Bipolar Capacitors

GREEN CAP | Anti-cleaning solvent

• Diameters from ϕ4 toϕ 6.3mm and a height of 7mm.

Bipolar

RB2 ⇦ RC2

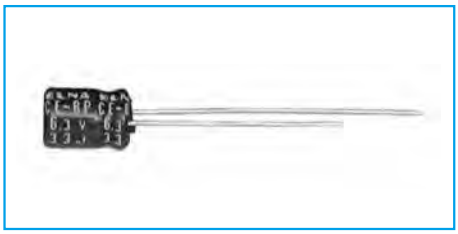

Marking color : White print on a blue sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.03CV + 3 (after 5 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	
Endurance (85℃)	
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Rated voltage (V)	6.3	10	16	25	35	50
tanδ (max.)	0.30	0.25	0.20	0.15	0.15	0.15

(20℃,120Hz)

Test time	1000 hours (with the polarity inverted every 250 hours)
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	200% or less of the initial specified value

Outline Drawing

Unit : mm

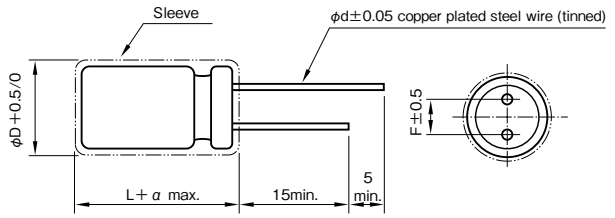

ϕD	4	5	6.3
F	1.5	2.0	2.5
ϕd	0.45	0.45	0.45
α	1.0	1.0	1.0
Casing symbol	D1	E1	F1

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50・60	120	1k	10k・100k
6.3 to 16	0.8	1	1.1	1.2
25 to 35	0.8	1	1.5	1.7
50	0.8	1	1.6	1.9

Part numbering system (example: 16V47μF)

RB2	—	16	V	470	M	F1	# —	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping(Forming) symbol

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3 Case ϕD×L (mm)	6.3 Rated ripple current (mArms)	10 Case ϕD×L (mm)	10 Rated ripple current (mArms)	16 Case ϕD×L (mm)	16 Rated ripple current (mArms)	25 Case ϕD×L (mm)	25 Rated ripple current (mArms)	35 Case ϕD×L (mm)	35 Rated ripple current (mArms)	50 Case ϕD×L (mm)	50 Rated ripple current (mArms)
0.33	—	—	—	—	—	—	—	—	—	—	4×7	5
0.47	—	—	—	—	—	—	—	—	—	—	4×7	6
1	—	—	—	—	—	—	—	—	—	—	4×7	9
2.2	—	—	—	—	—	—	—	—	4×7	14	5×7	16
3.3	—	—	—	—	—	—	4×7	17	5×7	19	5×7	19
4.7	—	—	—	—	4×7	17	5×7	23	5×7	23	6.3×7	27
10	—	—	4×7	23	5×7	29	6.3×7	39	6.3×7	39	—	—
22	5×7	35	5×7	39	6.3×7	50	6.3×7	58	—	—	—	—
33	5×7	43	6.3×7	55	6.3×7	61	6.3×7	71	—	—	—	—
47	6.3×7	60	6.3×7	66	6.3×7	73	—	—	—	—	—	—

(Note) Rated ripple current : 85℃, 120Hz.

RE3 MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Standard Capacitors

GREEN CAP | Anti-cleaning solvent 250V Max.

• Guarantees 2000 hours at 85℃.

RJ4

↑ High temperature

RE3

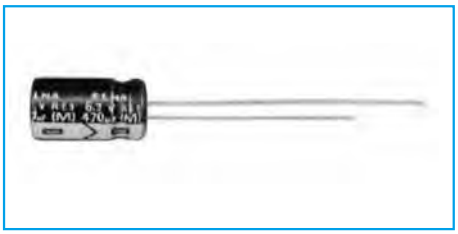

Marking color : White print on a blue sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)

Leakage current (μA)

Rated voltage (V)	6.3 to 100	160 to 450
Leakage current (μA) (max.)	0.03CV or 4 whichever is larger (after 1 minute) 0.01CV or 3 whichever is larger (after 2 minutes)	CV≦1000 : 0.1CV+40 (after 1 minute) CV>1000 : 0.04CV+100 (after 1 minute)

C : Rated capacitance (μF) V: Rated voltage (V) (20℃)

Tangent of loss angle (tanδ)

Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	315	350	400	450
tanδ (max.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.20	0.20	0.24	0.24	0.24	0.24

0.02 is added to every 1000μF increase over 1000μF. (20℃,120Hz)

Characteristics at high and low temperature

Rated voltage (V)		6.3	10	16	25	35	50	63	100	160	200	250	315	350	400	450
Impedance ratio (max.)	Z−25℃/Z+20℃	5	4	3	2	2	2	2	2	4	4	4	4	4	4	4
	Z−40℃/Z+20℃	12	10	8	5	4	3	3	3	15	15	15	10	10	10	10

(120Hz)

Endurance (85℃) (Applied ripple current)

Test time	2000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	200% or less of the initial specified value

Shelf life (85℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

MINIATURE ALUMINUM 85℃

Outline Drawing

Unit : mm

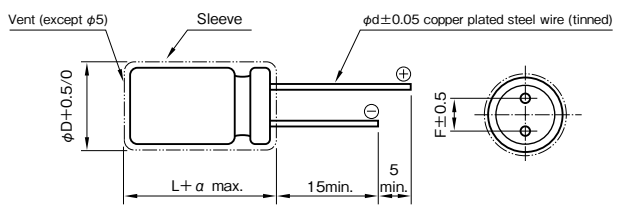

φD	5	6.3	8	10	12.5	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
α	2.0		1.5	2.0	2.5		

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Frequency (Hz) / CV (μF×WV)	50・60	120	1k	10k	100k
6.3 to 16	All CV value	0.8	1	1.1	1.2	1.2
25 to 35	≦1000	0.8	1	1.5	1.7	1.7
	1000<	0.8	1	1.2	1.3	1.3
50 to 100	≦1000	0.8	1	1.6	1.9	1.9
	1000<	0.8	1	1.2	1.3	1.3
160 to 450	All CV value	0.8	1	1.3	1.5	1.6

Part numbering system (example : 16V1000μF)

RE3	—	16	V	102	M	H4	#	⬚	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol		Taping(Forming) symbol

Casing symbol

Size φD×L (mm)	Casing Symbol	Size φD×L (mm)	Casing Symbol
5×11	E3	12.5×25	I6
6.3×11	F3	16×25	J6
8×11.5	G3	16×31.5	J7
10×12.5	H3	16×35.5	J8
10×16	H4	18×31.5	K7
10×20	H5	18×35.5	K8
12.5×20	I5	18×40	K9

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3			10			16			25			35			50			63			100		
	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	5×11	199	21	—	—	—	5×11	133	21
2.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	5×11	90.5	31	—	—	—	5×11	60.3	30
3.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	5×11	60.3	38	—	—	—	5×11	40.2	40
4.7	—	—	—	—	—	—	—	—	—	5×11	56.5	38	5×11	49.4	40	5×11	42.3	45	5×11	35.3	45	5×11	28.2	45
10	—	—	—	—	—	—	5×11	33.2	50	5×11	26.5	55	5×11	23.2	59	5×11	19.9	66	5×11	16.6	66	6.3×11	13.3	75
22	—	—	—	—	—	—	5×11	15.1	75	5×11	12.1	82	5×11	10.6	87	5×11	9.1	98	5×11	7.5	100	6.3×11	6.0	130
33	—	—	—	—	—	—	5×11	10.1	92	5×11	8.0	100	5×11	7.0	107	5×11	6.0	126	6.3×11	5.0	140	8×11.5	4.0	180
47	—	—	—	5×11	8.5	99	5×11	7.1	110	5×11	5.7	118	5×11	4.9	130	6.3×11	4.2	155	6.3×11	3.5	170	10×12.5	2.8	230
100	—	—	—	5×11	3.8	146	5×11	3.3	160	6.3×11	2.7	199	6.3×11	2.3	214	8×11.5	2.0	260	8×11.5	1.7	298	10×20	1.3	370
220	5×11	2.1	200	6.3×11	1.8	240	6.3×11	1.5	264	8×11.5	1.2	349	10×12.5	1.1	443	10×12.5	0.91	443	10×16	0.75	470	12.5×20	0.60	620
330	6.3×11	1.4	270	6.3×11	1.2	290	8×11.5	1.0	383	10×12.5	0.81	510	10×12.5	0.70	542	10×16	0.60	595	10×20	0.50	710	12.5×25	0.40	760
470	6.3×11	0.99	322	8×11.5	0.85	417	8×11.5	0.71	457	10×12.5	0.57	545	10×16	0.49	664	12.5×20	0.42	887	12.5×20	0.35	900	16×25	0.28	1000
1000	8×11.5	0.47	546	10×12.5	0.40	650	10×16	0.33	791	10×20	0.27	996	12.5×20	0.23	1210	12.5×25	0.20	1400	16×25	0.17	1300	18×40	0.13	1380
2200	10×20	0.23	1010	10×20	0.20	1080	12.5×20	0.17	1350	12.5×25	0.14	1660	16×25	0.12	1950	16×35.5	0.11	2340	—	—	—	—	—	—
3300	10×20	0.16	1230	12.5×20	0.14	1430	12.5×25	0.12	1690	16×25	0.10	2030	16×35.5	0.090	2510	18×35.5	0.080	2810	—	—	—	—	—	—
4700	12.5×20	0.12	1710	12.5×25	0.11	1780	16×25	0.092	2100	16×31.5	0.078	2650	18×35.5	0.071	2990	—	—	—	—	—	—	—	—	—
6800	12.5×25	0.093	1930	16×25	0.083	2200	16×35.5	0.073	2580	18×35.5	0.063	3290	—	—	—	—	—	—	—	—	—	—	—	—
10000	16×25	0.076	2450	16×35.5	0.070	2700	18×35.5	0.063	3130	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
15000	16×35.5	0.062	2860	18×35.5	0.058	3100	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
22000	18×40	0.053	3340	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Rated voltage (V) / Item / Rated capacitance (μF)	160			200			250			315			350			400			450		
	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)
0.47	6.3×11	706	15	6.3×11	706	15	6.3×11	706	15	6.3×11	847	15	6.3×11	847	15	6.3×11	847	15	8×11.5	847	18
1	6.3×11	332	22	6.3×11	332	22	6.3×11	332	22	6.3×11	398	22	6.3×11	398	22	6.3×11	398	22	8×11.5	398	25
2.2	6.3×11	151	32	6.3×11	151	32	6.3×11	151	32	8×11.5	181	38	8×11.5	181	38	8×11.5	181	38	10×12.5	181	43
3.3	6.3×11	101	40	6.3×11	101	40	8×11.5	101	48	10×12.5	121	53	10×12.5	121	53	10×12.5	121	54	10×16	121	59
4.7	6.3×11	70.6	48	8×11.5	70.6	56	8×11.5	70.6	56	10×12.5	84.7	65	10×12.5	84.7	65	10×16	84.7	71	10×20	84.7	76
10	8×11.5	33.2	81	10×12.5	33.2	94	10×16	33.2	101	10×20	39.8	115	10×20	39.8	115	12.5×20	39.8	123	12.5×20	39.8	123
22	10×16	15.1	151	10×20	15.1	170	12.5×20	15.1	182	12.5×20	18.1	182	12.5×25	18.1	197	12.5×25	18.1	197	16×25	18.1	226
33	10×20	10.1	202	12.5×20	10.1	223	12.5×25	10.1	243	16×25	12.1	277	16×25	12.1	277	16×25	12.1	277	16×31.5	12.1	304
47	12.5×20	7.06	266	12.5×20	7.06	265	12.5×25	7.06	295	16×25	8.47	330	16×25	8.47	330	16×31.5	8.47	361	16×35.5	8.47	380
100	12.5×25	3.32	422	16×25	3.32	483	16×31.5	3.32	528	18×31.5	3.98	567	18×31.5	3.98	507	—	—	—	—	—	—
220	16×31.5	1.51	783	18×35.5	1.51	882	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
330	18×35.5	1.01	1080	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85℃, 120Hz ; ESR. : 20℃, 120Hz

R2B MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Standard Bipolar Capacitors

GREEN CAP | Anti-cleaning solvent

• Guarantees 2000 hours at 85℃.

Bipolar

R2B

Marking color : White print on a blue sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.03CV + 3 (after 5 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	
Characteristics at high and low temperature	
Endurance (85℃) (Applied ripple current)	
Shelf life (85℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Tangent of loss angle (tanδ):

Rated voltage (V)	6.3	10	16	25	35	50	63	100
tan δ (max.)	0.24	0.24	0.20	0.20	0.16	0.14	0.12	0.10

0.02 is added to every 1000μF increase over 1000μF (20℃,120Hz)

Characteristics at high and low temperature:

Rated voltage (V)		6.3	10	16	25	35	50	63	100
Impedance ratio (max.)	Z−25℃/Z+20℃	4	3	2	2	2	2	2	2
	Z−40℃/Z+20℃	10	8	6	4	3	3	3	3

0.5 for −25℃, 1 for −40℃ are added to every 1000μF increase over 1000μF (120Hz)

Endurance (85℃) (Applied ripple current):

Test time	2000 hours (with the polarity inverted every 250 hours)
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	150% or less of the initial specified value

Outline Drawing

Unit : mm

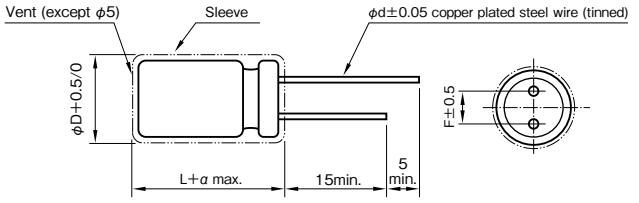

φD	5	6.3	8	10	12.5	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
α	1.5			2.0 (φ10,16L or less : 1.5)			

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50・60	120	1k	10k・100k
6.3 to 16	0.8	1	1.1	1.2
25 to 35	0.8	1	1.5	1.7
50 to 100	0.8	1	1.6	1.9

Part numbering system (example : 10V1000μF)

R2B	—	10	V	102	M	I5	# —	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping(Forming) symbol

Casing symbol

Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol
5×11	E3	10×12.5	H3	12.5×20	I5	16×31.5	J 7
6.3×11	F3	10×16	H4	12.5×25	I6	18×35.5	K8
8×11.5	G3	10×20	H5	16×25	J6		

Standard Ratings

Rated voltage (V) / Item: Rated capacitance (μF)	6.3 Case φD×L (mm)	6.3 Rated ripple current (mArms)	10 Case φD×L (mm)	10 Rated ripple current (mArms)	16 Case φD×L (mm)	16 Rated ripple current (mArms)	25 Case φD×L (mm)	25 Rated ripple current (mArms)	35 Case φD×L (mm)	35 Rated ripple current (mArms)	50 Case φD×L (mm)	50 Rated ripple current (mArms)	63 Case φD×L (mm)	63 Rated ripple current (mArms)	100 Case φD×L (mm)	100 Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	5×11	14	—	—	5×11	16
2.2	—	—	—	—	—	—	—	—	—	—	5×11	21	5×11	23	5×11	24
3.3	—	—	—	—	—	—	—	—	—	—	5×11	26	5×11	28	6.3×11	34
4.7	—	—	—	—	—	—	5×11	28	5×11	28	5×11	31	5×11	34	6.3×11	41
10	—	—	—	—	5×11	39	5×11	40	5×11	42	5×11	45	6.3×11	57	8×11.5	70
22	—	—	5×11	52	5×11	58	5×11	60	6.3×11	71	6.3×11	77	8×11.5	89	10×16	136
33	5×11	58	5×11	63	5×11	71	6.3×11	84	6.3×11	87	8×11.5	111	10×12.5	144	10×20	181
47	5×11	69	5×11	75	6.3×11	97	6.3×11	100	8×11.5	122	10×12.5	157	10×16	188	12.5×20	248
100	6.3×11	115	6.3×11	126	8×11.5	167	10×12.5	204	10×12.5	212	10×20	273	12.5×20	343	16×25	458
220	8×11.5	202	8×11.5	221	10×12.5	294	10×16	332	10×20	375	12.5×25	506	16×25	645	18×35.5	837
330	8×11.5	247	10×12.5	322	10×16	394	10×20	444	12.5×20	526	12.5×25	620	—	—	—	—
470	10×12.5	350	10×16	420	10×20	513	12.5×20	607	12.5×25	685	16×25	861	—	—	—	—
1000	10×20	611	12.5×20	767	12.5×25	935	16×25	1120	16×31.5	1270	—	—	—	—	—	—
2200	12.5×25	1090	16×25	1380	16×31.5	1660	—	—	—	—	—	—	—	—	—	—
3300	16×25	1490	16×31.5	1760	—	—	—	—	—	—	—	—	—	—	—	—
4700	16×31.5	1880	18×35.5	2280	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85℃, 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

105°C Bipolar Capacitors

GREEN CAP | Anti-cleaning solvent

• Guarantees 2000 hours at 105℃.

RJP

High temperature

R2B

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.03CV + 3 (after 5 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 6.3, 10, 16, 25, 35, 50 tanδ (max.): 0.4, 0.3, 0.2, 0.2, 0.16, 0.14 0.02 is added to every 1000μF increase over 1000μF (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 6.3, 10, 16, 25, 35, 50 Impedance ratio (max.) Z−25℃/Z+20℃: 5, 4, 3, 2, 2, 2 Impedance ratio (max.) Z−40℃/Z+20℃: 10, 8, 6, 4, 3, 3 0.5 for −25℃, 1 for −40℃ are added to every 1000μF increase over 1000μF (120Hz)
Endurance (105℃) (Applied ripple current)	Test time: 2000 hours (φ5 to φ8 : 1000 hours) with the polarity inverted every 250 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 200% or less of the initial specified value
Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

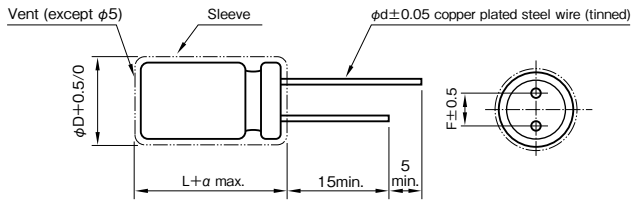

φD	5	6.3	8	10	12.5	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
α	1.5			2.0 (φ10,16L or less : 1.5)			

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50・60	120	1k	10k・100k
6.3 to 16	0.8	1	1.1	1.2
25 to 35	0.8	1	1.5	1.7
50	0.8	1	1.6	1.9

Part numbering system (example : 10V1000μF)

RJP	—	10	V	102	M	I5	# —	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping(Forming) symbol

Casing symbol

Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol
5×11	E3	10×12.5	H3	12.5×20	I5	16×31.5	J7
6.3×11.5	F3	10×16	H4	12.5×25	J6	18×35.5	K8
8×11.5	G3	10×20	H5	16×25			

Standard Ratings

Rated voltage (V) / Rated capacitance (μF) \ Item	6.3 Case φD × L (mm)	6.3 Rated ripple current (mArms)	10 Case φD × L (mm)	10 Rated ripple current (mArms)	16 Case φD × L (mm)	16 Rated ripple current (mArms)	25 Case φD × L (mm)	25 Rated ripple current (mArms)	35 Case φD × L (mm)	35 Rated ripple current (mArms)	50 Case φD × L (mm)	50 Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	5 × 11	12
2.2	—	—	—	—	—	—	—	—	—	—	5 × 11	18
3.3	—	—	—	—	—	—	—	—	—	—	5 × 11	22
4.7	—	—	—	—	—	—	—	—	5 × 11	25	5 × 11	22
10	—	—	—	—	5 × 11	30	5 × 11	34	5 × 11	30	6.3 × 11.5	37
22	—	—	5 × 11	42	5 × 11	40	6.3 × 11.5	55	6.3 × 11.5	51	8 × 11.5	63
33	5 × 11	46	5 × 11	45	5 × 11	49	6.3 × 11.5	56	8 × 11.5	72	8 × 11.5	77
47	5 × 11	54	5 × 11	54	6.3 × 11.5	67	6.3 × 11.5	67	8 × 11.5	86	10 × 12.5	105
100	6.3 × 11.5	90	6.3 × 11.5	96	8 × 11.5	110	8 × 11.5	110	10 × 16	160	10 × 20	190
220	8 × 11.5	150	8 × 11.5	150	10 × 12.5	195	10 × 16	215	12.5 × 20	290	12.5 × 25	340
330	8 × 11.5	185	10 × 16	240	10 × 16	265	12.5 × 20	320	12.5 × 20	350	16 × 25	460
470	10 × 12.5	260	10 × 16	290	10 × 20	345	12.5 × 20	380	12.5 × 25	465	16 × 31.5	590
1000	10 × 20	460	12.5 × 20	510	12.5 × 25	605	16 × 25	670	16 × 31.5	805	—	—
2200	12.5 × 25	820	16 × 25	910	16 × 31.5	1070	18 × 35.5	1140	—	—	—	—
3300	16 × 25	1110	16 × 31.5	1200	18 × 35.5	1400	—	—	—	—	—	—
4700	16 × 31.5	1430	18 × 35.5	1520	—	—	—	—	—	—	—	—
6800	18 × 35.5	1830	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105℃ , 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Low Leakage Current Capacitors

GREEN CAP

• Low leakage current (after 1 minute) : 0.006CV or 0.5 (μA).

Marking color : White print on a blue sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.006CV or 0.5 whichever is larger (after 1 minute) 0.002CV or 0.3 whichever is larger (after 2 minutes), C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)

Tangent of loss angle (tanδ)

Rated voltage (V)		6.3	10	16	25	35	50
tanδ (max.)	More than 1μF	0.20	0.17	0.13	0.10	0.10	0.08
	1μF	0.06	0.06	0.06	0.06	0.06	0.06

(20℃,120Hz)

Characteristics at high and low temperature

Rated voltage (V)		6.3	10	16	25	35	50
Impedance ratio (max.)	Z−25℃/Z+20℃	4	3	2	2	2	2
	Z−40℃/Z+20℃	8	6	4	4	3	3

(120Hz)

Endurance (85℃) (Applied ripple current)

Test time	1000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	150% or less of the initial specified value

Shelf life (85℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

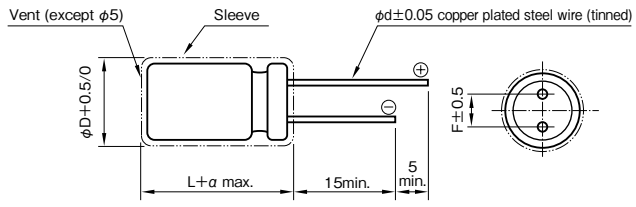

φD	5	6.3	8	10	12.5	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
α	1.5			2.0 (φ10,16L or less : 1.5)			

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Frequency (Hz) / CV (μF×V)	50・60	120	1k	10k・100k
6.3 to 10	All CV value	0.8	1	1.1	1.2
16 to 25	≦1000	0.8	1	1.5	1.7
	1000<	0.8	1	1.2	1.3
35 to 50	All CV value	0.8	1	1.6	1.9

Part numbering system (example : 10V1000μF)

RLB	—	10	V	102	M	I6	#	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping(Forming) symbol

Casing symbol

Case φD×L (mm)	Casing symbol	Case φD×L (mm)	Casing symbol	Case φD×L (mm)	Casing symbol	Case φD×L (mm)	Casing symbol
5×11	E3	10×12.5	H3	12.5×20	I5	16×31.5	J7
6.3×11	F3	10×16	H4	12.5×25	I6	16×35.5	J8
8×11.5	G3	10×20	H5	16×25	J6	18×35.5	K8

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3		10		16		25		35		50	
	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	5×11	20
2.2	—	—	—	—	—	—	—	—	—	—	5×11	26
3.3	—	—	—	—	—	—	—	—	—	—	5×11	32
4.7	—	—	—	—	—	—	5×11	34	5×11	34	6.3×11	43
10	—	—	—	—	5×11	43	6.3×11	57	6.3×11	57	8×11.5	75
22	—	—	5×11	56	6.3×11	74	8×11.5	99	8×11.5	99	10×12.5	131
33	—	—	6.3×11	79	6.3×11	90	8×11.5	121	10×12.5	144	10×16	176
47	—	—	6.3×11	94	8×11.5	127	10×12.5	172	10×12.5	172	10×16	210
100	—	—	8×11.5	160	10×12.5	220	10×16	270	10×20	300	12.5×20	380
220	10×12.5	260	10×16	350	10×20	390	12.5×20	510	12.5×25	550	16×25	720
330	10×16	350	10×20	420	12.5×20	550	12.5×25	680	16×25	790	16×31.5	970
470	10×20	460	12.5×20	570	12.5×20	650	16×25	940	16×25	940	16×35.5	1210
1000	12.5×25	840	12.5×25	910	16×25	1210	16×35.5	1580	18×35.5	1690	—	—
2200	16×25	1440	16×31.5	1710	18×35.5	2200	—	—	—	—	—	—

(Note) Rated ripple current : 85℃, 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

105°C Miniature Capacitors

GREEN CAP | 105℃ 1000hours | Anti-cleaning solvent 250V Max.

• Case size is one rank smaller than Series RJ4.

Miniaturized

RJ5 ⇦ RJ4

Marking color : White print on a black sleeve

Specifications

Item	Performance	
Category temperature range (℃)	−55～+105	−40～+105
Rated voltage (V)	6.3～100	160～450
Tolerance at rated capacitance (%)	±20 (20℃, 120Hz)	
Leakage current (μA) (max.)	0.03CV or 4 whichever is larger (after 1 minute) 0.01CV or 3 whichever is larger (after 2 minutes)	CV ≦ 1000 : 0.1CV+40 (after 1 minute) CV ＞ 1000 : 0.04CV+100 (after 1 minute)
	C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)	

Tangent of loss angle (tanδ)

Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	315	350	400	450
tan δ (max.)	0.34	0.26	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.20	0.20	0.24	0.24	0.24	0.24

0.02 is added to every 1000μF increase over 1000μF. (20℃, 120Hz)

Characteristics at high and low temperature

Rated voltage (V)		6.3	10	16	25	35	50	63	100	160 to 250	315 to 450
Impedance ratio (max.)	Z−25℃/Z+20℃	5	4	3	2	2	2	2	2	4	4
	Z−40℃/Z+20℃	10	8	6	4	3	3	3	3	15	10

(120Hz)

Endurance (105℃) (Applied ripple current)

Test time	2000 hours (φ5 to φ8, 100V or less : 1000 hours)
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	200% or less of the initial specified value

Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

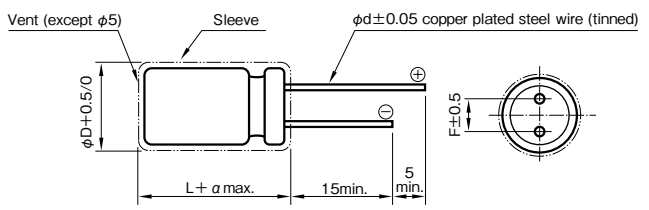

φD	5	6.3	8	10	12.5	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
α	2.0		1.5	2.0	≦100V : 2.0 ≧160V : 2.5		

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Rated capacitance (μF) \ Frequency (Hz)	50・60	120	1k	10k	100k
6.3 to 100	1 to 47	0.8	1	1.5	1.7	2.0
	100 to 220	0.8	1	1.2	1.3	1.4
	330 to 1000	0.8	1	1.2	1.2	1.3
	2200 to 22000	0.8	1	1.1	1.1	1.1
160 to 450	1 to 470	0.8	1	1.3	1.4	1.6

Part numbering system (example : 10V1000μF)

RJ5	—	10	V	102	M	H3	#	□	—	□
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol		Taping(Forming) symbol

In the case of 160V or beyond, should put in optional symbol "B".

Casing symbol

Size φD×L (mm)	Casing Symbol	Size φD×L (mm)	Casing Symbol	Size φD×L (mm)	Casing Symbol	Size φD×L (mm)	Casing Symbol
5×11	E3	10×12.5	H3	16×20	J5	18×20	K5
6.3×11	F3	10×16	H4	16×25	J6	18×25	K6
8×11.5	G3	10×20	H5	16×31.5	J7	18×31.5	K7
—	—	12.5×20	I5	16×35.5	J8	18×35.5	K8
—	—	12.5×25	I6	—	—	18×40	K9

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3		10		16		25		35		50		63		100	
	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	5×11	15	—	—	5×11	15
2.2	—	—	—	—	—	—	—	—	—	—	5×11	22	—	—	5×11	21
3.3	—	—	—	—	—	—	—	—	—	—	5×11	27	—	—	5×11	29
4.7	—	—	—	—	—	—	—	—	—	—	5×11	32	—	—	5×11	32
10	—	—	—	—	—	—	—	—	—	—	5×11	47	—	—	5×11	50
22	—	—	—	—	—	—	—	—	—	—	5×11	70	5×11	71	6.3×11	93
33	—	—	—	—	—	—	—	—	—	—	5×11	90	6.3×11	100	8×11.5	130
47	—	—	—	—	—	—	—	—	5×11	93	6.3×11	115	6.3×11	120	8×11.5	140
68	—	—	—	—	—	—	—	—	6.3×11	110	6.3×11	150	8×11.5	155	10×12.5	190
100	—	—	—	—	—	—	5×11	125	6.3×11	151	8×11.5	190	8×11.5	200	10×16	240
220	—	—	5×11	155	6.3×11	190	6.3×11	200	8×11.5	270	10×12.5	314	10×16	335	12.5×20	390
330	—	—	6.3×11	210	6.3×11	225	8×11.5	310	10×12.5	384	10×16	421	10×20	510	—	—
470	—	—	6.3×11	250	8×11.5	323	10×12.5	429	10×16	470	10×20	540	12.5×20	640	16×25	715
1000	8×11.5	398	10×12.5	460	10×12.5	500	10×16	610	12.5×20	857	12.5×25	1000	16×25	930	18×35.5	960
2200	10×16	635	10×16	705	10×20	710	12.5×25	1180	16×25	1380	16×31.5	1410	18×35.5	1650	—	—
3300	10×20	882	12.5×20	1010	12.5×25	1200	16×25	1440	16×31.5	1500	18×35.5	1990	—	—	—	—
4700	12.5×20	1120	12.5×25	1260	16×25	1500	16×25	1570	16×35.5	1780	—	—	—	—	—	—
6800	12.5×25	1380	16×25	1570	16×25	1600	16×35.5	1850	18×40	2000	—	—	—	—	—	—
10000	16×25	1750	16×31.5	1820	16×35.5	1930	18×40	2000	—	—	—	—	—	—	—	—
15000	16×31.5	1820	16×35.5	2050	18×40	2210	—	—	—	—	—	—	—	—	—	—
22000	18×35.5	2280	18×40	2420	—	—	—	—	—	—	—	—	—	—	—	—

Rated voltage (V) / Item / Rated capacitance (μF)	160		200		250		315		350		400		450	
	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	—	—	6.3×11	12
2.2	—	—	—	—	—	—	6.3×11	21	6.3×11	21	—	—	8×11.5	20
3.3	—	—	—	—	6.3×11	35	6.3×11	26	6.3×11	26	—	—	10×12.5	41
4.7	—	—	6.3×11	42	6.3×11	42	8×11.5	35	8×11.5	35	8×11.5	35	10×12.5	49
10	6.3×11	61	8×11.5	72	8×11.5	72	10×16	74	10×16	67	10×16	67	10×20	86
22	10×12.5	125	10×16	135	10×16 10×20	135 150	12.5×20	135	12.5×20	140	12.5×20	140	12.5×25	170
33	10×16	170	10×20	185	12.5×20	210	12.5×25	195	12.5×25	195	12.5×25 16×20	195 240	16×20	225
47	10×20	220	—	—	12.5×20	250	—	—	—	—	16×25 18×20	350 286	16×25	296
68	12.5×25	330	12.5×20	305	16×20	355	18×20	350	16×31.5 18×20	390 350	16×31.5 18×25	460 380	16×31.5 18×25	390 380
100	16×20	430	12.5×25 16×20	400 430	16×25 18×20	465 465	16×35.5 18×25	500 460	16×35.5 18×25	500 460	18×31.5	505	18×35.5	540
120	16×25 18×20	510 510	16×25 18×20	510 510	16×31.5	560	18×31.5	560	18×31.5	560	18×35.5	588	18×40	615
150	16×25 18×20	570 570	16×31.5 18×25	625 615	16×35.5 18×25	655 615	18×35.5	648	18×35.5 18×40	648 688	18×40	688	—	—
180	18×25	675	16×31.5 18×25	685 675	18×31.5	735	18×40	750	—	—	—	—	—	—
220	18×25	745	16×35.5 18×31.5	790 810	18×35.5	855	—	—	—	—	—	—	—	—
330	—	—	18×40	1090	—	—	—	—	—	—	—	—	—	—
470	18×40	1300	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105° C, 120Hz ; ESR. : 20° C, 120Hz

105°C Miniature Capacitors

GREEN CAP | 105℃ 2000hours | Anti-cleaning solvent 250V Max.

- Case size is one rank smaller than Series RJ3.
- Guarantees 2000 hours at 105℃.
  (ϕ5 to ϕ8 : 1000 hours)

Miniaturized

RJ4 ⇦ RJ3

High temperature ⇧

RE3

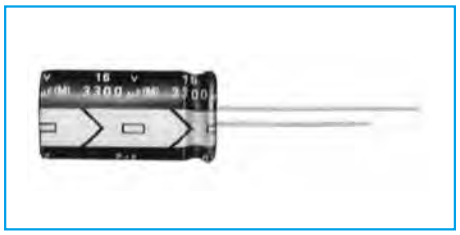

Marking color : White print on a black sleeve

Specifications

Item	Performance	
Category temperature range (℃)	−55 to +105	−40 to +105
Rated voltage (V)	6.3 to 100	160 to 450
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)	
Leakage current (μA) (max.)	0.03CV or 4 whichever is larger (after 1 minute) 0.01CV or 3 whichever is larger (after 2 minutes)	CV ≦ 1000 : 0.1CV+40 (after 1 minute) CV > 1000 : 0.04CV+100 (after 1 minute)
	C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)	

Tangent of loss angle (tanδ)

Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	315	350	400	450
tan δ (max.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.20	0.20	0.24	0.24	0.24	0.24

0.02 is added to every 1000μF increase over 1000μF. (20℃,120Hz)

Characteristics at high and low temperature

Rated voltage (V)		6.3	10	16	25	35	50	63	100	160 to 250	315 to 450
Impedance ratio (max.)	Z−25℃/Z+20℃	5	4	3	2	2	2	2	2	4	4
	Z−40℃/Z+20℃	10	8	6	4	3	3	3	3	15	10

(120Hz)

Endurance (105℃) (Applied ripple current)

Test time	2000 hours (ϕ5 to ϕ8 : 1000 hours)
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	200% or less of the initial specified value

Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

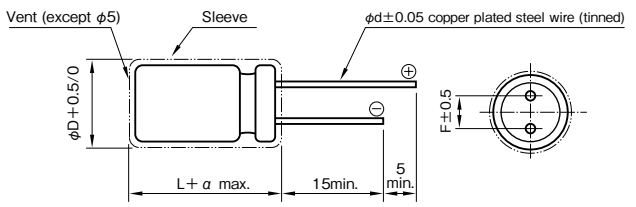

ϕD	5	6.3	8	10	12.5	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
ϕd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
α	2.0		1.5	2.0	2.5		

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Rated capacitance (μF) \ Frequency (Hz)	50・60	120	1k	10k	100k
6.3 to 100	1 to 47	0.8	1	1.5	1.7	2.0
	100 to 220	0.8	1	1.2	1.3	1.4
	330 to 1000	0.8	1	1.2	1.2	1.3
	2200 to 22000	0.8	1	1.1	1.1	1.1
160 to 450	1 to 330	0.8	1	1.3	1.4	1.6

Part numbering system (example : 16V2200μF)

RJ4	—	16	V	222	M	I5	#	⬚	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol		Taping(Forming) symbol

Casing symbol

Size ϕD×L (mm)	Casing Symbol	Size ϕD×L (mm)	Casing Symbol
5×11	E3	12.5×25	I6
6.3×11	F3	16×25	J6
8×11.5	G3	16×31.5	J7
10×12.5	H3	16×35.5	J8
10×16	H4	18×31.5	K7
10×20	H5	18×35.5	K8
12.5×20	I5	18×40	K9

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3			10			16			25			35			50			63			100		
	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	5×11	199	15	—	—	—	5×11	133	15
2.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	5×11	90.5	22	—	—	—	5×11	60.3	21
3.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	5×11	60.3	27	—	—	—	5×11	40.2	29
4.7	—	—	—	—	—	—	—	—	—	5×11	56.5	27	5×11	49.4	30	5×11	42.4	32	—	—	—	5×11	28.2	32
10	—	—	—	—	—	—	5×11	33.2	37	5×11	26.5	39	5×11	23.2	43	5×11	19.9	47	5×11	16.6	46	6.3×11	13.3	54
22	—	—	—	—	—	—	5×11	15.1	54	5×11	12.1	58	5×11	10.6	64	5×11	9.05	70	5×11	7.54	71	6.3×11	6.03	93
33	—	—	—	—	—	—	5×11	10.1	67	5×11	8.04	71	5×11	7.04	78	5×11	6.03	90	6.3×11	5.03	100	8×11.5	4.02	130
47	—	—	—	5×11	8.47	72	5×11	7.06	79	5×11	5.65	84	5×11	4.94	90	6.3×11	4.24	115	6.3×11	3.53	120	10×12.5	2.82	165
100	—	—	—	5×11	3.98	105	5×11	3.32	115	6.3×11	2.65	141	6.3×11	2.32	151	8×11.5	1.99	190	10×12.5	1.66	215	10×20	1.33	265
220	5×11	2.11	140	6.3×11	1.81	166	6.3×11	1.51	190	8×11.5	1.21	247	10×12.5	1.06	314	10×12.5	0.91	314	10×16	0.75	335	12.5×25	0.60	440
330	6.3×11	1.41	195	6.3×11	1.21	210	8×11.5	1.01	271	10×12.5	0.81	360	10×12.5	0.70	384	10×16	0.60	421	10×20	0.50	510	12.5×25	0.40	540
470	6.3×11	0.99	232	8×11.5	0.85	325	8×11.5	0.71	323	10×12.5	0.57	429	10×16	0.50	470	12.5×20	0.42	628	12.5×20	0.35	640	16×25	0.28	715
1000	8×11.5	0.47	398	10×12.5	0.40	457	10×16	0.33	560	10×20	0.27	705	12.5×20	0.23	857	12.5×25	0.20	1000	16×25	0.17	930	18×40	0.13	985
2200	10×20	0.23	720	10×20	0.20	761	12.5×20	0.17	961	12.5×25	0.14	1180	16×25	0.12	1380	16×35.5	0.11	1660	—	—	—	—	—	—
3300	10×20	0.16	882	12.5×20	0.14	1010	12.5×25	0.12	1200	16×25	0.10	1440	16×35.5	0.09	1780	18×35.5	0.08	1990	—	—	—	—	—	—
4700	12.5×20	0.12	1120	12.5×25	0.11	1250	16×25	0.09	1490	16×31.5	0.08	1880	18×35.5	0.07	2120	—	—	—	—	—	—	—	—	—
6800	12.5×25	0.09	1380	16×25	0.08	1570	16×35.5	0.07	1830	18×35.5	0.06	2330	—	—	—	—	—	—	—	—	—	—	—	—
10000	16×25	0.08	1750	16×35.5	0.07	1910	18×35.5	0.06	2220	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
15000	16×35.5	0.06	2040	18×35.5	0.06	2190	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
22000	18×40	0.05	2390	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Rated voltage (V) / Item / Rated capacitance (μF)	160			200			250			315			350			400			450		
	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)
1	6.3×11	332	16	6.3×11	332	16	6.3×11	332	16	6.3×11	398	16	6.3×11	398	16	6.3×11	398	16	8×11.5	398	18
2.2	6.3×11	151	23	6.3×11	151	23	6.3×11	151	23	8×11.5	181	27	8×11.5	181	27	8×11.5	181	27	10×12.5	181	31
3.3	6.3×11	101	28	6.3×11	101	28	8×11.5	101	34	10×12.5	121	38	10×12.5	121	38	10×12.5	121	38	10×16	121	42
4.7	6.3×11	70.6	34	8×11.5	70.6	40	8×11.5	70.6	40	10×12.5	84.7	45	10×12.5	84.7	45	10×16	84.7	50	10×20	84.7	54
10	8×11.5	33.2	58	10×12.5	33.2	66	10×16	33.2	74	10×20	39.8	79	10×20	39.8	79	12.5×20	39.8	87	12.5×20	39.8	87
22	10×16	15.1	107	10×20	15.1	120	12.5×20	15.1	130	12.5×20	18.1	129	12.5×25	18.1	140	12.5×25	18.1	140	16×25	18.1	160
33	10×20	10.1	143	12.5×20	10.1	160	12.5×25	10.1	172	16×25	12.1	196	16×25	12.1	196	16×25	12.1	196	16×31.5	12.1	215
47	12.5×20	7.06	188	12.5×20	7.06	188	12.5×25	7.06	205	16×25	8.47	234	16×25	8.47	234	16×31.5	8.47	256	16×35.5	8.47	269
100	12.5×25	3.32	299	16×25	3.32	342	16×31.5	3.32	374	18×31.5	3.98	401	18×31.5	3.98	401	—	—	—	—	—	—
220	16×31.5	1.51	554	18×35.5	1.51	624	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
330	18×35.5	1.01	764	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105℃, 120Hz ; ESR. : 20℃, 120Hz

RJ3 MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

105°C Use, Standard Capacitors

GREEN CAP | 105°C 2000hours | Anti-cleaning solvent 250V Max.

• Guarantees 2000 hours at 105℃ (φ5 to φ8 : 1000 hours).

Miniaturized ⇦ High temperature

RJ4 ⇦ RJ3 ⇦ RE2

Marking color : White print on a black sleeve

Specifications

Item	Performance	
Category temperature range (℃)	−55 to +105	−40 to +105
Rated voltage (V)	6.3 to 100	160 to 400
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)	
Leakage current (μA) (max.)	0.03CV or 4 whichever is larger (after 1 minute) 0.01CV or 3 whichever is larger (after 2 minutes)	CV ≦ 1000 : 0.1CV+40 (after 1 minute) CV ＞ 1000 : 0.04CV+100 (after 1 minute)
	C : Rated capacitance (μF) ; V : Rated voltage (V) (20°C)	

Tangent of loss angle (tanδ)

Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	315	350	400
tanδ (max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08	0.15	0.15	0.15	0.20	0.20	0.20

0.02 is added to every 1000μF increase over 1000μF. (20°C,120Hz)

Characteristics at high and low temperature

Rated voltage (V)		6.3	10	16	25	35	50	63	100	160 to 250	315 to 400
Impedance ratio (max.)	Z−25℃/Z+20℃	4	3	2	2	2	2	2	2	3	3
	Z−40℃/Z+20℃	—	—	—	—	—	—	—	—	8	6
	Z−55℃/Z+20℃	8	6	4	3	3	3	3	3	—	—

(120Hz)

Endurance (105℃) (Applied ripple current)

Test time	2000 hours (φ5 to φ8 : 1000 hours)
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	200% or less of the initial specified value

Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

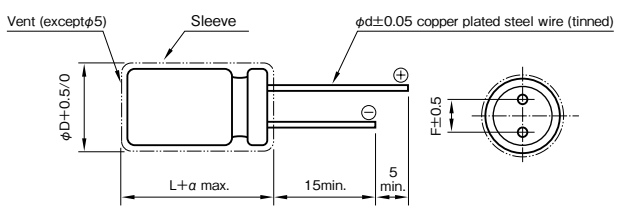

φD	5	6.3	8	10	12.5	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
α	2.0		1.5	2.0	2.5		

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Rated capacitance (μF) \ Frequency (Hz)	50・60	120	1k	10k	100k
6.3 to 100	1 to 4.7	—	0.4	0.7	0.8	1
	10 to 47	—	0.5	0.8	0.9	1
	100 to 220	—	0.7	0.9	0.9	1
	330 to 1000	—	0.8	0.9	1.0	1
	2200 to 15000	—	0.9	1.0	1.0	1
160 to 400	1 to 220	0.8	1	1.3	1.4	1.6

Part numbering system (example : 63V1000μF)

RJ3	—	63	V	102	M	J7	#	⬚	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol		Taping(Forming) symbol

Casing symbol

Size φD×L (mm)	Casing Symbol	Size φD×L (mm)	Casing Symbol
5×11	E3	12.5×25	I6
6.3×11	F3	16×25	J6
8×11.5	G3	16×31.5	J7
10×12.5	H3	16×35.5	J8
10×16	H4	18×35.5	K8
10×20	H5	18×40	K9
12.5×20	I5		

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated Capacitance (μF)	6.3				10				16				25			
	Case φD×L (mm)	ESR (Ω)	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Impedance (Ω max.)	Rated ripple current (mArms)
4.7	—	—	—	—	—	—	—	—	—	—	—	—	5×11	49.4	3.0	85
10	—	—	—	—	—	—	—	—	5×11	26.5	2.5	92	5×11	23.2	2.5	92
22	—	—	—	—	5×11	14.3	2.5	92	5×11	12.1	1.9	105	5×11	10.6	1.9	105
33	5×11	11.1	2.5	105	5×11	9.55	1.9	105	5×11	8.04	1.5	120	5×11	7.04	1.5	120
47	5×11	7.77	1.5	120	5×11	6.71	1.5	120	5×11	5.65	1.2	130	5×11	4.94	1.2	130
100	5×11	3.65	1.2	130	5×11	3.15	1.2	130	6.3×11	2.65	0.58	220	6.3×11	2.32	0.58	220
220	6.3×11	1.66	0.87	180	6.3×11	1.43	0.58	220	8×11.5	1.21	0.47	290	8×11.5	1.06	0.39	315
330	6.3×11	1.11	0.58	220	8×11.5	0.96	0.47	265	8×11.5	0.81	0.39	315	10×12.5	0.70	0.23	500
470	8×11.5	0.78	0.39	315	8×11.5	0.67	0.39	315	10×12.5	0.57	0.23	500	10×16	0.50	0.18	615
1000	10×12.5	0.37	0.23	500	10×16	0.32	0.18	615	10×20	0.27	0.12	825	12.5×20	0.23	0.090	1050
2200	12.5×20	0.18	0.095	1000	12.5×20	0.16	0.090	1050	12.5×25	0.14	0.068	1300	16×25	0.12	0.056	1740
3300	12.5×20	0.13	0.090	1050	12.5×25	0.12	0.068	1300	16×25	0.10	0.056	1740	16×31.5	0.09	0.045	2110
4700	16×25	0.10	0.061	1670	16×25	0.09	0.056	1740	16×31.5	0.08	0.045	2110	18×35.5	0.07	0.036	2580
6800	16×25	0.08	0.056	1740	16×31.5	0.07	0.045	2110	18×35.5	0.06	0.036	2580	—	—	—	—
10000	16×31.5	0.06	0.045	2110	18×35.5	0.06	0.036	2580	—	—	—	—	—	—	—	—
15000	18×35.5	0.05	0.036	2580	—	—	—	—	—	—	—	—	—	—	—	—

Rated voltage (V) / Item / Rated Capacitance (μF)	35				50				63				100			
	Case φD×L (mm)	ESR (Ω)	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Impedance (Ω max.)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Impedance (Ω max.)	Rated ripple current (mArms)
1	—	—	—	—	5×11	166	4.9	35	—	—	—	—	5×11	133	11	45
2.2	—	—	—	—	5×11	75.4	4.2	53	—	—	—	—	5×11	60.3	9.2	60
3.3	—	—	—	—	5×11	50.3	3.9	65	—	—	—	—	5×11	40.2	7.2	67
4.7	5×11	42.4	2.5	92	5×11	35.3	3.6	82	5×11	31.8	5.8	74	5×11	28.2	6.3	75
10	5×11	19.9	1.9	105	5×11	16.6	2.7	100	5×11	14.9	3.6	95	6.3×11	13.3	3.3	110
22	5×11	9.05	1.5	120	5×11	7.54	1.9	125	6.3×11	6.79	2.1	130	8×11.5	6.03	1.4	165
33	5×11	6.03	1.2	130	6.3×11	5.03	1.1	195	6.3×11	4.52	1.7	160	10×12.5	4.02	0.94	305
47	6.3×11	4.24	0.58	220	6.3×11	3.53	0.90	245	8×11.5	3.18	1.2	305	10×16	2.82	0.68	320
100	8×11.5	1.99	0.39	315	8×11.5	1.66	0.50	385	10×12.5	1.49	0.65	395	12.5×20	1.33	0.28	585
220	10×12.5	0.91	0.23	500	10×16	0.75	0.27	505	10×20	0.68	0.32	505	16×25	0.60	0.16	1120
330	10×16	0.60	0.18	615	10×20	0.50	0.18	675	12.5×20	0.45	0.22	660	16×25	0.40	0.13	1290
470	10×20	0.42	0.12	825	12.5×20	0.35	0.12	895	12.5×25	0.32	0.16	850	16×31.5	0.28	0.11	1350
1000	12.5×25	0.20	0.068	1300	16×25	0.17	0.076	1495	16×31.5	0.15	0.098	1430	—	—	—	—
2200	16×31.5	0.11	0.045	2110	18×35.5	0.09	0.050	2190	—	—	—	—	—	—	—	—
3300	18×35.5	0.08	0.036	2580	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105°C, 100kHz ; ESR. : 20°C, 120Hz ; Impedance : 20°C, 100kHz

Rated voltage (V) / Item / Rated Capacitance (μF)	160			200			250			315			350			400		
	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)	Case φD×L (mm)	ESR (Ω)	Rated ripple current (mArms)
1	6.3×11	248	18	6.3×11	248	18	6.3×11	248	18	6.3×11	331	16	6.3×11	331	18	8×11.5	331	18
2.2	6.3×11	113	26	6.3×11	113	26	8×11.5	113	30	8×11.5	150	27	8×11.5	150	30	10×12.5	150	30
3.3	8×11.5	75.4	37	8×11.5	75.4	37	10×12.5	75.4	43	10×12.5	100	36	10×12.5	100	36	10×16	100	40
4.7	8×11.5	52.9	44	10×12.5	52.9	50	10×12.5	52.9	50	10×16	70.6	47	10×16	70.6	47	10×20	70.6	52
10	10×12.5	24.9	75	10×16	24.9	80	10×20	24.9	90	10×20	33.2	75	12.5×20	33.2	79	12.5×20	33.2	79
22	10×20	11.3	135	10×20	11.3	135	12.5×25	11.3	155	12.5×25	15.1	130	12.5×25	15.1	130	16×25	15.1	130
33	12.5×20	7.54	175	12.5×25	7.54	190	12.5×25	7.54	190	16×25	10.1	160	16×25	10.1	160	16×31.5	10.1	175
47	12.5×25	5.29	230	12.5×25	5.29	230	16×25	5.29	225	16×31.5	7.06	210	16×31.5	7.06	210	18×35.5	7.06	220
100	16×25	2.49	330	16×31.5	2.49	360	18×35.5	2.49	340	18×40	3.32	335	18×40	3.32	335	—	—	—
220	18×35.5	1.13	500	18×40	1.13	525	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105°C, 120Hz ; ESR. : 20°C, 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

RJB MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

105°C Use, Miniature, High-Reliability, Low Impedance Capacitors

GREEN CAP | Low Impedance | 105°C 5000hours | Anti-cleaning solvent

- Smaller and higher ripple current than RJH Series.
- Guarantees 5000 hours at 105°C.
  (φ 5 to 6.3 : 2000 hours ; φ 8 to 10 : 3000 hours)

Miniaturized

RJB ⇦ RJH

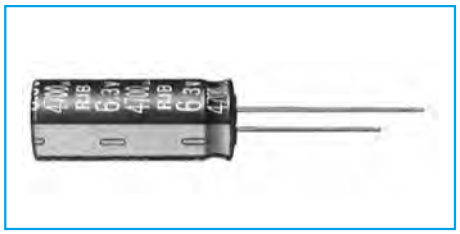

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV + 1 (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	
Characteristics at high and low temperature	
Endurance (105℃) (Applied ripple current)	
Shelf life (105℃)	
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Tangent of loss angle (tanδ)

Rated voltage (V)	6.3	10	16	25	35	50	63	100
tanδ (max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08

0.02 is added to every 1000μF increase over 1000μF. (20℃,120Hz)

Characteristics at high and low temperature

Rated voltage (V)		6.3	10	16	25	35	50	63	100
Impedance ratio (max.)	Z−55℃/Z+20℃	3	3	3	3	3	3	3	3

(120Hz)

Endurance (105℃) (Applied ripple current)

Test time	5000 hours (φ5 to 6.3 : 2000 hours) (φ8 to 10 : 3000 hours)
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	200% or less of the initial specified value

Shelf life (105℃)

Test time	1000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±15% of initial value
Tangent of the loss angle	150% or less of the initial specified value

Voltage application treatment : According to JIS C5101-4 4.1

Outline Drawing

Unit : mm

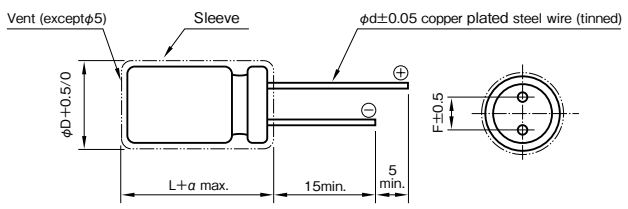

φD	5	6.3	8	10	12.5	16
F	2.0	2.5	3.5	5.0	5.0	7.5
φd	0.5	0.5	0.6	0.6	0.6	0.8
α	1.0	1.0	1.0	2.0	2.0	2.0

Coefficient of Frequency for Rated Ripple Current

Rated capacitance (μF) \ Frequency (Hz)	120	1k	10k	100k
3.3 to 180	0.40	0.75	0.90	1
220 to 390	0.50	0.85	0.95	1
470 to 1800	0.60	0.88	0.96	1
2200 to 3900	0.75	0.90	0.98	1
4700 to 10000	0.85	0.95	1.00	1

Part numbering system (example : 10V1000μF)

RJB	—	10	V	102	M	H4	# —	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping(Forming) symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3					10					16				
	Case φD×L (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) −10℃	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) −10℃	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) −10℃	Rated ripple current (mArms)
100	—	—	—	—	—	5×11.5	E3	0.65	1.3	181	—	—	—	—	—
220	—	—	—	—	—	6.3×11.5	F3	0.32	0.64	290	—	—	—	—	—
330	6.3×11.5	F3	0.32	0.64	290	8×12	G3	0.17	0.34	555	8×12	G3	0.17	0.34	555
470	8×12	G3	0.17	0.34	555	8×12	G3	0.17	0.34	555	10×12.5	H3	0.12	0.24	760
680	8×12	G3	0.17	0.34	555	10×12.5	H3	0.12	0.24	760	10×16	H4	0.080	0.16	1050
1000	10×12.5	H3	0.12	0.24	760	10×16	H4	0.080	0.16	1050	10×20	H5	0.062	0.124	1220
2200	10×25	H6	0.052	0.104	1440	12.5×20	I5	0.042	0.084	1690	12.5×25	I6	0.034	0.068	1950
3300	12.5×20	I5	0.042	0.084	1690	12.5×25	I6	0.034	0.068	1950	16×25	J6	0.028	0.056	2560
4700	12.5×30	I7	0.030	0.060	2310	16×25	J6	0.028	0.056	2560	16×31.5	J7	0.025	0.050	3010
6800	16×25	J6	0.028	0.056	2560	16×31.5	J7	0.025	0.050	3010	—	—	—	—	—
10000	16×31.5	J7	0.025	0.050	3010	—	—	—	—	—	—	—	—	—	—

Rated voltage (V) / Item / Rated capacitance (μF)	25					35					50				
	Case φD×L (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) −10℃	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) −10℃	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) −10℃	Rated ripple current (mArms)
22	—	—	—	—	—	—	—	—	—	—	5×11.5	E3	0.95	1.9	170
33	—	—	—	—	—	5×11.5	E3	0.65	1.3	181	6.3×11.5	F3	0.46	0.92	260
47	5×11.5	E3	0.65	1.3	181	6.3×11.5	F3	0.32	0.64	290	6.3×11.5	F3	0.46	0.92	260
100	6.3×11.5	F3	0.32	0.64	290	8×12	G3	0.17	0.34	555	8×12	G3	0.21	0.42	485
150	—	—	—	—	—	—	—	—	—	—	10×12.5	H3	0.19	0.38	615
220	8×12	G3	0.17	0.34	555	10×12.5	H3	0.12	0.24	760	10×16	H4	0.16	0.32	850
330	10×12.5	H3	0.12	0.24	760	10×16	H4	0.080	0.16	1050	10×20	H5	0.085	0.17	1050
470	10×16	H4	0.080	0.16	1050	10×20	H5	0.062	0.124	1220	12.5×20	I5	0.060	0.12	1500
680	10×20	H5	0.062	0.124	1220	12.5×20	I5	0.042	0.084	1690	12.5×25	I6	0.045	0.090	1832
1000	12.5×20	I5	0.042	0.084	1690	12.5×25	I6	0.034	0.068	1950	16×25	J6	0.038	0.076	2240
2200	16×25	J6	0.028	0.056	2560	16×31.5	J7	0.025	0.050	3010	—	—	—	—	—
3300	16×31.5	J7	0.025	0.050	3010	—	—	—	—	—	—	—	—	—	—

Rated voltage (V) / Item / Rated capacitance (μF)	63					100				
	Case φD×L (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) −10℃	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) −10℃	Rated ripple current (mArms)
3.3	—	—	—	—	—	5×11.5	E3	1.9	7.6	57
4.7	5×11.5	E3	1.2	3.6	120	5×11.5	E3	1.9	7.6	57
10	5×11.5	E3	1.2	3.6	120	6.3×11.5	F3	1.1	4.4	78
22	6.3×11.5	F3	0.55	1.7	148	8×12	G3	0.53	2.1	275
33	6.3×11.5	F3	0.55	1.7	148	10×12.5	H3	0.47	1.9	319
47	8×12	G3	0.32	0.96	360	10×16	H4	0.32	1.3	424
100	10×12.5	H3	0.23	0.69	448	12.5×20	I5	0.13	0.52	805
220	10×20	H5	0.12	0.36	676	16×25	J6	0.081	0.32	1290
330	12.5×20	I5	0.075	0.23	979	16×25	J6	0.081	0.32	1290
470	12.5×25	I6	0.065	0.20	1180	16×31.5	J7	0.059	0.23	1630
1000	16×31.5	J7	0.042	0.13	1890	—	—	—	—	—

(Note) Rated ripple current : 105℃, 100kHz ; Impedance : 100kHz

105°C Use, High-Reliability, Low Impedance Capacitors

GREEN CAP | Low Impedance | 105°C 5000hours | Anti-cleaning solvent

- Guarantees 5000 hours at 105℃.
  (φ5 to 6.3 : 2000 hours ; φ8 to 10 : 3000 hours)

Long life

RJH ⇦ RJ3

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV + 2 (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)

Tangent of loss angle (tanδ)

Rated voltage (V)	6.3	10	16	25	35	50	63	100
tanδ (max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.08	0.07

0.02 is added to every 1000μF increase over 1000μF. (20℃,120Hz)

Characteristics at high and low temperature

Rated voltage (V)		6.3	10	16	25	35	50	63	100
Impedance ratio (max.)	Z−25℃/Z+20℃	2	2	2	2	2	2	2	2
	Z−55℃/Z+20℃	3	3	3	3	3	3	3	3

(120Hz)

Endurance (105℃) (Applied ripple current)

Test time	5000 hours (φ5 to 6.3 : 2000 hours) (φ8 to 10 : 3000 hours)
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	200% or less of the initial specified value

Shelf life (105℃)

Test time	1000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±15% of initial value
Tangent of the loss angle	150% or less of the initial specified value

Voltage application treatment : According to JIS C5101-4 4.1

Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

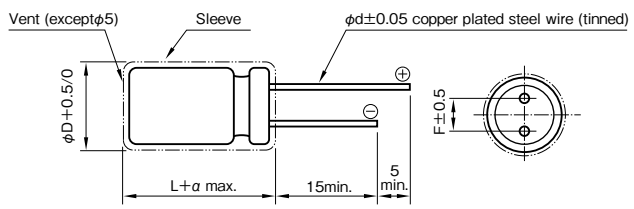

φD	5	6.3	8	10	12.5	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
α	1.0	1.0	1.0	2.0	2.0	2.0	2.0

Coefficient of Frequency for Rated Ripple Current

Rated capacitance (μF) \ Frequency (Hz)	120	1k	10k	100k
1 to 4.7	0.40	0.68	0.78	1
5.6 to 47	0.50	0.76	0.87	1
56 to 270	0.70	0.85	0.90	1
330 to 1000	0.80	0.93	0.98	1
1200 to 15000	0.90	0.95	1.00	1

Part numbering system (example : 10V5600μF)

RJH	—	10	V	562	M	J7	# —	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping(Forming) symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Case φD×L (mm) / Casing symbol		6.3					10				
		Rated capacitance (μF)	ESR (Ω)	Impedance (Ω max.) 20℃	Impedance (Ω max.) −10℃	Rated ripple current (mArms)	Rated capacitance (μF)	ESR (Ω)	Impedance (Ω max.) 20℃	Impedance (Ω max.) −10℃	Rated ripple current (mArms)
5×11.5	E3	100	3.65	0.65	1.46	175	82	3.84	0.65	1.46	175
6.3×11.5	F3	220	1.66	0.31	0.70	290	180	1.75	0.31	0.70	290
8×12	G3	470	0.777	0.17	0.38	488	330	0.956	0.17	0.38	488
8×15	G4	680	0.537	0.13	0.29	617	470	0.671	0.13	0.29	617
8×20	G5	1000	0.365	0.095	0.21	800	680	0.464	0.095	0.21	800
10×12.5	H3	680	0.537	0.10	0.23	625	470	0.671	0.10	0.23	625
10×16	H4	820	0.446	0.080	0.18	825	560	0.563	0.080	0.18	825
10×20	H5	1200	0.305	0.062	0.14	1010	1000	0.316	0.062	0.14	1010
10×25	H6	1500	0.244	0.052	0.12	1190	1200	0.263	0.052	0.12	1190
10×30	H7	2200	0.181	0.044	0.099	1440	1500	0.211	0.044	0.099	1440
12.5×15	I4	• 1200	0.305	0.062	0.14	1010	• 1000	0.316	0.062	0.14	1010
12.5×20	I5	2200	0.181	0.042	0.095	1400	1800	0.176	0.042	0.095	1400
12.5×25	I6	2700	0.148	0.034	0.076	1690	2200	0.159	0.034	0.076	1690
12.5×30	I7	3900	0.111	0.030	0.068	1950	2700	0.130	0.030	0.068	1950
12.5×35	I8	4700	0.099	0.024	0.054	2220	3300	0.116	0.024	0.054	2220
12.5×40	I9	5600	0.089	0.021	0.047	2390	3900	0.098	0.021	0.047	2390
16×16	J4	• 2700	0.148	0.046	0.10	1310	• 1800	0.176	0.046	0.10	1310
16×20	J5	• 4700	0.099	0.034	0.077	1660	• 3300	0.116	0.034	0.077	1660
16×25	J6	5600	0.089	0.028	0.063	2070	3900	0.098	0.028	0.063	2070
16×31.5	J7	6800	0.079	0.025	0.056	2350	5600	0.080	0.025	0.056	2350
16×35.5	J8	8200	0.073	0.022	0.050	2550	6800	0.071	0.022	0.050	2550
16×40	J9	12000	0.059	0.018	0.041	2970	8200	0.067	0.018	0.041	2970
18×16	K4	• 3300	0.131	0.043	0.097	1460	• 2200	0.159	0.043	0.097	1460
18×20	K5	• 5600	0.089	0.030	0.068	1850	• 3900	0.098	0.030	0.068	1850
18×25	K6	• 6800	0.079	0.027	0.061	2120	• 4700	0.089	0.027	0.061	2120
18×31.5	K7	10000	0.064	0.023	0.052	2410	6800	0.071	0.023	0.052	2410
18×35.5	K8	12000	0.059	0.019	0.043	2680	8200	0.067	0.019	0.043	2680
18×40	K9	15000	0.054	0.017	0.038	3010	10000	0.059	0.017	0.038	3010

Rated voltage (V) / Item / Case φD×L (mm) / Casing symbol		16					25				
		Rated capacitance (μF)	ESR (Ω)	Impedance (Ω max.) 20℃	Impedance (Ω max.) −10℃	Rated ripple current (mArms)	Rated capacitance (μF)	ESR (Ω)	Impedance (Ω max.) 20℃	Impedance (Ω max.) −10℃	Rated ripple current (mArms)
5×11.5	E3	56	4.74	0.65	1.46	175	39	5.96	0.65	1.46	175
6.3×11.5	F3	120	2.21	0.31	0.70	290	82	2.83	0.31	0.70	290
8×12	G3	270	0.983	0.17	0.38	488	180	1.29	0.17	0.38	488
8×15	G4	330	0.805	0.13	0.29	617	220	1.06	0.13	0.29	617
8×20	G5	470	0.565	0.095	0.21	800	330	0.704	0.095	0.21	800
10×12.5	H3	330	0.805	0.10	0.23	625	220	1.06	0.10	0.23	625
10×16	H4	390	0.681	0.080	0.18	825	270	0.861	0.080	0.18	825
10×20	H5	680	0.391	0.062	0.14	1010	470	0.495	0.062	0.14	1010
10×25	H6	820	0.324	0.052	0.12	1190	560	0.415	0.052	0.12	1190
10×30	H7	1200	0.222	0.044	0.099	1440	820	0.284	0.044	0.099	1440
12.5×15	I4	• 680	0.391	0.062	0.14	1010	• 470	0.495	0.062	0.14	1010
12.5×20	I5	1200	0.222	0.042	0.095	1400	820	0.284	0.042	0.095	1400
12.5×25	I6	1500	0.177	0.034	0.076	1690	1000	0.233	0.034	0.076	1690
12.5×30	I7	2200	0.136	0.030	0.068	1950	1500	0.155	0.030	0.068	1950
12.5×35	I8	2700	0.111	0.024	0.054	2220	1800	0.130	0.024	0.054	2220
12.5×40	I9	3300	0.101	0.021	0.047	2390	2200	0.121	0.021	0.047	2390
16×16	J4	• 1500	0.177	0.046	0.10	1310	• 820	0.284	0.046	0.10	1310
16×20	J5	• 2200	0.136	0.034	0.077	1660	• 1500	0.155	0.034	0.077	1660
16×25	J6	2700	0.111	0.028	0.063	2070	1800	0.130	0.028	0.063	2070
16×31.5	J7	3900	0.086	0.025	0.056	2350	2700	0.099	0.025	0.056	2350
16×35.5	J8	4700	0.078	0.022	0.050	2550	3300	0.091	0.022	0.050	2550
16×40	J9	5600	0.072	0.018	0.041	2970	3900	0.077	0.018	0.041	2970
18×16	K4	• 1500	0.177	0.043	0.097	1460	• 1200	0.194	0.043	0.097	1460
18×20	K5	• 2700	0.111	0.030	0.068	1850	• 1800	0.130	0.030	0.068	1850
18×25	K6	• 3900	0.086	0.027	0.061	2120	• 2700	0.099	0.027	0.061	2120
18×31.5	K7	4700	0.078	0.023	0.052	2410	3300	0.091	0.023	0.052	2410
18×35.5	K8	6800	0.064	0.019	0.043	2680	3900	0.077	0.019	0.043	2680
18×40	K9	8200	0.061	0.017	0.038	3010	4700	0.071	0.017	0.038	3010

(Note) Rated ripple current : 105℃, 100kHz ; ESR. : 20℃, 120Hz ; Impedance : 100kHz
• : The black circles in the capacitance column denote semi-standard products.

• The standard ratings follow the next page.

Standard Ratings

Case φD×L (mm)	Casing symbol	35 Rated capacitance (μF)	35 ESR (Ω)	35 Impedance (Ω max.) 20℃	35 Impedance (Ω max.) −10℃	35 Rated ripple current (mArms)	50 Rated capacitance (μF)	50 ESR (Ω)	50 Impedance (Ω max.) 20℃	50 Impedance (Ω max.) −10℃	50 Rated ripple current (mArms)
5×11.5	E3	—	—	—	—	—	1	166	3.5	7.0	36
5×11.5	E3	—	—	—	—	—	2.2	75.4	3.0	6.0	54
5×11.5	E3	—	—	—	—	—	3.3	50.3	2.6	5.2	63
5×11.5	E3	—	—	—	—	—	4.7	35.3	2.2	4.4	75
5×11.5	E3	—	—	—	—	—	10	16.6	1.4	2.8	110
5×11.5	E3	27	7.37	0.65	1.46	175	18	9.22	0.95	1.9	120
6.3×11.5	F3	56	3.56	0.31	0.70	290	39	4.25	0.43	0.86	148
8×12	G3	120	1.66	0.17	0.38	488	68	2.44	0.20	0.40	360
8×15	G4	180	1.11	0.13	0.29	617	82	2.02	0.18	0.36	460
8×20	G5	220	0.905	0.095	0.21	800	120	1.38	0.13	0.26	670
10×12.5	H3	150	1.33	0.10	0.23	625	82	2.02	0.18	0.36	443
10×16	H4	180	1.11	0.080	0.18	825	100	1.66	0.15	0.30	553
10×20	H5	330	0.604	0.062	0.14	1010	180	0.922	0.085	0.17	676
10×25	H6	390	0.511	0.052	0.12	1190	220	0.754	0.075	0.15	876
10×30	H7	560	0.356	0.044	0.099	1440	330	0.503	0.055	0.11	1010
12.5×15	I4	• 330	0.604	0.062	0.140	1010	• 180	0.922	0.095	0.19	745
12.5×20	I5	560	0.356	0.042	0.095	1400	330	0.503	0.060	0.12	979
12.5×25	I6	680	0.293	0.034	0.076	1690	470	0.353	0.044	0.088	1180
12.5×30	I7	1000	0.200	0.030	0.068	1950	560	0.297	0.040	0.080	1310
12.5×35	I8	1200	0.166	0.024	0.054	2220	680	0.244	0.036	0.072	1470
12.5×40	I9	1500	0.133	0.021	0.047	2390	820	0.203	0.034	0.068	1590
16×16	J4	• 560	0.356	0.046	0.10	1310	• 330	0.503	0.065	0.13	982
16×20	J5	• 1000	0.200	0.034	0.077	1660	• 680	0.244	0.045	0.090	1210
16×25	J6	1200	0.166	0.028	0.063	2070	820	0.203	0.038	0.076	1490
16×31.5	J7	1800	0.111	0.025	0.056	2350	1000	0.166	0.032	0.064	1890
16×35.5	J8	2200	0.106	0.022	0.050	2550	1200	0.139	0.028	0.056	2140
16×40	J9	2700	0.087	0.018	0.041	2970	1500	0.111	0.026	0.052	2410
18×16	K4	• 680	0.293	0.043	0.097	1460	• 470	0.353	0.048	0.096	1180
18×20	K5	• 1200	0.166	0.030	0.068	1850	• 820	0.203	0.036	0.072	1450
18×25	K6	• 1800	0.111	0.027	0.061	2120	• 1000	0.166	0.032	0.064	1720
18×31.5	K7	2200	0.106	0.023	0.052	2410	1500	0.111	0.026	0.052	1970
18×35.5	K8	2700	0.087	0.019	0.043	2680	1800	0.074	0.025	0.050	2310
18×40	K9	3300	0.081	0.017	0.038	3010	2200	0.073	0.024	0.048	2530

Case φD×L (mm)	Casing symbol	63 Rated capacitance (μF)	63 ESR (Ω)	63 Impedance (Ω max.) 20℃	63 Impedance (Ω max.) −10℃	63 Rated ripple current (mArms)	100 Rated capacitance (μF)	100 ESR (Ω)	100 Impedance (Ω max.) 20℃	100 Impedance (Ω max.) −10℃	100 Rated ripple current (mArms)
5×11.5	E3	12	11.1	1.2	3.6	120	5.6	20.7	1.9	7.6	57
6.3×11.5	F3	27	4.92	0.55	1.7	148	12	9.68	1.1	4.4	78
8×12	G3	47	2.82	0.32	0.96	360	22	5.28	0.53	2.1	275
8×15	G4	68	1.95	0.24	0.72	469	33	3.52	0.35	1.4	360
8×20	G5	82	1.62	0.17	0.51	682	39	2.98	0.27	1.1	490
10×12.5	H3	56	2.37	0.23	0.69	448	27	4.30	0.47	1.9	319
10×16	H4	68	1.95	0.17	0.51	553	33	3.52	0.32	1.3	424
10×20	H5	120	1.11	0.12	0.36	676	56	2.07	0.25	1.0	499
10×25	H6	150	0.885	0.10	0.30	876	68	1.71	0.18	0.72	634
10×30	H7	180	0.738	0.085	0.26	1020	100	1.16	0.15	0.60	739
12.5×15	I4	• 150	0.885	0.11	0.33	745	• 68	1.71	0.20	0.80	613
12.5×20	I5	220	0.604	0.075	0.23	979	100	1.16	0.13	0.52	805
12.5×25	I6	270	0.492	0.065	0.20	1180	120	0.968	0.11	0.44	857
12.5×30	I7	390	0.341	0.055	0.17	1310	180	0.646	0.090	0.36	1120
12.5×35	I8	470	0.283	0.048	0.14	1470	220	0.528	0.075	0.30	1240
12.5×40	I9	560	0.237	0.042	0.13	1590	270	0.431	0.060	0.24	1330
16×16	J4	• 220	0.604	0.080	0.24	982	• 120	0.968	0.13	0.52	706
16×20	J5	• 390	0.341	0.057	0.17	1210	• 180	0.646	0.11	0.44	916
16×25	J6	470	0.283	0.052	0.16	1490	220	0.528	0.081	0.32	1290
16×31.5	J7	680	0.196	0.042	0.13	1890	330	0.352	0.059	0.23	1630
16×35.5	J8	820	0.162	0.036	0.11	2140	390	0.298	0.052	0.21	1750
16×40	J9	1000	0.133	0.032	0.096	2410	470	0.248	0.045	0.18	1920
18×16	K4	• 330	0.403	0.065	0.20	1200	• 150	0.775	0.12	0.48	871
18×20	K5	• 560	0.237	0.058	0.17	1460	• 270	0.431	0.085	0.34	1170
18×25	K6	• 680	0.196	0.050	0.15	1740	• 330	0.352	0.071	0.28	1500
18×31.5	K7	820	0.162	0.042	0.13	1990	390	0.298	0.058	0.23	1630
18×35.5	K8	1000	0.133	0.035	0.11	2340	560	0.208	0.054	0.22	1920
18×40	K9	1200	0.111	0.032	0.096	2560	680	0.171	0.041	0.16	2100

(Note) Rated ripple current : 105°C, 100kHz ; ESR. : 20°C, 120Hz ; Impedance : 100kHz
• : The black circles in the capacitance column denote semi-standard products.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

105°C Use, Miniature, High-Reliability, Extra Low Impedance Capacitors

GREEN CAP | Low Impedance | 105°C 5000hours | Anti-cleaning solvent

- Higher ripple current and Lower impedance than RJB series.

Low impedance

RJF ⇦ RJB

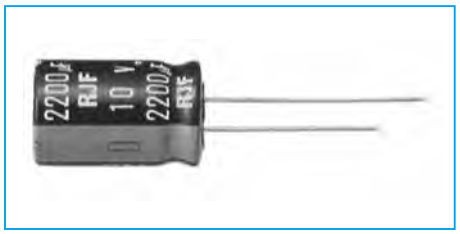

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	

Rated voltage (V)	6.3	10	16	25	35	50	63	80	100
tanδ (max.)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.09	0.08

0.02 is added to every 1000μF increase over 1000μF. (20℃,120Hz)

Characteristics at high and low temperature

Rated voltage (V)		6.3	10	16	25	35	50	63	80	100
Impedance ratio (max.)	Z−25℃/Z+20℃	2	2	2	2	2	2	2	2	2
	Z−40℃/Z+20℃	3	3	3	3	3	3	3	3	3

(120Hz)

Endurance (105℃) (Applied ripple current)

Test time	5L & 7L : 1000 hours φ5 & φ6.3 : 2000 hours (63 to 100WV:5000 hours) φ8 & φ10 : 3000 hours (63 to 100WV:7000 hours) φ12.5 to φ18 : 5000 hours (63 to 100WV:10000 hours)
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±25% of initial value
Tangent of the loss angle	200% or less of the initial specified value

Shelf life (105℃)

Test time	1000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±25% of initial value
Tangent of the loss angle	200% or less of the initial specified value

Voltage application treatment : According to JIS C5101-4 4.1

Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

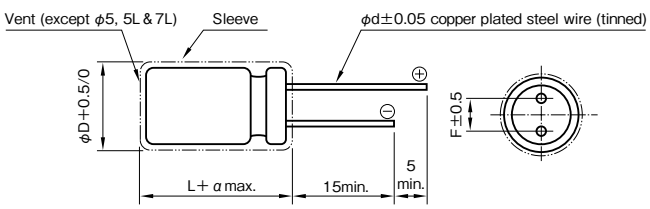

11.5L or more

φD	5	6.3	8	10	12.5	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
α	1.0	1.0	1.0	2.0	2.0	2.0	2.0

5L, 7L

φD	4	5	6.3	8
F	1.5	2.0	2.5	3.5
φd	0.45	0.45	0.45	0.45
α	1.0	1.0	1.0	1.0

Coefficient of Frequency for Rated Ripple Current

Rated capacitance (μF) \ Frequency (Hz)	120	1k	10k	100k
5.6 to 180	0.40	0.75	0.90	1
220 to 390	0.50	0.85	0.94	1
470 to 1800	0.60	0.87	0.95	1
2200 to 3900	0.75	0.90	0.95	1
4700 to 6800	0.85	0.95	0.98	1

Part numbering system (example : 10V1000μF)

RJF	—	10	V	102	M	H4	# —	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping(Forming) symbol

- The standard ratings are described on the next page.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3					10					16				
	Case φD×L (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) −10℃	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) −10℃	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) −10℃	Rated ripple current (mArms)
18	—	—	—	—	—	—	—	—	—	—	4×7	D1	0.92	2.8	130
27	—	—	—	—	—	4×7	D1	0.89	2.7	130	6.3×5	F0	0.30	0.95	210
33	—	—	—	—	—	—	—	—	—	—	5×7	E1	0.45	1.4	210
											6.3×5	F0	0.30	0.95	210
39	4×7	D1	0.85	2.6	130	—	—	—	—	—	—	—	—	—	—
47	—	—	—	—	—	6.3×5	F0	0.29	0.93	210	—	—	—	—	—
56	—	—	—	—	—	5×7	E1	0.44	1.4	210	5×11.5	E3	0.22	0.80	345
68	5×7	E1	0.43	1.3	210	—	—	—	—	—	6.3×7	F1	0.24	0.72	300
100	6.3×5	F0	0.28	0.91	210	5×11.5	E3	0.22	0.8	345	—	—	—	—	—
120	—	—	—	—	—	6.3×7	F1	0.23	0.69	300	8×7	G1	0.15	0.45	380
											6.3×11.5	F3	0.094	0.35	540
150	5×11.5	E3	0.22	0.80	345	—	—	—	—	—	—	—	—	—	—
	6.3×7	F1	0.23	0.69	300										
180	—	—	—	—	—	8×7	G1	0.15	0.45	380	—	—	—	—	—
220	8×7	G1	0.15	0.45	380	6.3×11.5	F3	0.094	0.35	540	—	—	—	—	—
330	6.3×11.5	F3	0.094	0.35	540	—	—	—	—	—	8×12	G3	0.056	0.19	945
470	—	—	—	—	—	8×12	G3	0.056	0.19	945	8×15	G4	0.045	0.15	1250
560	8×12	G3	0.056	0.19	945	—	—	—	—	—	10×16	H4	0.028	0.10	1760
680	—	—	—	—	—	10×12.5	H3	0.039	0.14	1330	—	—	—	—	—
820	8×15	G4	0.045	0.15	1250	—	—	—	—	—	—	—	—	—	—
1000	10×12.5	H3	0.039	0.14	1330	10×16	H4	0.028	0.10	1760	10×20	H5	0.020	0.060	1960
1200	10×16	H4	0.028	0.10	1760	10×20	H5	0.020	0.060	1960	10×25	H6	0.018	0.054	2250
1500	10×20	H5	0.020	0.060	1960	10×25	H6	0.018	0.054	2250	12.5×20	I5	0.017	0.043	2480
2200	10×25	H6	0.018	0.054	2250	12.5×20	I5	0.017	0.043	2480	12.5×25	I6	0.015	0.038	2900
2700	—	—	—	—	—	—	—	—	—	—	16×20	J5	0.015	0.038	3250
3300	12.5×20	I5	0.017	0.043	2480	12.5×25	I6	0.015	0.038	2900	16×25	J6	0.013	0.035	3630
3900	12.5×25	I6	0.015	0.038	2900	16×20	J5	0.015	0.038	3250	16×25	J6	0.013	0.035	3630
4700	12.5×30	I7	0.013	0.033	3450	16×25	J6	0.013	0.035	3630	—	—	—	—	—
5600	16×20	J5	0.015	0.038	3570	16×25	J6	0.013	0.035	3630	—	—	—	—	—
6800	16×25	J6	0.013	0.035	3630	—	—	—	—	—	—	—	—	—	—

Rated voltage (V) / Item / Rated capacitance (μF)	25					35					50				
	Case φD×L (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) −10℃	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) −10℃	Rated ripple current (mArms)	Case φD×L (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) −10℃	Rated ripple current (mArms)
5.6	—	—	—	—	—	—	—	—	—	—	4×7	D1	1.0	3.0	130
10	5×5	E0	0.61	1.5	130	5×5	E0	0.63	1.5	130	5×7	E1	0.50	1.5	210
						4×7	D1	0.96	2.9	130					
15	4×7	D1	0.94	2.9	130	—	—	—	—	—	—	—	—	—	—
18	—	—	—	—	—	5×7	E1	0.47	1.5	210	—	—	—	—	—
22	6.3×5	F0	0.31	0.97	210	6.3×5	F0	0.32	1.0	210	6.3×7	F1	0.26	0.78	300
											5×11.5	E3	0.34	1.18	238
27	5×7	E1	0.46	1.4	210	—	—	—	—	—	—	—	—	—	—
33	—	—	—	—	—	5×11.5	E3	0.22	0.80	345	8×7	G1	0.17	0.51	380
39	—	—	—	—	—	6.3×7	F1	0.25	0.75	300	—	—	—	—	—
47	5×11.5	E3	0.22	0.80	345	—	—	—	—	—	—	—	—	—	—
56	6.3×7	F1	0.24	0.72	300	8×7	G1	0.16	0.48	380	6.3×11.5	F3	0.14	0.50	385
						6.3×11.5	F3	0.094	0.35	540					
100	8×7	G1	0.15	0.45	380	—	—	—	—	—	8×12	G3	0.074	0.22	724
	6.3×11.5	F3	0.094	0.35	540										
120	—	—	—	—	—	—	—	—	—	—	8×15	G4	0.061	0.18	950
150	—	—	—	—	—	8×12	G3	0.056	0.19	945	10×12.5	H3	0.061	0.18	979
180	—	—	—	—	—	—	—	—	—	—	8×20	G5	0.046	0.14	1190
220	8×12	G3	0.056	0.19	945	10×12.5	H3	0.039	0.14	1330	10×16	H4	0.042	0.12	1370
270	—	—	—	—	—	8×20	G5	0.029	0.11	1500	10×20	H5	0.030	0.090	1580
330	10×12.5	H3	0.039	0.14	1330	10×16	H4	0.028	0.10	1760	10×25	H6	0.028	0.085	1870
470	10×16	H4	0.028	0.10	1760	10×20	H5	0.020	0.060	1960	12.5×20	I5	0.027	0.068	2050
560	—	—	—	—	—	10×25	H6	0.018	0.054	2250	12.5×25	I6	0.023	0.059	2410
680	10×20	H5	0.020	0.060	1960	12.5×20	I5	0.017	0.043	2480	16×20	J5	0.023	0.059	2730
820	10×25	H6	0.018	0.054	2250	—	—	—	—	—	16×20	J5	0.023	0.059	2730
1000	12.5×20	I5	0.017	0.043	2480	12.5×25	I6	0.015	0.038	2900	16×25	J6	0.021	0.056	3010
1200	—	—	—	—	—	16×20	J5	0.015	0.038	3250	—	—	—	—	—
1500	12.5×25	I6	0.015	0.038	2900	16×25	J6	0.013	0.035	3630	—	—	—	—	—
1800	16×20	J5	0.015	0.038	3250	16×25	J6	0.013	0.035	3630	—	—	—	—	—
2200	16×25	J6	0.013	0.035	3630	—	—	—	—	—	—	—	—	—	—
2700	16×25	J6	0.013	0.035	3630	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105℃, 100kHz ; Impedance : 100kHz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	63					80					100				
	Case φDxL (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) -10℃	Rated ripple current (mArms)	Case φDxL (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) -10℃	Rated ripple current (mArms)	Case φDxL (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) -10℃	Rated ripple current (mArms)
6.8	–	–	–	–	–	—	–	–	–	–	5 × 11.5	E3	1.4	5.6	125
15	5 × 11.5	E3	0.88	3.5	165	—	–	–	–	–	6.3 × 11.5	F3	0.57	2.3	205
27	–	–	–	–	–	—	–	–	–	–	8 × 12	G3	0.36	1.4	335
33	6.3 × 11.5	F3	0.35	1.4	265	—	–	–	–	–	—	–	–	–	–
39	–	–	–	–	–	—	–	–	–	–	8 × 15	G4	0.25	1.0	450
47	–	–	–	–	–	—	–	–	–	–	10 × 12.5	H3	0.17	0.66	480
56	8 × 12	G3	0.22	0.88	500	—	–	–	–	–	8 × 20	G5	0.19	0.76	565
68	–	–	–	–	–	10 × 12.5	H3	0.17	0.66	480	10 × 16	H4	0.11	0.47	600
82	10 × 12.5	H3	0.11	0.44	690	–	–	–	–	–	10 × 20	H5	0.084	0.34	800
100	–	–	–	–	–	10 × 16	H4	0.11	0.47	600	12.5 × 15	I4	0.11	0.34	750
120	8 × 20	G5	0.12	0.48	820	10 × 20	H5	0.084	0.34	800	10 × 25	H6	0.069	0.28	900
	10 × 16	H4	0.076	0.31	950										
150	–	–	–	–	–	10 × 25	H6	0.069	0.28	900	12.5 × 20	I5	0.062	0.18	1100
180	10 × 20	H5	0.056	0.23	1150	–	–	–	–	–	—	–	–	–	–
220	10 × 25	H6	0.046	0.19	1350	12.5 × 20	I5	0.062	0.18	1100	16 × 20	J5	0.048	0.15	1350
270	12.5 × 20	I5	0.041	0.13	1500	–	–	–	–	–	12.5 × 30	I7	0.042	0.13	1500
330	–	–	–	–	–	12.5 × 25	I6	0.047	0.14	1250	12.5 × 35	I8	0.036	0.11	1650
											16 × 25	J6	0.038	0.12	1700
						16 × 20	J5	0.048	0.15	1350	18 × 20	K5	0.045	0.14	1500
390	12.5 × 25	I6	0.031	0.093	1900	12.5 × 30	I7	0.042	0.13	1500	12.5 × 40	I9	0.032	0.095	1800
470	12.5 × 30	I7	0.028	0.084	2300	12.5 × 35	I8	0.036	0.11	1650	16 × 31.5	J7	0.032	0.095	1850
						16 × 25	J6	0.038	0.12	1700					
	16 × 20	J5	0.032	0.096	2000	18 × 20	K5	0.045	0.14	1500	18 × 25	K6	0.036	0.11	1750
560	12.5 × 35	I8	0.024	0.070	2500	–	–	–	–	–	16 × 35.5	J8	0.029	0.086	2000
											18 × 31.5	K7	0.030	0.090	1900
680	12.5 × 40	I9	0.021	0.063	2800	16 × 31.5	J7	0.032	0.095	1850	16 × 40	J9	0.027	0.081	2480
	16 × 25	J6	0.025	0.075	2600						18 × 35.5	K8	0.027	0.081	2200
	18 × 20	K5	0.030	0.090	2500										
820	16 × 31.5	J7	0.021	0.063	2850	16 × 35.5	J8	0.029	0.086	2000	18 × 40	K9	0.026	0.077	2700
	18 × 25	K6	0.024	0.072	2800	18 × 31.5	K7	0.030	0.090	1900					
1000	16 × 35.5	J8	0.019	0.057	2900	–	–	–	–	–	—	–	–	–	–
1200	16 × 40	J9	0.018	0.054	3400	18 × 40	K9	0.026	0.077	2700	—	–	–	–	–
	18 × 31.5	K7	0.020	0.060	3300										
1500	18 × 35.5	K8	0.018	0.054	3400	—	–	–	–	–	—	–	–	–	–
1800	18 × 40	K9	0.017	0.051	3500	—	–	–	–	–	—	–	–	–	–

(Note) Rated ripple current : 105℃ , 100kHz ; Impedance : 100kHz

RJM MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

105°C Use, Miniature, Long Life, Extra Low Impedance Capacitors

GREEN CAP | Low Impedance | 105°C 10000hours | Anti-cleaning solvent

- Long life than RJF series.
- Guarantees 10000 hours at 105℃.
  (φ5, φ6.3 : 6000 hours, φ8 : 8000 hours)

Long life

RJM ⇦ RJF

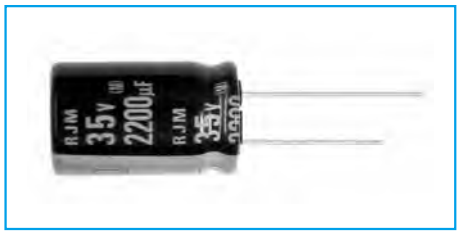

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF), V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 6.3, 10, 16, 25, 35, 50 tanδ (max.): 0.22, 0.19, 0.16, 0.14, 0.12, 0.10 0.02 is added to every 1000μF increase over 1000μF. (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 6.3, 10, 16, 25, 35, 50 Impedance ratio (max.) Z−25℃/Z+20℃: 2, 2, 2, 2, 2, 2 Impedance ratio (max.) Z−40℃/Z+20℃: 3, 3, 3, 3, 3, 3 (120Hz)
Endurance (105℃) (Applied ripple current)	Test time: φ5 & φ6.3 : 6000 hours; φ8 : 8000 hours; φ10 or more : 10000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±25% of initial value (φ6.3 or less : ±30%) Tangent of the loss angle: 200% or less of the initial specified value
Shelf life (105℃)	Test time: 1000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±25% of initial value (φ6.3 or less : ±30%) Tangent of the loss angle: 200% or less of the initial specified value Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

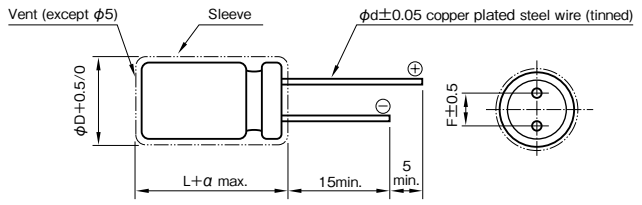

φD	5	6.3	8	10	12.5	16
F	2.0	2.5	3.5	5.0	5.0	7.5
φd	0.5	0.5	0.6	0.6	0.6	0.8
α	1.0	1.0	1.0	2.0	2.0	2.0

Coefficient of Frequency for Rated Ripple Current

Rated capacitance (μF) \ Frequency (Hz)	120	1k	10k	100k
27 to 33	0.42	0.70	0.90	1
39 to 270	0.50	0.73	0.92	1
330 to 680	0.55	0.77	0.94	1
820 to 1800	0.60	0.80	0.96	1
2200 to 8200	0.70	0.85	0.98	1

Part numbering system (example : 10V1000μF)

RJM	—	10	V	102	M	G4	# —	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping(Forming) symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage(V) / Item / Rated capacitance (μF)	6.3					10					16				
	Case φDxL (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) -10℃	Rated ripple current (mArms)	Case φDxL (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) -10℃	Rated ripple current (mArms)	Case φDxL (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) -10℃	Rated ripple current (mArms)
82	—	—	—	—	—	—	—	—	—	—	5×11.5	E3	0.22	0.80	345
100	—	—	—	—	—	5×11.5	E3	0.22	0.80	345	5×11.5	E3	0.22	0.80	345
120	—	—	—	—	—	5×11.5	E3	0.22	0.80	345	—	—	—	—	—
150	5×11.5	E3	0.22	0.80	345	5×11.5	E3	0.22	0.80	345	—	—	—	—	—
180	—	—	—	—	—	—	—	—	—	—	6.3×11.5	F3	0.094	0.35	540
220	5×11.5	E3	0.22	0.80	345	6.3×11.5	F3	0.094	0.35	540	6.3×11.5	F3	0.094	0.35	540
270	—	—	—	—	—	6.3×11.5	F3	0.094	0.35	540	—	—	—	—	—
330	6.3×11.5	F3	0.094	0.35	540	6.3×11.5	F3	0.094	0.35	540	—	—	—	—	—
470	6.3×11.5	F3	0.094	0.35	540	—	—	—	—	—	8×12	G3	0.056	0.19	945
680	—	—	—	—	—	8×12	G3	0.056	0.19	945	8×15	G4	0.045	0.15	1250
											10×12.5	H3	0.039	0.14	1560
820	8×12	G3	0.056	0.19	945	—	—	—	—	—	—	—	—	—	—
1000	—	—	—	—	—	8×15	G4	0.045	0.15	1250	8×20	G5	0.029	0.11	1500
						10×12.5	H3	0.039	0.14	1560	10×16	H4	0.028	0.10	2000
1200	8×15	G4	0.045	0.15	1250	—	—	—	—	—	—	—	—	—	—
	10×12.5	H3	0.039	0.14	1560										
1500	8×20	G5	0.029	0.11	1500	8×20	G5	0.029	0.11	1500	10×20	H5	0.020	0.060	2500
						10×16	H4	0.028	0.10	2000					
1800	10×16	H4	0.028	0.10	2000	10×20	H5	0.020	0.060	2500	10×25	H6	0.017	0.051	2900
2200	10×20	H5	0.020	0.060	2500	10×25	H6	0.017	0.051	2900	12.5×20	I5	0.017	0.043	2600
2700	10×25	H6	0.017	0.051	2900	—	—	—	—	—	12.5×25	I6	0.015	0.038	3200
3300	—	—	—	—	—	12.5×20	I5	0.017	0.043	2600	12.5×30	I7	0.013	0.033	3795
											16×20	J5	0.015	0.038	3575
3900	12.5×20	I5	0.017	0.043	2600	12.5×25	I6	0.015	0.038	3200	12.5×35	I8	0.012	0.031	4120
4700	12.5×25	I6	0.015	0.038	3200	12.5×30	I7	0.013	0.033	3795	16×25	J6	0.013	0.035	3810
						16×20	J5	0.015	0.038	3575					
5600	12.5×30	I7	0.013	0.033	3795	12.5×35	I8	0.012	0.031	4120	—	—	—	—	—
6800	12.5×35	I8	0.012	0.031	4120	16×25	J6	0.013	0.035	3810	—	—	—	—	—
	16×20	J5	0.015	0.038	3575										
8200	16×25	J6	0.013	0.035	3810	—	—	—	—	—	—	—	—	—	—

Rated voltage(V) / Item / Rated capacitance (μF)	25					35					50				
	Case φDxL (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) -10℃	Rated ripple current (mArms)	Case φDxL (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) -10℃	Rated ripple current (mArms)	Case φDxL (mm)	Casing symbol	Impedance (Ω max.) 20℃	Impedance (Ω max.) -10℃	Rated ripple current (mArms)
27	—	—	—	—	—	—	—	—	—	—	5×11.5	E3	0.34	1.18	238
39	5×11.5	E3	0.22	0.80	345	5×11.5	E3	0.22	0.80	345	6.3×11.5	F3	0.14	0.50	385
47	—	—	—	—	—	5×11.5	E3	0.22	0.80	345	—	—	—	—	—
56	5×11.5	E3	0.22	0.80	345	—	—	—	—	—	6.3×11.5	F3	0.14	0.50	385
68	5×11.5	E3	0.22	0.80	345	—	—	—	—	—	—	—	—	—	—
82	5×11.5	E3	0.22	0.80	345	6.3×11.5	F3	0.094	0.35	540	—	—	—	—	—
100	6.3×11.5	F3	0.094	0.35	540	6.3×11.5	F3	0.094	0.35	540	8×12	G3	0.074	0.22	724
120	6.3×11.5	F3	0.094	0.35	540	—	—	—	—	—	8×15	G4	0.061	0.18	950
150	6.3×11.5	F3	0.094	0.35	540	—	—	—	—	—	10×12.5	H3	0.061	0.18	1250
180	—	—	—	—	—	—	—	—	—	—	8×20	G5	0.046	0.14	1190
220	—	—	—	—	—	8×12	G3	0.056	0.19	945	10×16	H4	0.042	0.12	1650
270	—	—	—	—	—	8×15	G4	0.045	0.15	1250	10×20	H5	0.030	0.090	2060
330	8×12	G3	0.056	0.19	945	10×12.5	H3	0.039	0.14	1560	10×25	H6	0.028	0.084	2420
390	8×15	G4	0.045	0.15	1250	8×20	G5	0.029	0.11	1500	—	—	—	—	—
470	10×12.5	H3	0.039	0.14	1560	10×16	H4	0.028	0.10	2000	12.5×20	I5	0.027	0.068	2300
560	8×20	G5	0.029	0.11	1500	10×20	H5	0.020	0.060	2500	12.5×25	I6	0.023	0.059	2800
680	10×16	H4	0.028	0.10	2000	10×25	H6	0.017	0.051	2900	12.5×30	I7	0.021	0.052	3500
820	10×20	H5	0.020	0.060	2500	—	—	—	—	—	12.5×35	I8	0.019	0.051	3810
											16×20	J5	0.023	0.059	3070
1000	10×25	H6	0.017	0.051	2900	12.5×20	I5	0.017	0.043	2600	16×25	J6	0.021	0.056	3270
1200	—	—	—	—	—	12.5×25	I6	0.015	0.038	3200	—	—	—	—	—
1500	12.5×20	I5	0.017	0.043	2600	12.5×30	I7	0.013	0.033	3795	—	—	—	—	—
						16×20	J5	0.015	0.038	3575					
1800	12.5×25	I6	0.015	0.038	3200	12.5×35	I8	0.012	0.031	4120	—	—	—	—	—
2200	12.5×30	I7	0.013	0.033	3795	16×25	J6	0.013	0.035	3810	—	—	—	—	—
	16×20	J5	0.015	0.038	3575										
2700	12.5×35	I8	0.012	0.031	4120	—	—	—	—	—	—	—	—	—	—
3300	16×25	J6	0.013	0.035	3810	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105℃ , 100kHz ; Impedance : 100kHz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

105°C Use, miniature, High-Reliability, Low ESR Capacitors

GREEN CAP | Low ESR | 105°C 8000hours | Anti-cleaning solvent

- Smaller and higher ripple current than RJB series.
- Guarantees 8000 hours at 105℃.
  (φ5 to 6.3 : 2000 hours ; φ8: 3000 hours; φ10: 5000 hours)

Miniaturized
Low ESR

RJD ⇦ RJB

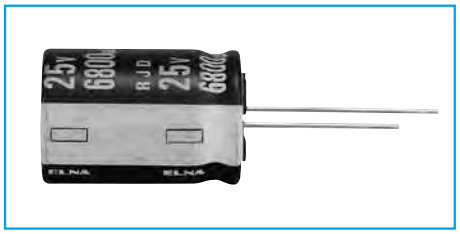

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF), V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 6.3, 10, 16, 25, 35, 50, 63, 80, 100 tanδ (max.): 0.22, 0.19, 0.16, 0.14, 0.12, 0.10, 0.10, 0.08, 0.08 0.02 is added to every 1000μF increase over 1000μF. (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 6.3, 10, 16, 25, 35, 50, 63, 80, 100 Impedance ratio (max.) Z−55℃/Z+20℃: 3, 3, 3, 3, 3, 3, 3, 3, 3 (120Hz)
Endurance (105℃) (Applied ripple current)	Test time: φ5 & 6.3 : 2000 hours; φ8 : 3000 hours; φ10 : 5000 hours; φ12.5 to φ20 : 8000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 200% or less of the initial specified value
Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

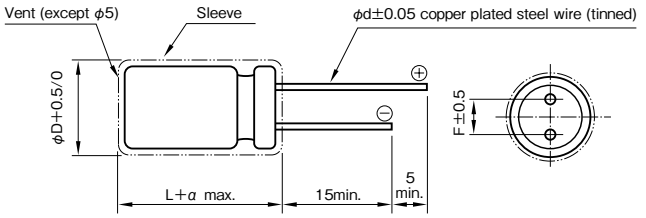

φD	5	6.3	8	10	12.5	16	18	20
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0
α	1.0	1.0	1.0	2.0	2.0	2.0	2.0	2.0

(Note) Whisker preventive structure is possible for φ8 or more.

Coefficient of Frequency for Rated Ripple Current

Rated Capacitance (μF) \ Frequency (Hz)	50・60	120	300	1k	10k・100k
56 or less	0.20	0.30	0.50	0.80	1
68 to 330	0.55	0.65	0.75	0.85	1
390 to 1000	0.70	0.75	0.80	0.90	1
1200 to 18000	0.80	0.85	0.90	0.95	1

Part numbering system (example : 6.3V10000μF)

RJD	—	6	V	103	M	J7	# —	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping(Forming) symbol

If it is whisker preventive structure, should change "#" into "G".

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage(V) / Item / Rated capacitance (μF)	6.3					10					16				
	Case φD × L (mm)	Casing symbol	ESR (Ω max.) 20℃	ESR (Ω max.) -10℃	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.) 20℃	ESR (Ω max.) -10℃	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.) 20℃	ESR (Ω max.) -10℃	Rated ripple current (mArms)
22	—	—	—	—	—	—	—	—	—	—	5 × 11.5	E3	0.50	1.0	182
33	—	—	—	—	—	—	—	—	—	—	5 × 11.5	E3	0.50	1.0	182
47	—	—	—	—	—	—	—	—	—	—	5 × 11.5	E3	0.50	1.0	182
82	—	—	—	—	—	—	—	—	—	—	5 × 11.5	E3	0.50	1.0	182
100	—	—	—	—	—	5 × 11.5	E3	0.50	1.0	182	6.3 × 11.5	F3	0.25	0.50	295
150	5 × 11.5	E3	0.50	1.0	182	—	—	—	—	—	6.3 × 11.5	F3	0.25	0.50	295
180	—	—	—	—	—	6.3 × 11.5	F3	0.25	0.50	295	8 × 12	G3	0.117	0.234	567
220	—	—	—	—	—	6.3 × 11.5	F3	0.25	0.50	295	8 × 12	G3	0.117	0.234	567
330	6.3 × 11.5	F3	0.25	0.50	295	8 × 12	G3	0.117	0.234	567	8 × 12	G3	0.117	0.234	567
390	—	—	—	—	—	—	—	—	—	—	8 × 12	G3	0.117	0.234	567
470	8 × 12	G3	0.117	0.234	567	8 × 12	G3	0.117	0.234	567	8 × 15	G4	0.085	0.170	733
											10 × 12.5	H3	0.090	0.180	764
560	8 × 12	G3	0.117	0.234	567	8 × 12	G3	0.117	0.234	567	8 × 20	G5	0.065	0.130	996
680	8 × 12	G3	0.117	0.234	567	—	—	—	—	—	8 × 15	G4	0.085	0.170	733
											10 × 12.5	H3	0.090	0.180	764
820	—	—	—	—	—	8 × 15	G4	0.085	0.170	733	8 × 20	G5	0.065	0.130	996
						10 × 12.5	H3	0.090	0.180	764	10 × 16	H4	0.068	0.136	1060
1000	8 × 15	G4	0.085	0.170	733	8 × 20	G5	0.065	0.130	996	10 × 16	H4	0.068	0.136	1060
						10 × 12.5	H3	0.090	0.180	764					
	10 × 12.5	H3	0.090	0.180	764	10 × 16	H4	0.068	0.136	1060	10 × 20	H5	0.052	0.104	1230
1200	10 × 12.5	H3	0.090	0.180	764	8 × 20	G5	0.065	0.130	996	10 × 20	H5	0.052	0.104	1230
	10 × 16	H4	0.068	0.136	1060	10 × 16	H4	0.068	0.136	1060	10 × 25	H6	0.045	0.090	1450
1500	8 × 20	G5	0.065	0.130	996	10 × 20	H5	0.052	0.104	1230	10 × 25	H6	0.045	0.090	1450
	10 × 16	H4	0.068	0.136	1060	12.5 × 15	I4	0.062	0.124	1210	10 × 30	H7	0.035	0.070	1830
1800	12.5 × 15	I4	0.062	0.124	1210	10 × 20	H5	0.052	0.104	1230	—	—	—	—	—
						10 × 25	H6	0.045	0.090	1450					
2200	10 × 20	H5	0.052	0.104	1230	10 × 25	H6	0.045	0.090	1450	10 × 30	H7	0.035	0.070	1830
											12.5 × 20	I5	0.038	0.076	1700
	10 × 25	H6	0.045	0.090	1450	12.5 × 20	I5	0.038	0.076	1700	16 × 16	J4	0.043	0.086	1700
2700	10 × 25	H6	0.045	0.090	1450	10 × 30	H7	0.035	0.070	1830	12.5 × 25	I6	0.030	0.060	1950
						12.5 × 20	I5	0.038	0.076	1700	18 × 16	K4	0.038	0.076	2010
3300	10 × 30	H7	0.035	0.070	1830	12.5 × 25	I6	0.030	0.060	1950	12.5 × 30	I7	0.025	0.050	2330
	12.5 × 20	I5	0.038	0.076	1700						16 × 20	J5	0.029	0.058	2230
3900	12.5 × 25	I6	0.030	0.060	1950	12.5 × 25	I6	0.030	0.060	1950	12.5 × 35	I8	0.022	0.044	2620
						18 × 16	K4	0.038	0.076	2010	16 × 20	J5	0.029	0.058	2230
4700	12.5 × 25	I6	0.030	0.060	1950	12.5 × 30	I7	0.025	0.050	2330	12.5 × 40	I9	0.017	0.034	3160
											16 × 25	J6	0.022	0.044	2650
	18 × 16	K4	0.038	0.076	2010	16 × 20	J5	0.029	0.058	2230	18 × 20	K5	0.028	0.056	2500
5600	12.5 × 30	I7	0.025	0.050	2330	12.5 × 35	I8	0.022	0.044	2620	16 × 25	J6	0.022	0.044	2650
	16 × 20	J5	0.029	0.058	2230						16 × 31.5	J7	0.018	0.036	3210
6800	12.5 × 35	I8	0.022	0.044	2620	12.5 × 40	I9	0.017	0.034	3160	18 × 25	K6	0.020	0.040	3000
						16 × 25	J6	0.022	0.044	2650					
8200	12.5 × 40	I9	0.017	0.034	3160	16 × 31.5	J7	0.018	0.036	3210	18 × 35.5	K8	0.015	0.030	3960
	16 × 25	J6	0.022	0.044	2650										
	18 × 20	K5	0.028	0.056	2500	18 × 25	K6	0.020	0.040	3000					
10000	16 × 31.5	J7	0.018	0.036	3210	16 × 40	J9	0.015	0.030	3880	18 × 40	K9	0.014	0.028	4300
	18 × 25	K6	0.020	0.040	3000	18 × 35.5	K8	0.015	0.030	3960					
12000	18 × 25	K6	0.020	0.040	3000	—	—	—	—	—	—	—	—	—	—
15000	18 × 35.5	K8	0.015	0.030	3960	18 × 40	K9	0.014	0.028	4300	—	—	—	—	—
18000	18 × 40	K9	0.014	0.028	4300	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105℃ , 100kHz ; ESR : 100kHz

ALUMINUM

MINIATURE ALUMINUM

105℃

Standard Ratings

Rated voltage(V) / Item / Rated capacitance (μF)	25					35					50				
	Case φD × L (mm)	Casing symbol	ESR (Ω max.) 20℃	ESR (Ω max.) -10℃	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.) 20℃	ESR (Ω max.) -10℃	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.) 20℃	ESR (Ω max.) -10℃	Rated ripple current (mArms)
10	5 × 11.5	E3	0.50	1.0	182	5 × 11.5	E3	0.50	1.0	182	5 × 11.5	E3	0.90	1.8	173
22	5 × 11.5	E3	0.50	1.0	182	5 × 11.5	E3	0.50	1.0	182	5 × 11.5	E3	0.90	1.8	173
27	5 × 11.5	E3	0.50	1.0	182	5 × 11.5	E3	0.50	1.0	182	5 × 11.5	E3	0.90	1.8	173
33	5 × 11.5	E3	0.50	1.0	182	5 × 11.5	E3	0.50	1.0	182	6.3 × 11.5	F3	0.40	0.80	285
47	5 × 11.5	E3	0.50	1.0	182	6.3 × 11.5	F3	0.25	0.50	295	6.3 × 11.5	F3	0.40	0.80	285
56	5 × 11.5	E3	0.50	1.0	182	6.3 × 11.5	F3	0.25	0.50	295	6.3 × 11.5	F3	0.40	0.80	285
82	6.3 × 11.5	F3	0.25	0.50	295	6.3 × 11.5	F3	0.25	0.50	295	8 × 12	G3	0.19	0.38	508
100	6.3 × 11.5	F3	0.25	0.50	295	8 × 12	G3	0.117	0.234	567	8 × 15	G4	0.155	0.31	636
150	8 × 12	G3	0.117	0.234	567	8 × 12	G3	0.117	0.234	567	10 × 12.5	H3	0.17	0.34	628
180	—	—	—	—	—	8 × 12	G3	0.117	0.234	567	10 × 12.5	H3	0.17	0.34	628
220	8 × 12	G3	0.117	0.234	567	8 × 15	G4	0.085	0.170	733	10 × 16	H4	0.119	0.238	850
270	8 × 12	G3	0.117	0.234	567	8 × 15	G4	0.085	0.170	733	10 × 20	H5	0.081	0.162	1120
						10 × 12.5	H3	0.090	0.180	764					
330	8 × 12	G3	0.117	0.234	567	8 × 20	G5	0.065	0.130	996	10 × 20	H5	0.081	0.162	1120
	10 × 12.5	H3	0.090	0.180	764	10 × 16	H4	0.068	0.136	1060	12.5 × 15	I4	0.09	0.18	1170
390	8 × 15	G4	0.085	0.170	733	8 × 20	G5	0.065	0.130	996	—	—	—	—	—
						10 × 16	H4	0.068	0.136	1060					
470	8 × 15	G4	0.085	0.170	733	10 × 20	H5	0.052	0.104	1230	12.5 × 20	I5	0.057	0.114	1540
	10 × 12.5	H3	0.090	0.180	764										
560	8 × 20	G5	0.065	0.130	996	10 × 20	H5	0.052	0.104	1230	12.5 × 25	I6	0.042	0.084	1910
	10 × 16	H4	0.068	0.136	1060	12.5 × 15	I4	0.062	0.124	1210					
680	10 × 16	H4	0.068	0.136	1060	10 × 25	H6	0.045	0.090	1450	18 × 20	K5	0.034	0.068	2420
820	10 × 20	H5	0.052	0.104	1230	12.5 × 20	I5	0.038	0.076	1700	12.5 × 30	I7	0.038	0.076	2290
	12.5 × 15	I4	0.062	0.124	1210						18 × 20	K5	0.034	0.068	2420
1000	10 × 25	H6	0.045	0.090	1450	10 × 30	H7	0.035	0.070	1830	16 × 25	J6	0.031	0.062	2450
	12.5 × 20	I5	0.038	0.076	1700	12.5 × 20	I5	0.038	0.076	1700	18 × 20	K5	0.034	0.068	2420
1200	12.5 × 20	I5	0.038	0.076	1700	12.5 × 25	I6	0.030	0.060	1950	18 × 25	K6	0.029	0.058	2750
						18 × 16	K4	0.038	0.076	2010					
1500	10 × 30	H7	0.035	0.070	1830	12.5 × 30	I7	0.025	0.050	2330	16 × 31.5	J7	0.027	0.054	3100
	16 × 16	J4	0.043	0.086	1700	16 × 20	J5	0.029	0.058	2230	18 × 25	K6	0.029	0.058	2750
1800	12.5 × 25	I6	0.030	0.060	1950	12.5 × 35	I8	0.022	0.044	2620	16 × 35.5	J8	0.023	0.046	3530
	18 × 16	K4	0.038	0.076	2010	16 × 20	J5	0.029	0.058	2230	18 × 31.5	K7	0.025	0.050	3200
2200	12.5 × 30	I7	0.025	0.050	2330	12.5 × 40	I9	0.017	0.034	3160	16 × 40	J9	0.020	0.040	3830
						16 × 25	J6	0.022	0.044	2650					
	16 × 20	J5	0.029	0.058	2230	18 × 20	K5	0.028	0.056	2500	18 × 35.5	K8	0.022	0.044	3670
2700	12.5 × 35	I8	0.022	0.044	2620	16 × 31.5	J7	0.018	0.036	3210	18 × 40	K9	0.018	0.036	4160
	18 × 25	K6	0.020	0.040	3000	18 × 25	K6	0.020	0.040	3000					
3300	12.5 × 40	I9	0.017	0.034	3160	18 × 25	K6	0.020	0.040	3000	—	—	—	—	—
	16 × 25	J6	0.022	0.044	2650										
	18 × 20	K5	0.028	0.056	2500	18 × 31.5	K7	0.016	0.032	3660					
3900	—	—	—	—	—	18 × 35.5	K8	0.015	0.030	3960	—	—	—	—	—
						18 × 40	K9	0.014	0.028	4300					
						20 × 25	L6	0.019	0.038	3920					
4700	18 × 25	K6	0.020	0.040	3000	18 × 35.5	K8	0.015	0.030	3960	—	—	—	—	—
						18 × 40	K9	0.014	0.028	4300					
						20 × 30	L7	0.018	0.036	4270					
5600	18 × 35.5	K8	0.015	0.030	3960	18 × 40	K9	0.014	0.028	4300	—	—	—	—	—
	20 × 25	L6	0.019	0.038	3920	20 × 35.5	L8	0.014	0.028	5250					
6800	18 × 35.5	K8	0.015	0.030	3960	18 × 40	K9	0.014	0.028	4300	—	—	—	—	—
	20 × 30	L7	0.018	0.036	4270	20 × 40	L9	0.013	0.026	5680					
8200	20 × 35.5	L8	0.014	0.028	5250	18 × 40	K9	0.014	0.028	4300	—	—	—	—	—
						20 × 40	L9	0.013	0.026	5680					
10000	18 × 40	K9	0.014	0.028	4300	—	—	—	—	—	—	—	—	—	—
	20 × 40	L9	0.013	0.026	5680										

Rated voltage(V) / Item / Rated capacitance (μF)	63					80					100				
	Case φD × L (mm)	Casing symbol	ESR (Ω max.) 20℃	ESR (Ω max.) -10℃	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.) 20℃	ESR (Ω max.) -10℃	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.) 20℃	ESR (Ω max.) -10℃	Rated ripple current (mArms)
10	5 × 11.5	E3	1.1	2.2	162	5 × 11.5	E3	1.90	3.8	123	6.3 × 11.5	F3	1.1	2.2	186
22	6.3 × 11.5	F3	0.54	1.1	265	8 × 12	G3	0.53	1.1	315	8 × 12	G3	0.53	1.1	315
27	6.3 × 11.5	F3	0.54	1.1	265	—	—	—	—	—	—	—	—	—	—
33	6.3 × 11.5	F3	0.54	1.1	265	8 × 12	G3	0.53	1.1	315	8 × 15	G4	0.35	0.70	423
47	8 × 12	G3	0.32	0.64	406	8 × 15	G4	0.35	0.70	423	10 × 12.5	H3	0.47	0.94	392
56	8 × 12	G3	0.32	0.64	406	10 × 12.5	H3	0.47	0.94	392	10 × 16	H4	0.32	0.64	520
82	8 × 20	G5	0.17	0.34	682	10 × 16	H4	0.32	0.64	520	10 × 20	H5	0.25	0.50	640
100	10 × 16	H4	0.17	0.34	710	10 × 20	H5	0.25	0.50	640	10 × 25	H6	0.155	0.31	636
150	10 × 20	H5	0.12	0.24	920	12.5 × 20	I5	0.13	0.26	1010	12.5 × 25	I6	0.11	0.22	1200
180	10 × 25	H6	0.10	0.20	1110	—	—	—	—	—	—	—	—	—	—
220	12.5 × 20	I5	0.075	0.15	1340	12.5 × 25	I6	0.11	0.22	1200	12.5 × 30	I7	0.090	0.18	1450
330	12.5 × 25	I6	0.065	0.13	1730	12.5 × 30	I7	0.090	0.18	1440	16 × 25	J6	0.079	0.16	1650
470	12.5 × 30	I7	0.055	0.11	2110	16 × 31.5	J7	0.059	0.118	2100	16 × 35.5	J8	0.052	0.104	2340
	16 × 25	J6	0.052	0.104	2180	18 × 25	K6	0.064	0.128	1980	18 × 31.5	K7	0.054	0.108	2350
560	16 × 25	J6	0.052	0.104	2180	16 × 31.5	J7	0.059	0.118	2100	16 × 40	J9	0.045	0.090	2650
	18 × 20	K5	0.058	0.116	2290	18 × 25	K6	0.064	0.128	1980	18 × 35.5	K8	0.044	0.088	2730
680	16 × 31.5	J7	0.042	0.084	2710	16 × 35.5	J8	0.052	0.104	2340	16 × 40	J9	0.045	0.090	2650
	18 × 25	K6	0.050	0.10	2610	18 × 31.5	K7	0.054	0.108	2350	18 × 35.5	K8	0.044	0.088	2730
820	16 × 31.5	J7	0.042	0.084	2710	16 × 40	J9	0.045	0.090	2650	18 × 40	K9	0.039	0.078	3050
	18 × 25	K6	0.050	0.10	2610	18 × 35.5	K8	0.044	0.088	2730					
1000	16 × 35.5	J8	0.036	0.072	2820	18 × 40	K9	0.039	0.078	3050	—	—	—	—	—
	18 × 31.5	K7	0.042	0.084	3080										
1500	18 × 35.5	K8	0.035	0.070	3530	—	—	—	—	—	—	—	—	—	—
1800	18 × 40	K9	0.032	0.064	3880	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105℃ , 100kHz ; ESR : 100kHz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

For SRS AirBag

GREEN CAP | 105℃ 5000hours | Anti-cleaning solvent | For AirBag

- For SRS AirBag application
- High capacitance, low impedance, and good low temperature behavior
- Guarantees 5000 hours at 105℃.

For SAS AirBag

RJE ⇦ RJD

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	0 to +30 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 25 / 35; tanδ (max.): 0.20 / 0.16. 0.02 is added to every 1000μF increase over 1000μF (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 25 / 35; Impedance ratio (max.) Z−55℃/Z+20℃: 3 / 3 (120Hz)
Endurance (105℃)	Test time: 5000 hours; Leakage current: The initial specified value or less; Percentage of capacitance change: Within ±30% of initial value; Tangent of loss angle: 300% or less of the initial specified value
Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

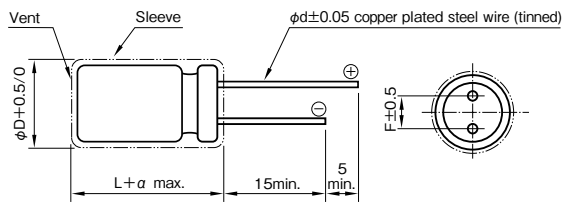

φD	12.5	16	18
F	5.0	7.5	7.5
φd	0.6	0.8	0.8
α	2.0	2.0	2.0

(Note) Whisker preventive structure is possible.

Coefficient of Frequency for Rated Ripple Current

Rated capacitance (μF) \ Frequency (Hz)	50・60	120	1k	10k・100k
830 to 1100	0.70	0.75	0.90	1
1200 to 11000	0.80	0.85	0.95	1

Part numbering system (example : 25V4200μF)

RJE	—	25	V	422	A	I9	(#)Q	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol	Optional symbol		Taping(Forming) symbol

If it is whisker preventive structure, should change "#" into "G".

Standard Ratings

Case size φD×L (mm)	Casing symbol	25 Rated capacitance (μF)	25 ESR Ω (max.) / 100kHz 20℃	25 ESR Ω (max.) / 100kHz −40℃	25 Rated ripple current (mArms)	35 Rated capacitance (μF)	35 ESR Ω (max.) / 100kHz 20℃	35 ESR Ω (max.) / 100kHz −40℃	35 Rated ripple current (mArms)
12.5×15	I4	1100	0.174	0.52	1210	830	0.174	0.52	1210
12.5×20	I5	1800	0.107	0.27	1670	1300	0.107	0.27	1670
12.5×25	I6	2400	0.084	0.21	1950	1600	0.084	0.21	1950
12.5×30	I7	3200	0.070	0.18	2330	2200	0.070	0.18	2330
12.5×35	I8	3700	0.062	0.16	2620	2500	0.062	0.16	2620
12.5×40	I9	4200	0.048	0.12	3160	2900	0.048	0.12	3160
16×16	J4	2100	0.121	0.36	1700	1500	0.121	0.36	1700
16×20	J5	3100	0.082	0.21	2230	2100	0.082	0.21	2230
16×25	J6	4300	0.062	0.16	2650	3000	0.062	0.16	2650
16×31.5	J7	5800	0.051	0.13	3210	4000	0.051	0.13	3210
16×35.5	J8	6800	0.045	0.11	3570	4600	0.045	0.11	3570
16×40	J9	7800	0.042	0.11	3880	5300	0.042	0.11	3880
18×16	K4	3000	0.107	0.32	2010	2100	0.107	0.32	2010
18×20	K5	4300	0.079	0.20	2500	3000	0.079	0.20	2500
18×25	K6	6000	0.056	0.14	3000	4200	0.056	0.14	3000
18×31.5	K7	8000	0.045	0.11	3660	5600	0.045	0.11	3660
18×35.5	K8	9300	0.042	0.11	3960	6500	0.042	0.11	3960
18×40	K9	11000	0.040	0.10	4300	7400	0.040	0.10	4300

(Note) Rated ripple current : 105℃, 100kHz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

RJK MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

For SRS AirBag

GREEN CAP | 105℃ 5000hours | Anti-cleaning solvent | For AirBag

- For SRS AirBag application
- High capacitance, low impedance, and good low temperature behavior.
- Guarantees 5000 hours at 105℃.

Miniaturized
Low ESR

RJK ⇦ RJE

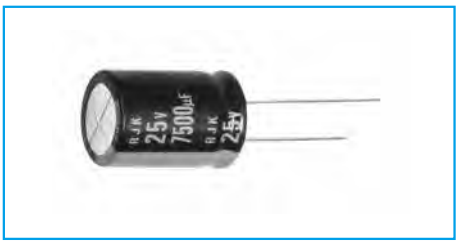

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	0 to +30 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 25 / 35; tanδ (max.): 0.20 / 0.16. 0.02 is added to every 1000μF increase over 1000μF (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 25 / 35; Impedance ratio (max.) Z−55℃/Z+20℃: 3 / 3 (120Hz)
Endurance (105℃)	Test time: 5000 hours; Leakage current: The initial specified value or less; Percentage of capacitance change: Within ±30% of initial value; Tangent of loss angle: 300% or less of the initial specified value
Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

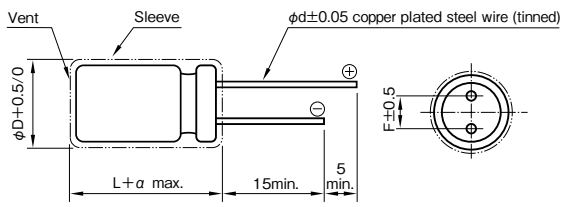

ϕD	16	18	20
F	7.5	7.5	10.0
ϕd	0.8	0.8	1.0
α	1.5	1.5	1.5

(Note) Whisker preventive structure is possible.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	120	1k	10k	100k
25, 35	0.80	0.85	0.95	1

Part numbering system (example : 25V4200μF)

RJK	—	25	V	422	A	J5	#Q	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol	Optional symbol		Taping(Forming) symbol

If it is whisker preventive structure, should change “#” into “G”.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Case φD × L (mm) / Casing symbol		25				35			
		Rated capacitance (μF)	ESR (Ω max. / 100kHz) 20℃	ESR (Ω max. / 100kHz) − 40℃	Rated ripple current (mArms)	Rated capacitance (μF)	ESR (Ω max. / 100kHz) 20℃	ESR (Ω max. / 100kHz) − 40℃	Rated ripple current (mArms)
16 × 20	J5	4200	0.033	0.095	2250	2500	0.033	0.095	2250
18 × 20	K5	5300	0.029	0.082	2500	3100	0.029	0.082	2500
16 × 25	J6	5900	0.024	0.073	2600	3500	0.024	0.073	2600
18 × 25	K6	7500	0.022	0.063	2800	4500	0.022	0.063	2800
16 × 31.5	J7	8000	0.021	0.052	3200	4700	0.021	0.052	3200
18 × 31.5	K7	9500	0.019	0.046	3500	5600	0.019	0.046	3500
16 × 35.5	J8	10000	0.019	0.045	3500	6000	0.019	0.045	3500
18 × 35.5	K8	11000	0.017	0.040	3700	7100	0.017	0.040	3700
16 × 40	J9	11000	0.017	0.040	3800	6600	0.017	0.040	3800
18 × 40	K9	14000	0.015	0.035	4000	8400	0.015	0.035	4000
20 × 40	L9	17000	0.015	0.035	4000	10000	0.015	0.035	4000

(Note) Rated ripple current : 105℃, 100kHz

RHS MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

105°C Use, Miniature, High-Ripple, Long Life Capacitors

GREEN CAP | 105°C 5000hours

- Higher ripple current.
- Guarantees 4000 to 5000 hours at 105℃.
- Best-suited to On-Board-Charger for EV, PHEV.

High ripple, Long life

RHS ⇦ RJ4

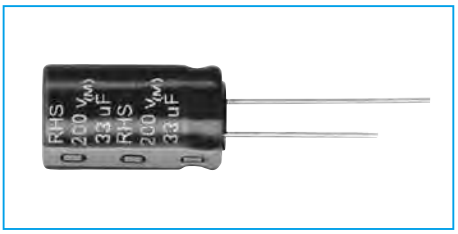

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +105
Rated Voltage (V)	160 to 450
Tolerence at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	CV≦1000 : 0.06CV+40 (after 1 minutes) CV>1000 : 0.03CV+70 (after 1 minutes) C : Rated capacitance (μF), V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	(20℃,120Hz)

Rated voltage (V)	160 to 250	350 to 400	450
Tangent of loss angle	0.12	0.15	0.20

Characteristics at high and low temperature	Rated voltage (V)	160 to 250	350 to 450
	Impedance ratio Z−25℃/Z+20℃	3	5
	Impedance ratio Z−40℃/Z+20℃	4	6

(120Hz)

Endurance (105℃) (Applied ripple current)	
Test time	φ10 : 4000 hours φ12.5 to φ22 : 5000 hours
Leakage current	The initial specified value or less
Capacitance change	Within ±20% of initial value
Tangent of loss angle	300% or less of the initial specified value

Shelf life (105℃)	
Test time	1000 hours
Leakage current	The initial specified value or less
Capacitance change	Within ±20% of initial value
Tangent of loss angle	200% or less of the initial specified value

Voltage application treatment : According to JIS C5101-4 4.1

Applicable Standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

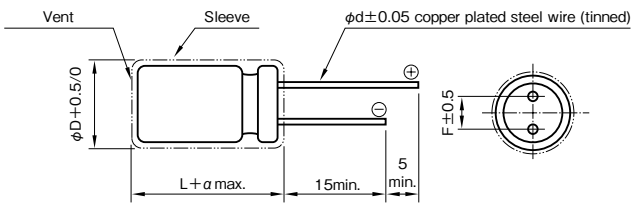

φD	10	12.5	16	18	20	22
F	5.0	5.0	7.5	7.5	10	10
φd	0.6	0.6	0.8	0.8	0.8	1.0
α	2	2.5	2.5	20L : 3.0 25 to 50L : 2.5	2.5	2.5

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Rated capacitance (μF) \ Frequency (Hz)	50・60	120	1k	10k	100k
160 to 250	4.7 to 10	0.80	1	1.75	2.00	2.50
	12 to 47	0.80	1	1.60	1.80	2.00
	56 to 560	0.80	1	1.30	1.40	1.40
350 to 450	1 to 10	0.80	1	1.75	2.00	2.50
	12 to 18	0.80	1	1.60	1.80	2.00
	22 or more	0.80	1	1.40	1.50	1.50

Part numbering system (example : 400V10μF)

RHS	—	400	V	100	M	I5	#	B	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol		Taping(Forming) symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)			160		200		250		350		400		450	
case (mm)			Rated capacitance (μF)	Rated ripple current (mArms)	Rated capacitance (μF)	Rated ripple current (mArms)	Rated capacitance (μF)	Rated ripple current (mArms)	Rated capacitance (μF)	Rated ripple current (mArms)	Rated capacitance (μF)	Rated ripple current (mArms)	Rated capacitance (μF)	Rated ripple current (mArms)
φD	L	Symbol												
10	12.5	H3	22	145	4.7	65	4.7	65	3.3	55	2.2	40	1	30
									4.7	65	3.3	43	2.2	45
			27	160			10	95	8.2	85	4.7	65	4.7	50
									10	95	6.8	80	6.8	80
10	16	H4	33	170	10	96	–	–	12	120	10	90	8.2	100
					22	140								
			39	185	33	170							10	110
10	20	H5	47	245	–	–	22	170	15	135	15	135	12	120
			56	270					22	160				
10	25	H6	68	315	47	260	33	220	–	–	18	165	15	150
							39	240			22	180	22	180
10	30	H7	100	425	68	350	47	290	27	220	–	–	–	–
									33	250				
12.5	20	I5	68	335	47	280	33	235	27	220	22	200	18	180
					56	305								
			82	370	68	335	47	280	33	245			22	200
12.5	25	I6	100	440	82	400	68	365	39	280	27	240	27	240
					100	440			47	320	33	265	33	265
12.5	30	I7	150	580	120	520	82	430	56	370	39	310	47	340
					150	580					47	340		
12.5	35	I8	220	750	–	–	100	505	68	450	–	–	–	–
12.5	40	I9	–	–	180	715	120	585	–	–	56	420	–	–
											68	475		
16	20	J5	100	470	47	305	33	250	33	250	22	205	22	205
			120	490	68	393	47	320			33	250	27	225
			150	580	100	450	68	370	47	300	47	300	33	250
16	25	J6	180	660	120	574	100	520	68	420	68	440	47	380
			220	770	150	605	120	540						
16	31.5	J7	270	940	180	765	150	700	82	510	–	–	56	445
					220	845			100	590			68	490
16	35.5	J8	330	965	270	875	180	710	120	680	82	580	–	–
											100	620		
16	40	J9	390	1070	–	–	220	800	150	920	120	720	82	600
													100	660
18	20	K5	180	640	120	530	100	480	56	370	–	–	39	310
					150	620			68	435			47	360
18	25	K6	270	860	180	710	150	645	82	490	–	–	68	470
					220	830			100	570				
18	31.5	K7	330	1060	270	950	180	780	120	690	82	610	82	570
											100	640		
			390	1200			220	910			120	670	100	630
18	35.5	K8	470	1400	330	1180	270	1070	150	820	150	800	120	730
18	40	K9	–	–	390	1350	–	–	180	940	–	–	–	–
18	45	KA	560	1600	470	1270	330	1240	220	1100	180	980	150	880
18	50	KB	680	1900	560	1800	390	1500	–	–	–	–	180	1000
20	40	L9	–	–	–	–	–	–	220	1110	–	–	150	935
20	45	LA	–	–	–	–	–	–	270	1200	–	–	180	1050
20	50	LB	820	2300	–	–	470	1700	–	–	–	–	220	1230
22	40	N9	680	1945	560	1765	390	1475	270	1297	220	1170	180	1065
22	45	NA	820	2235	–	–	470	1695	330	1511	–	–	220	1235
22	50	NB	1000	2575	–	–	560	1930	–	–	–	–	270	1430

(Note) Rated ripple current : 105℃ , 120Hz

RHC MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

105˚C Use, Miniature, High-Ripple, Long Life Capacitors

GREEN CAP | 105˚C 10000hours

- Higher ripple current.
- Guarantees 5000 to 10000 hours at 105℃.
- Best-suited On-Board-Charger for EV, PHEV.

High ripple, Long life

RHC ⇦ RHS

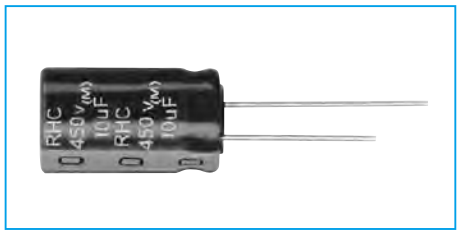

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +105
Rated Voltage (V)	160 to 450
Tolerence at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.04CV + 100 (after 1 minutes) C : Rated capacitance (μF), V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 160 to 250 — Tangent of loss angle: 0.15; Rated voltage (V): 350 to 450 — Tangent of loss angle: 0.20 ＊The black circles in the capacitance column correspond. (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 160 to 250 / 350 to 450 Impedance ratio (max.) Z−25℃/Z+20℃: 3 / 5 Impedance ratio (max.) Z−40℃/Z+20℃: 6 / 6 (120Hz)
Endurance (105℃) (Applied ripple current)	Test time: φ10×12.5L : 5000 hours; φ10×16L to 25L : 8000 hours; φ10×30L, φ12.5 to φ22 : 10000 hours Leakage current: The initial specifide value or less Capacitance change: Within ±30% of initial value Tangent of loss angle: 300% or less of the initial specified value
Shelf life (105℃)	Test time: 1000 hours Leakage current: The initial specifide value or less Capacitance change: Within ±20% of initial value Tangent of loss angle: 200% or less of the initial specified value Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

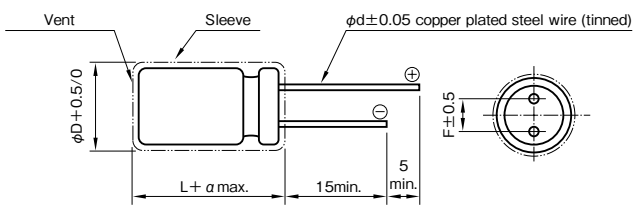

φD	10	12.5	16	18	20	22
F	5.0	5.0	7.5	7.5	10	10
φd	0.6	0.6	0.8	0.8	0.8	1.0
α	2	2.5	2.5	20L : 3.0 25 to 50L : 2.5	2.5	2.5

Coefficient of Frequency for Rated Ripple Current

Rated capacitance (μF) \ Frequency (Hz)	120	1k	10k	100k
1 to 5.6	0.20	0.40	0.80	1
6.8 to 18	0.30	0.60	0.90	1
22 to 82	0.40	0.70	0.90	1
100 or more	0.45	0.75	0.90	1

Part numbering system (example : 400V10μF)

RHC	—	400	V	100	M	H5	#	B	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol		Taping(Forming) symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)			160		200		250		350		400		450	
case (mm)			Rated capacitance (μF)	Rated ripple current (mArms)	Rated capacitance (μF)	Rated ripple current (mArms)	Rated capacitance (μF)	Rated ripple current (mArms)	Rated capacitance (μF)	Rated ripple current (mArms)	Rated capacitance (μF)	Rated ripple current (mArms)	Rated capacitance (μF)	Rated ripple current (mArms)
φD	L	Symbol												
10	12.5	H3	–	–	4.7	225	4.7	225	4.7	270	3.3	245	2.2	210
							6.8	250					3.3	245
					10	300	8.2	270	5.6	285			3.9	255
10	16	H4	39	665	6.8	470	10	525	18	675	4.7	450	4.7	400
					22	570	22	570			6.8	475	6.8	445
			47	730	27	580	27	710			10	500	10	500
					33	640					12	595		
10	20	H5	56	830	47	780	33	700	22	690	15	620	15	620
			68	895							18	650		
10	25	H6	82	1090	56	945	39	825	–	–	22	765	18	725
					68	1015	47	885			27	815		
10	30	H7	100	1345	82	1250	56	1080	–	–	33	935	22	835
12.5	20	I5	100	1495	68	1295	47	1125	33	1040	22	925	18	870
							56	1200			27	985	22	925
12.5	25	I6	120	1645	100	1540	68	1330	47	1245	33	1075	27	1055
			150	1790			82	1430			39	1160		
12.5	30	I7	180	1970	120	1695	100	1590	56	1300	47	1220	33	1095
													47	1220
12.5	35	I8	220	2140	150	1865	120	1700	68	1420	56	1320	39	1155
					180	1985								
12.5	40	I9	270	2580	–	–	150	2090	82	1690	68	1575	56	1465
16	20	J5	150	1995	68	1485	68	1485	47	1320	22	1055	22	1055
											33	1185	27	1120
			180	2125	100	1710	82	1590	56	1405	47	1320	33	1185
					120	1830	100	1710			56	1350	39	1195
16	25	J6	220	2320	150	2020	120	1855	82	1640	68	1525	47	1330
					180	2155								
16	31.5	J7	330	3000	220	2450	150	2135	100	1865	82	1730	56	1500
					270	2640	180	2280					68	1615
16	35.5	J8	390	3330	–	–	220	2530	120	2000	100	1875	82	1740
16	40	J9	470	3775	330	3120	270	2805	150	2300	120	2110	100	1975
18	20	K5	220	2235	150	1950	120	1790	82	1590	56	1380	47	1295
					180	2080					68	1485	56	1380
18	25	K6	330	2725	220	2380	150	2055	100	1840	82	1710	68	1595
					270	2540	180	2190						
18	31.5	K7	390	2985	330	2865	220	2445	150	2215	100	1905	82	1765
			470	3185							120	2035	100	1905
18	35.5	K8	–	–	390	3095	270	2730	180	2450	150	2300	120	2110
18	40	K9	560	4070	470	3465	330	3085	220	2720	–	–	150	2420
18	45	KA	680	4140	560	3755	–	–	–	–	180	2655	–	–
18	50	KB	820	4595	–	–	390	3605	270	3305	220	3065	180	2850
							470	3840						
20	40	L9	680	3850	560	3735	390	3220	–	–	–	–	–	–
20	45	LA	820	4435	680	4320	470	3705	270	3190	–	–	180	2750
20	50	LB	1000	5115	–	–	560	4225	330	3685	270	3425	220	3175
22	40	N9	820	4270	680	4160	470	3570	270	3070	220	2850	180	2650
22	45	NA	1000	4945	–	–	560	4085	330	3560	270	3310	220	3070
22	50	NB	–	–	820	4995	680	4695	–	–	330	3815	270	3550

(Note) Rated ripple current : 105℃ , 120Hz

RHD MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

105°C Use, Miniature, High-Ripple, Long Life Capacitors

GREEN CAP | 105°C 12000hours

- Higher ripple current.
- Guarantees 8000 to 12000 hours at 105℃.
- Best-suited to On-Board-Charger for EV, PHEV.

Long life

RHD ⇦ RHC

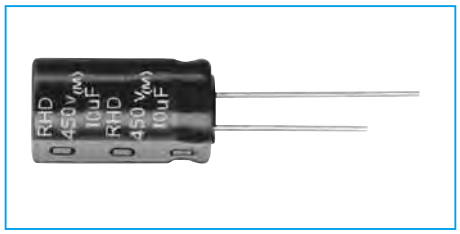

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +105
Rated Voltage (V)	160 to 450
Tolerence at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current(μA) (max.)	0.04CV + 100 (after 1 minutes) C:Rated capacitance (μF),V:Rated Voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 160 to 250 — Tangent of loss angle: 0.15; Rated voltage (V): 350 to 450 — Tangent of loss angle: 0.20 (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 160 to 250 / 350 to 450; Impedance ratio (max.) Z−25℃/Z+20℃: 3 / 5; Impedance ratio (max.) Z−40℃/Z+20℃: 6 / 6 (120Hz)
Endurance (105℃) (Applied ripple current)	Test time: φ10×12.5L : 8000hours; φ10×16L to 25L : 10000hours; φ10×30L, φ12.5 to φ22 : 12000hours; Leakage current: The initial specified value or less; Capacitance change: Within ±30% of initial value; Tangent of loss angle: 300% or less of the initial specified value
Shelf life (105℃)	Test time: 1000hours; Leakage current: The initial specified value or less; Capacitance change: Within ±20% of initial value; Tangent of loss angle: 200% or less of the initial specified value; Voltage application treatment : According to JIS C5101-4 4.1
Applicable Standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

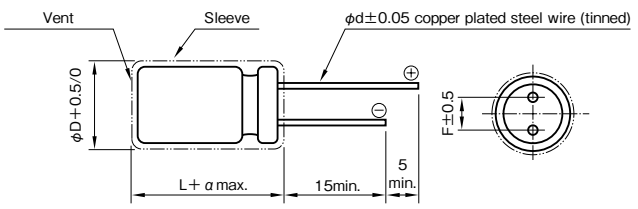

φD	10	12.5	16	18	20	22
F	5.0	5.0	7.5	7.5	10	10
φd	0.6	0.6	0.8	0.8	0.8	1.0
α	2	2.5	2.5	20L : 3.0 25 to 50L : 2.5	2.5	2.5

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	120	1k	10k	100k
1 to 5.6	0.20	0.40	0.80	1
6.8 to 18	0.30	0.60	0.90	1
22 to 82	0.40	0.70	0.90	1
100 or more	0.45	0.75	0.90	1

Part numbering system (example : 400V47μF)

RHD	—	400	V	470	M	K6	#	B	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol		Taping(Forming) symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)			160		200		250		350		400		450	
case (mm)			Rated capacitance (μF)	Rated ripple current (mArms)	Rated capacitance (μF)	Rated ripple current (mArms)	Rated capacitance (μF)	Rated ripple current (mArms)	Rated capacitance (μF)	Rated ripple current (mArms)	Rated capacitance (μF)	Rated ripple current (mArms)	Rated capacitance (μF)	Rated ripple current (mArms)
φD	L	Symbol												
10	12.5	H3	22	360	10	300	6.8	250	4.7	270	3.3	245	3.3	245
			27	380	12	340	8.2	270	5.6	285	4.7	270	3.9	255
			33	405	22	360	10	300	6.8	305	6.8	305	4.7	270
10	16	H4	39	665	15	595	22	570	10	565	10	500	6.8	445
			47	730	27	580			12	595	12	595	10	500
					33	640								
10	20	H5	56	830	39	725	33	700	15	620	15	620	12	575
			68	895	47	780			22	690	18	650	15	620
10	25	H6	82	1090	56	945	39	825	27	815	22	765	18	725
					68	1015	47	885			27	815		
10	30	H7	100	1345	82	1250	56	1080	33	935	33	935	22	835
12.5	20	I5	100	1495	68	1295	47	1125	27	985	22	925	18	870
					82	1385	56	1200	33	1040	27	985	22	925
12.5	25	I6	120	1645	100	1540	68	1330	39	1160	33	1075	27	1055
			150	1790			82	1430	47	1245	39	1160		
12.5	30	I7	180	1970	120	1695	100	1590	56	1300	47	1220	33	1095
													39	1135
													47	1220
12.5	35	I8	220	2140	150	1865	120	1700	68	1420	56	1320	–	–
12.5	40	I9	270	2580	180	2225	150	2090	82	1690	68	1575	56	1465
16	20	J5	100	1710	68	1485	47	1290	33	1185	22	1055	22	1055
			150	1995	82	1590	68	1485	47	1320	33	1185	27	1120
					100	1710	82	1590					33	1185
			180	2125	120	1830	100	1710	56	1405	47	1320	39	1195
16	25	J6	220	2320	150	2020	120	1855	68	1525	56	1420	47	1330
					180	2155			82	1640	68	1525		
16	31.5	J7	270	2640	220	2450	150	2135	100	1865	82	1730	56	1500
			330	3000	270	2640	180	2280					68	1615
16	35.5	J8	390	3330	–	–	220	2530	120	2000	100	1875	82	1740
16	40	J9	470	3775	330	3120	270	2805	150	2300	120	2110	82	1835
													100	1975
18	20	K5	220	2235	150	1950	120	1790	68	1485	39	1205	47	1295
					180	2080			82	1590	56	1380	56	1380
											68	1485		
18	25	K6	270	2540	220	2380	150	2055	100	1840	82	1710	68	1595
			330	2725	270	2540	180	2190						
18	31.5	K7	390	2985	330	2865	220	2445	120	2035	100	1905	82	1765
			470	3185					150	2215	120	2035	100	1905
18	35.5	K8	–	–	390	3095	270	2730	180	2450	150	2300	120	2110
18	40	K9	560	4070	470	3465	330	3085	220	2720	–	–	150	2420
18	45	KA	680	4140	560	3755	–	–	–	–	180	2655	–	–
18	50	KB	820	4595	–	–	390	3605	270	3305	220	3065	180	2850
							470	3840						
20	40	L9	680	3850	560	3735	390	3220	–	–	180	2550	–	–
20	45	LA	820	4435	680	4320	470	3705	270	3190	220	2960	180	2750
20	50	LB	1000	5115	–	–	560	4225	330	3685	–	–	220	3175
22	40	N9	820	4270	680	4160	470	3570	270	3070	220	2850	180	2650
22	45	NA	1000	4945	–	–	560	4085	330	3560	–	–	220	3070
22	50	NB	–	–	820	4995	680	4695	–	–	270	3450	270	3550

(Note) Rated ripple current : 105℃ , 100kHz

125°C Use, Miniature, Low ESR Capacitors

GREEN CAP | Low ESR | 125°C 5000hours | Anti-cleaning solvent

- Smaller and low ESR than RK series.
- Guarantees 5000 hours at 125℃ (φ8 : 2000 hours)
  (φ10 , 63 to 100V 20 to 25L : 3000 hours)

Miniaturized, Low ESR

RKD ⇦ RK

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +125
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF), V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 10, 16, 25, 35, 50, 63, 80, 100 tanδ (max.): 0.20, 0.16, 0.14, 0.12, 0.10, 0.10, 0.08, 0.08 0.02 is added to every 1000μF increase over 1000μF. (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 10, 16, 25, 35, 50, 63, 80, 100 Impedance ratio (max.) Z−40℃/Z+20℃: 4, 3, 3, 3, 3, 3, 3, 3 (120Hz)
Endurance (125℃) (Applied ripple current)	Test time: 5000 hours (φ8 : 2000 hours) (φ10 , 63 to 100V 20 to 25L : 3000 hours) Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 300% or less of the initial specified value
Shelf life (125℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

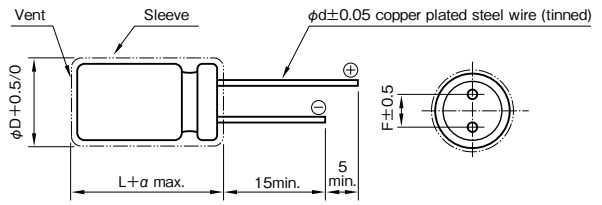

φD	8	10	12.5	16	18	20
F	3.5	5.0	5.0	7.5	7.5	10.0
φd	0.6	0.6	0.6	0.8	0.8	1.0
α	1.0	2.0	2.0	2.0	2.0	2.0

(Note) Whisker preventive structure is possible.

Coefficient of Frequency for Rated Ripple Current

Rated capacitance (μF) \ Frequency (Hz)	50・60	120	1k	10k・100k
100 to 330	0.55	0.65	0.85	1
390 to 1000	0.70	0.75	0.90	1
1200 to 8200	0.80	0.85	0.95	1

Part numbering system (example : 10V1000μF)

RKD	—	10	V	102	M	H5	#	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping(Forming) symbol

If it is whisker preventive structure, should change "#" into "G".

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	10				16				25				35			
	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)
100	–	–	–	–	8×12	G3	0.153	501	8×12	G3	0.153	501	8×12	G3	0.153	501
220	8×12	G3	0.153	501	8×12	G3	0.153	501	8×12	G3	0.153	501	10×12.5	H3	0.098	732
					10×12.5	H3	0.098	732	10×12.5	H3	0.098	732	10×16	H4	0.075	953
330	8×12	G3	0.153	501	8×12	G3	0.153	501	10×12.5	H3	0.098	732	10×16	H4	0.075	953
	10×12.5	H3	0.098	732	10×12.5	H3	0.098	732	10×16	H4	0.075	953	10×20	H5	0.057	1140
470	10×12.5	H3	0.098	732	10×16	H4	0.075	953	10×16	H4	0.075	953	10×20	H5	0.057	1140
													12.5×20	I5	0.040	1820
									10×20	H5	0.057	1140	16×16	J4	0.044	1930
1000	10×20	H5	0.057	1140	10×20	H5	0.057	1140	12.5×20	I5	0.040	1820	12.5×25	I6	0.032	2400
					12.5×20	I5	0.040	1820	12.5×25	I6	0.032	2400	16×25	J6	0.024	3100
	12.5×15	I4	0.059	1380	16×16	J4	0.044	1930	16×16	J4	0.044	1930	18×20	K5	0.029	2490
1200	–	–	–	–	–	–	–	–	12.5×20	I5	0.040	1820	12.5×30	I7	0.029	2560
													16×20	J5	0.032	2280
1500	–	–	–	–	–	–	–	–	–	–	–	–	12.5×35	I8	0.023	2970
													16×31.5	J7	0.020	3160
													18×25	K6	0.022	3200
1800	–	–	–	–	–	–	–	–	12.5×25	I6	0.032	2400	12.5×40	I9	0.020	3600
									16×20	J5	0.032	2280	16×25	J6	0.024	3100
2200	12.5×25	I6	0.032	2400	12.5×25	I6	0.032	2400	12.5×30	I7	0.029	2560	16×31.5	J7	0.020	3160
	16×20	J5	0.032	2280	16×25	J6	0.024	3100	16×25	J6	0.024	3100	16×35.5	J8	0.019	3590
	18×16	K4	0.041	2170	18×20	K5	0.029	2490	18×20	K5	0.029	2490	18×25	K6	0.022	3200
2700	–	–	–	–	–	–	–	–	12.5×35	I8	0.023	2970	16×35.5	J8	0.019	3590
									16×25	J6	0.024	3100	18×31.5	K7	0.018	3410
									18×20	K5	0.029	2490	20×25	L6	0.022	3500
3300	16×25	J6	0.024	3100	16×31.5	J7	0.020	3160	12.5×40	I9	0.020	3600	16×40	J9	0.017	4300
													18×35.5	K8	0.017	4200
	18×20	K5	0.029	2490	18×25	K6	0.022	3200	16×31.5	J7	0.020	3160	20×30	L7	0.019	4000
3900	–	–	–	–	–	–	–	–	16×35.5	J8	0.019	3590	–	–	–	–
									18×25	K6	0.022	3200				
4700	16×31.5	J7	0.020	3160	16×35.5	J8	0.019	3590	18×35.5	K8	0.017	4200	18×40	K9	0.016	4600
	18×25	K6	0.022	3200	18×31.5	K7	0.018	3410	20×25	L6	0.022	3500	20×35.5	L8	0.016	4700
5600	–	–	–	–	–	–	–	–	16×40	J9	0.017	4300	20×40	L9	0.015	5100
									18×35.5	K8	0.017	4200				
									20×30	L7	0.019	4000				
6800	–	–	–	–	–	–	–	–	18×40	K9	0.016	4600	–	–	–	–
									20×35.5	L8	0.016	4700				
8200	–	–	–	–	–	–	–	–	20×40	L9	0.015	5100	–	–	–	–

Rated voltage (V) / Item / Rated capacitance (μF)	50				63				80				100			
	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)
220	10×20	H5	0.081	960	–	–	–	–	–	–	–	–	16×20	J5	0.11	1580
330	–	–	–	–	–	–	–	–	16×20	J5	0.11	1790	16×25	J6	0.079	1690
470	12.5×20	I5	0.057	1500	16×20	J5	0.085	1790	16×25	J6	0.079	2030	16×35.5	J8	0.052	2500
560	–	–	–	–	–	–	–	–	18×25	K6	0.064	2280	16×40	J9	0.045	2700
820	12.5×30	I7	0.038	2150	16×31.5	J7	0.053	2330	18×35.5	K8	0.044	2890	18×40	K9	0.039	2880
1000	16×25	J6	0.031	2620	16×35.5	J8	0.044	2580	18×40	K9	0.039	3210	–	–	–	–
1800	18×31.5	K7	0.025	3140	18×40	K9	0.032	3210	–	–	–	–	–	–	–	–
2200	18×35.5	K8	0.022	3510	–	–	–	–	–	–	–	–	–	–	–	–

(Note) Rated ripple current : 125℃ , 100kHz ; ESR : 20℃ , 100kHz

135°C Use, Miniature, Low ESR Capacitors

GREEN CAP | Low ESR | 135°C 3000hours | Anti-cleaning solvent

- High temperature guaranteed and low ESR series for automotive.
- Guarantees 3000 hours at 135℃. (φ10 : 2000 hours)

RKB

High temperature

RKD

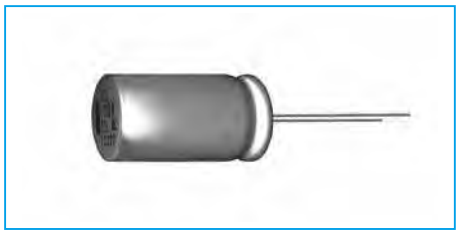

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +135
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF), V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 10, 16, 25, 35, 50, 63, 80, 100 tanδ (max.): 0.20, 0.16, 0.14, 0.12, 0.10, 0.10, 0.08, 0.08 0.02 is added to every 1000μF increase over 1000μF. (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 10, 16, 25, 35, 50, 63, 80, 100 Impedance ratio (max.) Z−40℃/Z+20℃: 4, 3, 3, 3, 3, 3, 3, 3 (120Hz)
Endurance (135℃) (Applied ripple current)	Test time: 3000 hours (φ10 : 2000 hours) Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 300% or less of the initial specified value
Shelf life (135℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

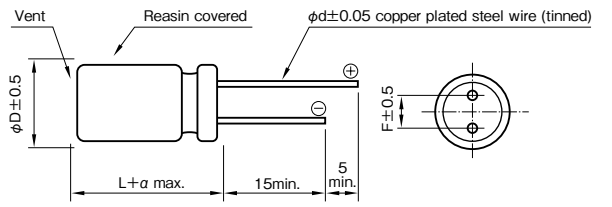

φD	10	12.5	16	18
F	5.0	5.0	7.5	7.5
φd	0.6	0.6	0.8	0.8
α	2.0	2.0	2.0	2.0

Coefficient of Frequency for Rated Ripple Current

Rated capacitance (μF) \ Frequency (Hz)	50・60	120	1k	10k・100k
220 to 330	0.55	0.65	0.85	1
470 to 1000	0.70	0.75	0.90	1
1200 to 6800	0.80	0.85	0.95	1

Part numbering system (example : 10V1000μF)

RKB	—	10	V	102	M	H5	#	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping(Forming) symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Rated capacitance (μF) / Item	10				16				25				35			
	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)
220	—	—	—	—	10×12.5	H3	0.098	725	10×12.5	H3	0.098	725	10×12.5	H3	0.098	725
													10×16	H4	0.075	951
330	10×12.5	H3	0.098	725	10×12.5	H3	0.098	725	10×12.5	H3	0.098	725	10×16	H4	0.075	951
									10×16	H4	0.075	951	10×20	H5	0.057	1130
470	10×12.5	H3	0.098	725	10×16	H4	0.075	951	10×16	H4	0.075	951	10×20	H5	0.057	1130
									10×20	H5	0.057	1130	12.5×20	I5	0.040	1550
1000	10×20	H5	0.057	1130	10×20	H5	0.057	1130	12.5×20	I5	0.040	1550	12.5×25	I6	0.032	1880
	12.5×15	I4	0.059	1130	12.5×20	I5	0.040	1550	12.5×25	I6	0.032	1880				
1200	—	—	—	—	—	—	—	—	12.5×20	I5	0.040	1550	12.5×30	I7	0.029	2160
													16×20	J5	0.032	2020
1500	—	—	—	—	—	—	—	—	—	—	—	—	12.5×35	I8	0.023	2580
1800	—	—	—	—	—	—	—	—	12.5×25	I6	0.032	1880	12.5×40	I9	0.020	2920
									16×20	J5	0.032	2020	16×25	J6	0.024	2550
2200	12.5×25	I6	0.032	1880	12.5×25	I6	0.032	1880	12.5×30	I7	0.029	2160	16×31.5	J7	0.020	3040
	16×20	J5	0.032	2020	16×25	J6	0.024	2550	16×25	J6	0.024	2550	16×35.5	J8	0.019	3280
2700	—	—	—	—	—	—	—	—	12.5×35	I8	0.023	2580	16×35.5	J8	0.019	3280
									16×25	J6	0.024	2550	18×31.5	K7	0.018	3410
3300	16×25	J6	0.024	2550	16×31.5	J7	0.020	3040	12.5×40	I9	0.020	2920	16×40	J9	0.017	3630
	18×20	K5	0.029	2320	18×25	K6	0.022	2880	16×31.5	J7	0.020	3040	18×35.5	K8	0.017	3710
4700	16×31.5	J7	0.020	3040	16×35.5	J8	0.019	3280	16×35.5	J8	0.019	3280	18×40	K9	0.016	4000
	18×25	K6	0.022	2880	18×31.5	K7	0.018	3410	18×31.5	K7	0.018	3410				
5600	—	—	—	—	—	—	—	—	16×40	J9	0.017	3630	—	—	—	—
6800	—	—	—	—	—	—	—	—	18×40	K9	0.016	4000	—	—	—	—

Rated voltage (V) / Rated capacitance (μF) / Item	50				63				80				100			
	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)
220	10×20	H5	0.098	930	–	–	–	–	–	–	–	–	16×20	J5	0.131	1070
330	–	–	–	–	–	–	–	–	16×20	J5	0.131	1070	16×25	J6	0.097	1350
470	12.5×20	I5	0.070	1170	16×20	J5	0.099	1230	16×25	J6	0.097	1350	16×35.5	J8	0.077	1740
560	–	–	–	–	–	–	–	–	18×25	K6	0.088	1530	16×40	J9	0.069	1940
820	12.5×30	I7	0.047	1680	16×31.5	J7	0.062	1850	18×35.5	K8	0.069	1980	18×40	K9	0.066	2120
1000	16×25	J6	0.039	1990	16×35.5	J8	0.058	2010	18×40	K9	0.066	2120	–	–	–	–
1800	18×31.5	K7	0.030	2670	18×40	K9	0.053	2350	–	–	–	–	–	–	–	–
2200	18×35.5	K8	0.028	2900	–	–	–	–	–	–	–	–	–	–	–	–

(Note) Rated ripple current : 135℃ , 100kHz ; ESR : 20℃ , 100kHz

135°C Use, High CV, Low ESR Capacitors

GREEN CAP | Low ESR | 135°C 3000hours | Anti-cleaning solvent

- High temperature guaranteed for automotive.
- Guaranteed 3000 hours at 135℃.
  (63V to 100V : 2000 hours)
- High CV, high ripple current.
- For ECU of Direct injection engine, ESP etc.

RKC

High CV
High ripple

RKB

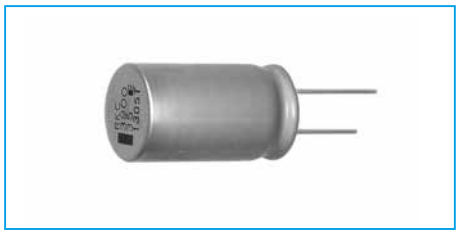

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +135
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF), V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 25, 35, 50, 63, 80, 100 tanδ (max.): 0.14, 0.12, 0.10, 0.10, 0.08, 0.08 0.02 is added to every 1000μF increase over 1000μF. (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 25, 35, 50, 63, 80, 100 Impedance ratio (max.) Z−40℃/Z+20℃: 3, 3, 3, 3, 3, 3 (120Hz)
Endurance 1 (135℃) (Applied ripple current)	Test time: 3000 hours (63V to 100V : 2000 hours) Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 300% or less of the initial specified value
Endurance 2 (125℃) (Applied ripple current)	Test time: 3000 hours (63V to 100V : 2000 hours) Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 300% or less of the initial specified value
Shelf life (135℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

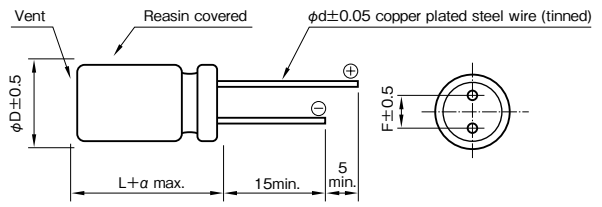

φD	12.5	16	18
F	5.0	7.5	7.5
φd	0.6	0.8	0.8
α	2.0	2.0	2.0

Coefficient of Frequency for Rated Ripple Current

Rated capacitance (μF) \ Frequency (Hz)	50・60	120	1k	10k・100k
160 to 360	0.55	0.65	0.85	1
390 to 1000	0.70	0.75	0.90	1
1100 to 12000	0.80	0.85	0.95	1

Part numbering system (example : 25V2000μF)

RKC	—	25	V	202	M	I5	#	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping(Forming) symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	25						35						50					
	Case φD × L (mm)	Casing symbol	ESR (Ω max. / 100kHz) 20℃	ESR (Ω max. / 100kHz) -40℃	Rated ripple current (mArms / 100kHz) 135℃	Rated ripple current (mArms / 100kHz) 125℃	Case φD × L (mm)	Casing symbol	ESR (Ω max. / 100kHz) 20℃	ESR (Ω max. / 100kHz) -40℃	Rated ripple current (mArms / 100kHz) 135℃	Rated ripple current (mArms / 100kHz) 125℃	Case φD × L (mm)	Casing symbol	ESR (Ω max. / 100kHz) 20℃	ESR (Ω max. / 100kHz) -40℃	Rated ripple current (mArms / 100kHz) 135℃	Rated ripple current (mArms / 100kHz) 125℃
620	—	—	—	—	—	—	—	—	—	—	—	—	12.5 × 20	I5	0.073	0.88	1470	2400
820	—	—	—	—	—	—	—	—	—	—	—	—	12.5 × 25	I6	0.058	0.67	2260	3350
1000	—	—	—	—	—	—	—	—	—	—	—	—	16 × 20	J5	0.050	0.55	1870	2960
1100	—	—	—	—	—	—	—	—	—	—	—	—	12.5 × 30	I7	0.048	0.52	2520	4220
1300	—	—	—	—	—	—	12.5 × 20	I5	0.042	0.48	1690	2760	12.5 × 35	I8	0.042	0.44	2780	4810
													16 × 25	J6	0.042	0.44	2500	4040
													18 × 20	K5	0.042	0.44	2110	3130
1600	—	—	—	—	—	—	—	—	—	—	—	—	12.5 × 40	I9	0.037	0.36	3020	5240
													16 × 31.5	J7	0.035	0.36	2960	5130
1800	—	—	—	—	—	—	12.5 × 25	I6	0.033	0.30	2010	3480	18 × 25	K6	0.033	0.32	2530	4230
2000	12.5 × 20	I5	0.042	0.48	1690	2760	16 × 20	J5	0.035	0.27	2160	3040	—	—	—	—	—	—
2200	—	—	—	—	—	—	12.5 × 30	I7	0.028	0.24	2900	4490	16 × 35.5	J8	0.029	0.27	3160	5480
2400	—	—	—	—	—	—	18 × 20	K5	0.034	0.22	2320	3250	18 × 31.5	K7	0.028	0.25	3020	5240
2700	—	—	—	—	—	—	12.5 × 35	I8	0.025	0.21	3190	5140	16 × 40	J9	0.025	0.22	3420	5930
3000	12.5 × 25	I6	0.033	0.30	2010	3480	16 × 25	J6	0.028	0.22	2870	4260	18 × 35.5	K8	0.024	0.20	3390	5870
3300	16 × 20	J5	0.035	0.27	2160	3040	12.5 × 40	I9	0.024	0.19	3470	5810	—	—	—	—	—	—
3600	12.5 × 30	I7	0.028	0.24	2900	4490	16 × 31.5	J7	0.023	0.18	3400	5480	18 × 40	K9	0.023	0.16	3700	6420
3900	—	—	—	—	—	—	18 × 25	K6	0.027	0.19	2900	4500	—	—	—	—	—	—
4300	18 × 20	K5	0.034	0.22	2320	3250	16 × 35.5	J8	0.020	0.14	3630	6070	—	—	—	—	—	—
4700	12.5 × 35	I8	0.025	0.21	3190	5140	18 × 31.5	K7	0.022	0.16	3470	5600	—	—	—	—	—	—
	16 × 25	J6	0.028	0.22	2870	4260												
5100	12.5 × 40	I9	0.024	0.19	3470	5810	—	—	—	—	—	—	—	—	—	—	—	—
5600	16 × 31.5	J7	0.023	0.18	3400	5480	16 × 40	J9	0.019	0.12	3930	6810	—	—	—	—	—	—
6200	—	—	—	—	—	—	18 × 35.5	K8	0.019	0.12	3750	6280	—	—	—	—	—	—
7500	16 × 35.5	J8	0.020	0.14	3630	6070	18 × 40	K9	0.018	0.10	4080	7070	—	—	—	—	—	—
	18 × 31.5	K7	0.022	0.16	3470	5600												
9100	16 × 40	J9	0.019	0.12	3930	6810	—	—	—	—	—	—	—	—	—	—	—	—
10000	18 × 35.5	K8	0.019	0.12	3750	6280	—	—	—	—	—	—	—	—	—	—	—	—
12000	18 × 40	K9	0.018	0.10	4080	7070	—	—	—	—	—	—	—	—	—	—	—	—

Rated voltage (V) / Item / Rated capacitance (μF)	63						80						100					
	Case φD × L (mm)	Casing symbol	ESR (Ω max. / 100kHz) 20℃	ESR (Ω max. / 100kHz) -40℃	Rated ripple current (mArms / 100kHz) 135℃	Rated ripple current (mArms / 100kHz) 125℃	Case φD × L (mm)	Casing symbol	ESR (Ω max. / 100kHz) 20℃	ESR (Ω max. / 100kHz) -40℃	Rated ripple current (mArms / 100kHz) 135℃	Rated ripple current (mArms / 100kHz) 125℃	Case φD × L (mm)	Casing symbol	ESR (Ω max. / 100kHz) 20℃	ESR (Ω max. / 100kHz) -40℃	Rated ripple current (mArms / 100kHz) 135℃	Rated ripple current (mArms / 100kHz) 125℃
160	—	—	—	—	—	—	—	—	—	—	—	—	12.5 × 20	I5	0.090	0.75	1410	1580
220	—	—	—	—	—	—	—	—	—	—	—	—	12.5 × 25	I6	0.068	0.55	1960	2140
270	—	—	—	—	—	—	12.5 × 20	I5	0.072	0.56	1420	1640	16 × 20	J5	0.067	0.47	1670	2050
300	—	—	—	—	—	—	—	—	—	—	—	—	12.5 × 30	I7	0.052	0.41	2330	2950
360	—	—	—	—	—	—	—	—	—	—	—	—	12.5 × 35	I8	0.045	0.35	2630	3530
													18 × 20	K5	0.061	0.35	1860	2270
390	12.5 × 20	I5	0.072	0.56	1420	1640	12.5 × 25	I6	0.052	0.39	2050	2520	16 × 25	J6	0.048	0.33	2360	2790
430	—	—	—	—	—	—	—	—	—	—	—	—	12.5 × 40	I9	0.038	0.29	2920	4140
470	—	—	—	—	—	—	16 × 20	J5	0.053	0.34	1910	2140	16 × 31.5	J7	0.041	0.27	2720	3440
510	—	—	—	—	—	—	12.5 × 30	I7	0.042	0.30	2630	3110	18 × 25	K6	0.045	0.25	2470	2920
560	12.5 × 25	I6	0.052	0.39	2050	2520	—	—	—	—	—	—	16 × 35.5	J8	0.036	0.23	2960	4190
620	—	—	—	—	—	—	12.5 × 35	I8	0.035	0.25	2970	3760	18 × 31.5	K7	0.037	0.2	2920	3920
							18 × 20	K5	0.044	0.26	2100	2350						
680	16 × 20	J5	0.053	0.34	1910	2140	16 × 25	J6	0.038	0.23	2680	2940	—	—	—	—	—	—
750	12.5 × 30	I7	0.042	0.30	2630	3110	12.5 × 40	I9	0.031	0.22	3260	4610	16 × 40	J9	0.028	0.18	3380	5020
							16 × 31.5	J7	0.034	0.20	3050	3860						
820	—	—	—	—	—	—	18 × 25	K6	0.033	0.19	2810	3080	18 × 35.5	K8	0.030	0.16	3330	4710
910	12.5 × 35	I8	0.035	0.25	2970	3760	—	—	—	—	—	—	18 × 40	K9	0.026	0.14	3560	5280
	18 × 20	K5	0.044	0.26	2100	2350												
1000	16 × 25	J6	0.038	0.23	2680	2940	16 × 35.5	J8	0.027	0.15	3420	4590	—	—	—	—	—	—
1100	12.5 × 40	I9	0.031	0.22	3260	4610	18 × 31.5	K7	0.028	0.15	3220	4080	—	—	—	—	—	—
1200	16 × 31.5	J7	0.034	0.20	3050	3860	—	—	—	—	—	—	—	—	—	—	—	—
1300	18 × 25	K6	0.033	0.19	2810	3080	16 × 40	J9	0.025	0.14	3670	5190	—	—	—	—	—	—
							18 × 35.5	K8	0.022	0.12	3690	5220						
1600	16 × 35.5	J8	0.027	0.15	3420	4590	18 × 40	K9	0.021	0.11	3820	5660	—	—	—	—	—	—
	18 × 31.5	K7	0.028	0.15	3220	4080												
1800	16 × 40	J9	0.025	0.14	3670	5190	—	—	—	—	—	—	—	—	—	—	—	—
2200	18 × 35.5	K8	0.022	0.12	3690	5220	—	—	—	—	—	—	—	—	—	—	—	—
2400	18 × 40	K9	0.021	0.11	3820	5660	—	—	—	—	—	—	—	—	—	—	—	—

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

RQA MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

150°C Miniature Capacitors

GREEN CAP | Low Impedance | 150°C 1000hours | Anti-cleaning solvent

- 150℃, High temperature guaranteed.
- Guarantees 1000 hours at 150℃.

RQA

High temperature

RKB

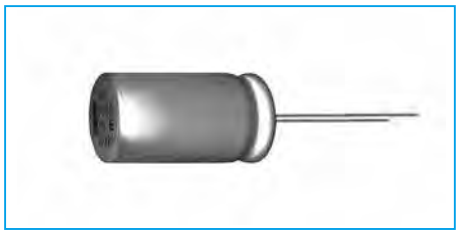

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +150
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF), V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 10, 16, 25, 35, 50, 63 tanδ (max.): 0.20, 0.16, 0.14, 0.12, 0.10, 0.10 0.02 is added to every 1000μF increase over 1000μF. (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 10, 16, 25, 35, 50, 63 Impedance ratio (max.) Z−40℃/Z+20℃: 4, 3, 3, 3, 3, 3 (120Hz)
Endurance (150℃) (Applied ripple current)	Test time: 1000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 300% or less of the initial specified value
Shelf life (150℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

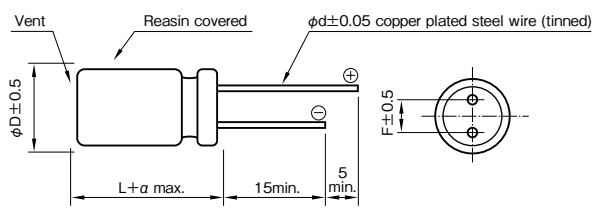

ϕD	10	12.5	16	18
F	5.0	5.0	7.5	7.5
ϕd	0.6	0.6	0.8	0.8
α	2.0	2.0	2.0	2.0

Coefficient of Frequency for Rated Ripple Current

Rated capacitance (μF) \ Frequency (Hz)	50・60	120	1k	10k・100k
220 to 330	0.55	0.65	0.85	1
470 to 1000	0.70	0.75	0.90	1
1500 to 4700	0.80	0.85	0.95	1

Part numbering system (example : 35V1000μF)

RQA	—	35	V	102	M	I6	#	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping(Forming) symbol

Standard Ratings

Rated capacitance (μF) \ Rated voltage (V) / Item	10			16			25			35		
	Case ϕD×L (mm)	Casing symbol	Rated ripple current (mArms)	Case ϕD×L (mm)	Casing symbol	Rated ripple current (mArms)	Case ϕD×L (mm)	Casing symbol	Rated ripple current (mArms)	Case ϕD×L (mm)	Casing symbol	Rated ripple current (mArms)
220	—	—	—	—	—	—	10×14.5	H3	300	10×14.5	H3	300
330	—	—	—	—	—	—	10×18	H4	510	10×18	H4	510
470	—	—	—	10×18	H4	510	10×22	H5	820	10×22	H5	820
1000	10×22	H5	820	10×22	H5	820	12.5×26	I6	1000	12.5×26	I6	1000
2200	12.5×26	I6	1000	12.5×26	I6	1000	16×26.5	J6	1200	16×33	J7	1370
3300	16×26.5	J6	1200	16×33	J7	1370	16×37	J8	1720	18×34	K7	1670
4700	16×33	J7	1370	16×37	J8	1720	18×38	K8	1790	18×42.5	K9	1870

Rated capacitance (μF) \ Rated voltage (V) / Item	50			63		
	Case ϕD×L (mm)	Casing symbol	Rated ripple current (mArms)	Case ϕD×L (mm)	Casing symbol	Rated ripple current (mArms)
470	12.5×21	I5	1070	16×26.5	J6	750
1000	16×33	J7	1250	18×34	K7	1200
1500	18×34	K7	1500	18×42.5	K9	1550
2200	18×38	K8	1700	—	—	—

(Note) Rated ripple current : 150℃ , 100kHz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

For Vibration, Resistance
Miniature Aluminum Electrolytic Capacitors

Series RPK	30G	125°C, Long Life, with NC terminal	···Page 148
Series RKE	40G	125°C, Miniature, Low ESR	···Page 150
Series RKF	40G	135°C, Miniature, Low ESR	···Page 152
Series RKG	40G	150°C, Miniature, Low ESR	···Page 154

125°C Use, Long Life Capacitors

GREEN CAP | Vibration Resistance | Low ESR | 125°C 5000hours | Anti-cleaning solvent

- Guarantees 5000 hours at 125℃.
- Best-suited to smoothing circuits and control circuits for industrial equipment power supplies of which long life and high reliability are required.
- NC terminal added items are lineup for vibration resistance. (30G guaranteed : 20mmL or less)

For vibration

RPK ⇦ RKD

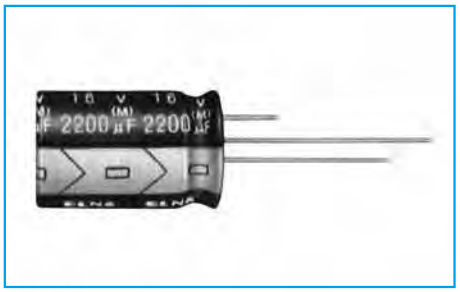

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +125
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF), V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 10, 16, 25, 35, 50, 63, 80, 100 tanδ (max.): 0.20, 0.16, 0.14, 0.12, 0.10, 0.10, 0.08, 0.08 0.02 is added to every 1000μF increase over 1000μF. (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 10, 16, 25, 35, 50, 63, 80, 100 Impedance ratio (max.) Z−40℃/Z+20℃: 4, 3, 3, 3, 3, 3, 3, 3 (120Hz)
Endurance (125℃) (Applied ripple current)	Test time: 5000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 300% or less of the initial specified value
Shelf life (125℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

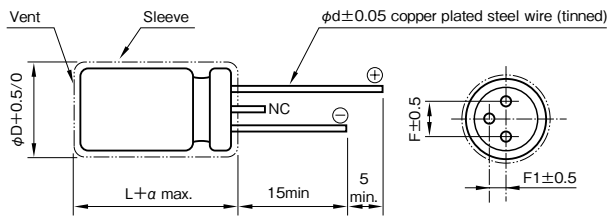

φD	12.5	16	18	20
F	5.0	7.5	7.5	10.0
F1	2.5	3.75	3.75	5.0
φd	0.8	0.8	0.8	1.0
α	2.0	2.0	2.0	2.0

(Note) Since NC terminal is not insulated, it should be mounted at a position electronically independent from all other parts of the circuit.
(Note) Whisker preventive structure is possible.

Coefficient of Frequency for Rated Ripple Current

Rated capacitance (μF) \ Frequency (Hz)	50・60	120	1k	10k・100k
220 to 330	0.55	0.65	0.85	1
390 to 1000	0.70	0.75	0.90	1
1200 to 8200	0.80	0.85	0.95	1

Part numbering system (example : 16V2200μF)

RPK	—	16	V	222	M	J6	D# —	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping(Forming) symbol

If it is whisker preventive structure, should change “#” into “G”.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	10				16				25				35			
	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)
470	–	–	–	–	–	–	–	–	–	–	–	–	12.5×20	I5	0.040	1820
1000	12.5×15	I4	0.059	1380	12.5×20	I5	0.040	1820	12.5×20	I5	0.040	1820	12.5×25	I6	0.032	2400
									12.5×25	I6	0.032	2400	16×25	J6	0.024	3100
					16×16	J4	0.044	1930	16×16	J4	0.044	1930	18×20	K5	0.029	2490
1200	–	–	–	–	–	–	–	–	12.5×20	I5	0.040	1820	12.5×30	I7	0.029	2560
													16×20	J5	0.032	2280
1500	–	–	–	–	–	–	–	–	–	–	–	–	12.5×35	I8	0.023	2970
													16×31.5	J7	0.020	3160
													18×25	K6	0.022	3200
1800	–	–	–	–	–	–	–	–	12.5×25	I6	0.032	2400	12.5×40	I9	0.020	3600
									16×20	J5	0.032	2280	16×25	J6	0.024	3100
2200	12.5×25	I6	0.032	2400	12.5×25	I6	0.032	2400	12.5×30	I7	0.029	2560	16×31.5	J7	0.020	3160
	16×20	J5	0.032	2280	16×25	J6	0.024	3100	16×25	J6	0.024	3100	16×35.5	J8	0.019	3590
	18×16	K4	0.041	2170	18×20	K5	0.029	2490	18×20	K5	0.029	2490	18×25	K6	0.022	3200
2700	–	–	–	–	–	–	–	–	12.5×35	I8	0.023	2970	16×35.5	J8	0.019	3590
									16×25	J6	0.024	3100	18×31.5	K7	0.018	3410
									18×20	K5	0.029	2490	20×25	L6	0.022	3500
3300	16×25	J6	0.024	3100	16×31.5	J7	0.020	3160	12.5×40	I9	0.020	3600	16×40	J9	0.017	4300
													18×35.5	K8	0.017	4200
	18×20	K5	0.029	2490	18×25	K6	0.022	3200	16×31.5	J7	0.020	3160	20×30	L7	0.019	4000
3900	–	–	–	–	–	–	–	–	16×35.5	J8	0.019	3590	–	–	–	–
									18×25	K6	0.022	3200				
4700	16×31.5	J7	0.020	3160	16×35.5	J8	0.019	3590	18×35.5	K8	0.017	4200	18×40	K9	0.016	4600
	18×25	K6	0.022	3200	18×31.5	K7	0.018	3410	20×25	L6	0.022	3500	20×35.5	L8	0.016	4700
5600	–	–	–	–	–	–	–	–	16×40	J9	0.017	4300	20×40	L9	0.015	5100
									18×35.5	K8	0.017	4200				
									20×30	L7	0.019	4000				
6800	–	–	–	–	–	–	–	–	18×40	K9	0.016	4600	–	–	–	–
									20×35.5	L8	0.016	4700				
8200	–	–	–	–	–	–	–	–	20×40	L9	0.015	5100	–	–	–	–

Rated voltage (V) / Item / Rated capacitance (μF)	50				63				80				100			
	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.)	Rated ripple current (mArms)
220	–	–	–	–	–	–	–	–	–	–	–	–	16×20	J5	0.11	1580
330	–	–	–	–	–	–	–	–	16×20	J5	0.11	1790	16×25	J6	0.079	1690
470	12.5×20	I5	0.057	1500	16×20	J5	0.085	1790	16×25	J6	0.079	2030	16×35.5	J8	0.052	2500
560	–	–	–	–	–	–	–	–	18×25	K6	0.064	2280	16×40	J9	0.045	2700
820	12.5×30	I7	0.038	2150	16×31.5	J7	0.053	2330	18×35.5	K8	0.044	2890	18×40	K9	0.039	2880
1000	16×25	J6	0.031	2620	16×35.5	J8	0.044	2580	18×40	K9	0.039	3210	–	–	–	–
1800	18×31.5	K7	0.025	3140	18×40	K9	0.032	3210	–	–	–	–	–	–	–	–
2200	18×35.5	K8	0.022	3510	–	–	–	–	–	–	–	–	–	–	–	–

(Note) Rated ripple current : 125℃ , 100kHz ; ESR : 20℃ , 100kHz

125˚C Use, Miniature, Low ESR, High Vibration Resistance Capacitors

GREEN CAP | High Vibration Resistance | Low ESR | 125˚C 5000hours | Anti-cleaning solvent

- Vibration resistance (40G,10 to 2000Hz, X,Y,Z = per 2hours).
- For Automotive application (ABS and electric power steering etc.)
- Guaranteed 5000 hours at 125˚C

High vibration resistance

RKE ⇦ RKD

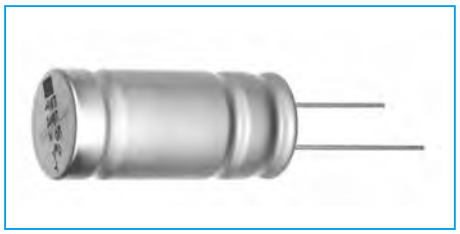

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +125
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF), V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 25 / 35 / 50 tanδ (max.): 0.14 / 0.12 / 0.10 0.02 is added to every 1000μF increase over 1000μF. (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 25 / 35 / 50 Impedance ratio (max.) Z−40℃/Z+20℃: 3 / 3 / 3 (120Hz)
Endurance (125℃) (Applied ripple current)	Test time: 5000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 300% or less of the initial specified value
Shelf life (125℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Vibration	Vibration test condition Frequency range: 10 to 2000Hz Displacement amplitude: 1.5 mm max. Acceleration: 40G (392m/s²) max. Sweep rate: 0.5 octave/min. Vibration axis and duration: X, Y, Z per 2 hours, total 6 hours Fixation: Capacitor mounted by its body which is rigidly clamped to the work surface. Specification after test Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 300% or less of the initial specified value
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

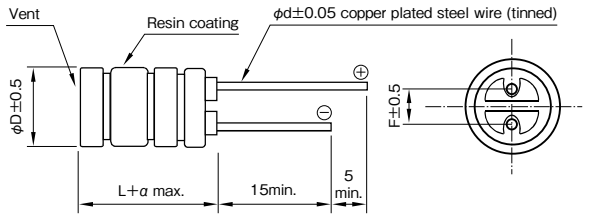

ϕD	16	18	20	22
F	7.5	7.5	10.0	10.0
ϕd	0.8	0.8	1.0	1.0
α	2.0	2.0	2.0	2.0

Coefficient of Frequency for Rated Ripple Current

Rated capacitance (μF) \ Frequency (Hz)	120	1k	10k	100k
1200 to 8200	0.85	0.95	1.00	1

Part numbering system (example : 35V2700μF)

RKE	—	35	V	272	M	K7	#	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Forming symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage(V) / Item / Rated capacitance (μF)	25					35					50				
	Case φD × L (mm)	Casing symbol	ESR (Ω max.) 20℃	ESR (Ω max.) -40℃	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.) 20℃	ESR (Ω max.) -40℃	Rated ripple current (mArms)	Case φD × L (mm)	Casing symbol	ESR (Ω max.) 20℃	ESR (Ω max.) -40℃	Rated ripple current (mArms)
1200	—	—	—	—	—	—	—	—	—	—	16×31.5	J7	0.048	0.20	2940
1500	—	—	—	—	—	16×31.5	J7	0.024	0.14	3160	16×35.5	J8	0.039	0.16	3300
2200	—	—	—	—	—	16×35.5	J8	0.023	0.13	3590	18×35.5	K8	0.033	0.15	3520
2700	16×31.5	J7	0.024	0.14	3160	18×31.5	K7	0.020	0.11	3410	—	—	—	—	—
3300	16×35.5	J8	0.023	0.13	3590	18×35.5	K8	0.019	0.10	3840	20×40	L9	0.027	0.12	3930
4700	18×31.5	K7	0.020	0.11	3410	18×40	K9	0.017	0.094	4250	—	—	—	—	—
5600	18×35.5	K8	0.019	0.10	3840	20×40	L9	0.017	0.094	4500	—	—	—	—	—
6800	18×40	K9	0.017	0.094	4250	—	—	—	—	—	—	—	—	—	—
7800	20×40	L9	0.017	0.094	4500	—	—	—	—	—	—	—	—	—	—
8200	22×40	N9	0.017	0.094	4750	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 125℃ , 100kHz ; ESR : 100kHz

RKF MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

135°C Use, Miniature, Low ESR, High Vibration Resistance Capacitors

GREEN CAP | High Vibration Resistance | Low ESR | 135°C 3000hours | Anti-cleaning solvent

- Vibration resistance (40G,10 to 2000Hz, X,Y,Z = per 2hours).
- For Automotive application (ABS and electric power steering etc.)
- Guaranteed 3000 hours at 135℃
  (63V to 100V : Guaranteed 2000 hours)

High vibration resistance

RKF ⇦ RKC

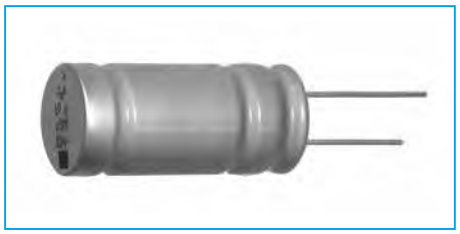

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +135
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF), V : Rated voltage (V) (20℃)

Tangent of loss angle (tanδ)

Rated voltage (V)	25	35	50	63	80	100
tanδ (max.)	0.14	0.12	0.10	0.10	0.08	0.08

0.02 is added to every 1000μF increase over 1000μF. (20℃,120Hz)

Characteristics at high and low temperature

Rated voltage (V)		25	35	50	63	80	100
Impedance ratio (max.)	Z−40℃/Z+20℃	3	3	3	3	3	3

(120Hz)

Endurance (135℃ or 125℃) (Applied ripple current)

Test time	3000 hours (63V to 100V : 2000 hours)
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±30% of initial value
Tangent of the loss angle	300% or less of the initial specified value

Shelf life (135℃): Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1

Vibration

Vibration test condition

Frequency range	10 to 2000Hz
Displacement amplitude	1.5 mm max.
Acceleration	40G (392m/s²) max.
Sweep rate	0.5 octave/min.
Vibration axis and duration	X, Y, Z per 2 hours, total 6 hours
Fixation	Capacitor mounted by its body which is rigidly clamped to the work surface.

Specification after test

Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±30% of initial value
Tangent of the loss angle	300% or less of the initial specified value

Applicable standards: JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

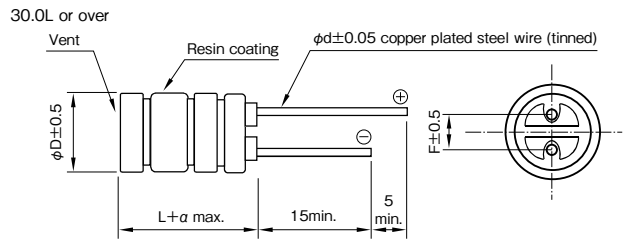

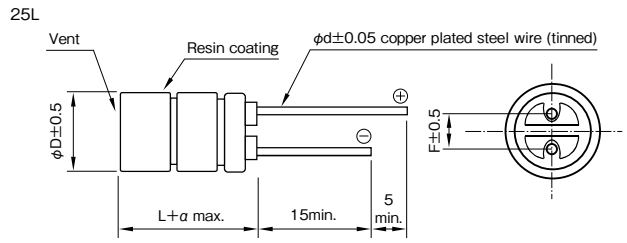

φD	12.5	16	18	20	22
F	5.0	7.5	7.5	10.0	10.0
φd	0.8	0.8	0.8	1.0	1.0
α	2.0	2.0	2.0	2.0	2.0

Coefficient of Frequency for Rated Ripple Current

Rated capacitance (μF) \ Frequency (Hz)	120	1k	10k	100k
180 to 330	0.65	0.85	1.00	1
390 to 1000	0.75	0.90	1.00	1
1100 to 10000	0.85	0.95	1.00	1

Part numbering system (example : 35V3600μF)

RKF	—	35	V	362	M	K7	#	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Forming symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)	Rated capacitanc (μF)	Case φD × L (mm)	Casing symbol	ESR (Ω max. / 100kHz) 20℃	ESR (Ω max. / 100kHz) -40℃	Rated ripple current (mArms / 100kHz) 135℃	Rated ripple current (mArms / 100kHz) 125℃
25	1800	12.5 × 25	I6	0.033	0.30	2010	3480
	2200	12.5 × 30	I7	0.028	0.24	2900	4490
	2700	12.5 × 35	I8	0.025	0.21	3190	5140
	3300	12.5 × 40	I9	0.024	0.19	3470	5810
	4700	16 × 31.5	J7	0.023	0.18	3400	5480
	5400	16 × 35.5	J8	0.020	0.14	3630	6070
	6200	16 × 40	J9	0.019	0.12	3930	6810
	6200	18 × 31.5	K7	0.022	0.16	3470	5600
	7800	18 × 35.5	K8	0.019	0.12	3750	6280
	8200	18 × 40	K9	0.018	0.10	4080	7070
	9500	20 × 40	L9	0.016	0.090	4570	7950
	10000	22 × 40	N9	0.016	0.090	5000	8700
35	1100	12.5 × 25	I6	0.033	0.30	2010	3480
	1500	12.5 × 30	I7	0.028	0.24	2900	4490
	1800	12.5 × 35	I8	0.025	0.21	3190	5140
	2000	12.5 × 40	I9	0.024	0.19	3470	5810
	2700	16 × 31.5	J7	0.023	0.18	3400	5480
	3100	16 × 35.5	J8	0.020	0.14	3630	6070
	3600	16 × 40	J9	0.019	0.12	3930	6810
	3600	18 × 31.5	K7	0.022	0.16	3470	5600
	4700	18 × 35.5	K8	0.019	0.12	3750	6280
	5400	18 × 40	K9	0.018	0.10	4080	7070
	5900	20 × 40	L9	0.016	0.090	4570	7950
	6200	22 × 40	N9	0.016	0.090	5000	8700
50	560	12.5 × 25	I6	0.079	0.39	2260	3350
	750	12.5 × 30	I7	0.065	0.30	2520	4220
	900	12.5 × 35	I8	0.057	0.25	2780	4810
	1000	12.5 × 40	I9	0.050	0.22	3020	5240
	1300	16 × 31.5	J7	0.048	0.20	2960	5130
	1600	16 × 35.5	J8	0.039	0.15	3160	5480
	1900	16 × 40	J9	0.034	0.14	3420	5930
	2000	18 × 31.5	K7	0.038	0.15	3020	5240
	2400	18 × 35.5	K8	0.033	0.12	3390	5870
	2600	18 × 40	K9	0.031	0.11	3700	6420
	3300	20 × 40	L9	0.027	0.10	4200	7260
	3300	22 × 40	N9	0.027	0.10	4420	7660

Rated voltage (V)	Rated capacitanc (μF)	Case φD × L (mm)	Casing symbol	ESR (Ω max. / 100kHz) 20℃	ESR (Ω max. / 100kHz) -40℃	Rated ripple current (mArms / 100kHz) 135℃	Rated ripple current (mArms / 100kHz) 125℃
63	390	12.5 × 25	I6	0.076	0.39	2050	2520
	560	12.5 × 30	I7	0.061	0.30	2630	3110
	650	12.5 × 35	I8	0.051	0.25	2970	3760
	750	12.5 × 40	I9	0.045	0.22	3260	4610
	1000	16 × 31.5	J7	0.049	0.20	3050	3860
	1300	16 × 35.5	J8	0.039	0.15	3420	4590
	1300	18 × 31.5	K7	0.041	0.15	3220	4080
	1500	16 × 40	J9	0.036	0.14	3670	5190
	1800	18 × 35.5	K8	0.032	0.12	3690	5220
	2000	18 × 40	K9	0.031	0.11	3820	5660
	2500	20 × 40	L9	0.026	0.10	4580	6480
	2500	22 × 40	N9	0.026	0.10	4830	6830
80	290	12.5 × 25	I6	0.076	0.39	2050	2520
	420	12.5 × 30	I7	0.061	0.30	2630	3110
	490	12.5 × 35	I8	0.051	0.25	2970	3760
	570	12.5 × 40	I9	0.045	0.22	3260	4610
	750	16 × 31.5	J7	0.049	0.20	3050	3860
	820	16 × 35.5	J8	0.039	0.15	3420	4590
	820	18 × 31.5	K7	0.041	0.15	3220	4080
	950	16 × 40	J9	0.036	0.14	3670	5190
	1200	18 × 35.5	K8	0.032	0.12	3690	5220
	1300	18 × 40	K9	0.031	0.11	3820	5660
	1500	20 × 40	L9	0.026	0.10	4580	6480
	1500	22 × 40	N9	0.026	0.10	4830	6830
100	180	12.5 × 25	I6	0.099	0.55	1960	2140
	250	12.5 × 30	I7	0.076	0.41	2330	2950
	290	12.5 × 35	I8	0.065	0.35	2630	3530
	330	12.5 × 40	I9	0.055	0.29	2920	4140
	420	16 × 31.5	J7	0.060	0.27	2720	3440
	510	16 × 35.5	J8	0.052	0.23	2960	4190
	510	18 × 31.5	K7	0.054	0.20	2920	3920
	570	16 × 40	J9	0.041	0.18	3380	5020
	680	18 × 35.5	K8	0.044	0.16	3330	4710
	820	18 × 40	K9	0.038	0.14	3560	5280
	950	20 × 40	L9	0.033	0.13	3820	5410
	1000	22 × 40	N9	0.033	0.13	4030	5700

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

RKG MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

150°C Use, Miniature, Low ESR, High Vibration Resistance Capacitors

GREEN CAP | High Vibration Resistance | Low ESR | 150°C 2000hours | Anti-cleaning solvent

- Vibration resistance (40G,10 to 2000Hz, X,Y,Z = per 2hours).
- For Automotive application (ABS and electric power steering etc.)
- Guaranteed 2000 hours at 150℃
  (63V, 80V : 1000 hours)

High vibration resistance

RKG ⇦ RQA

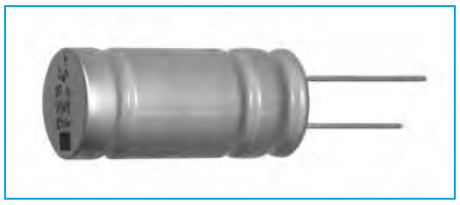

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +150
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF), V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 25, 35, 50, 63, 80 tanδ (max.): 0.14, 0.12, 0.10, 0.10, 0.08 0.02 is added to every 1000μF increase over 1000μF. (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 25, 35, 50, 63, 80 Impedance ratio (max.) Z−40℃/Z+20℃: 3, 3, 3, 3, 3 (120Hz)
Endurance (150℃ or 125℃) (Applied ripple current)	Test time: 2000 hours (63V, 80V : 1000 hours) Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 300% or less of the initial specified value
Shelf life (150℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Vibration	Vibration test condition Frequency range: 10 to 2000Hz Displacement amplitude: 1.5 mm max. Acceleration: 40G (392m/s²) max. Sweep rate: 0.5 octave/min. Vibration axis and duration: X, Y, Z per 2 hours, total 6 hours Fixation: Capacitor mounted by its body which is rigidly clamped to the work surface. Specification after test Leakage current: The initial specified value or less Percentage of capacitance change: Within ±30% of initial value Tangent of the loss angle: 300% or less of the initial specified value
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

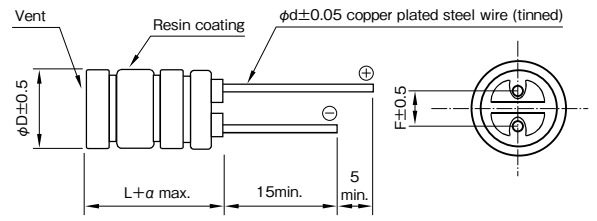

ϕD	18	20	22
F	7.5	10.0	10.0
ϕd	0.8	1.0	1.0
α	2.0	2.0	2.0

Coefficient of Frequency for Rated Ripple Current

Rated capacitance (μF) \ Frequency (Hz)	120	1k	10k	100k
800 to 1000	0.75	0.90	1.00	1
1100 to 4700	0.85	0.95	1.00	1

Part numbering system (example : 35V2700μF)

RKG	—	35	V	272	M	K9	#	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Forming symbol

Standard Ratings

Rated capacitance (μF) \ Rated voltage (V) / Item	25						35						50					
	Case ϕD × L (mm)	Casing symbol	ESR (Ω max. / 100kHz) 20℃	ESR -40℃	Rated ripple current (mArms / 100kHz) 150℃	125℃	Case ϕD × L (mm)	Casing symbol	ESR 20℃	ESR -40℃	Rated ripple current 150℃	125℃	Case ϕD × L (mm)	Casing symbol	ESR 20℃	ESR -40℃	Rated ripple current 150℃	125℃
1800	—	—	—	—	—	—	—	—	—	—	—	—	18 × 42	K9	0.034	0.19	2800	7000
2400	—	—	—	—	—	—	—	—	—	—	—	—	20 × 42	L9	0.030	0.17	3200	9000
													22 × 42	N9	0.030	0.17	3400	9500
2700	—	—	—	—	—	—	18 × 42	K9	0.020	0.11	3100	8000	—	—	—	—	—	—
3300	—	—	—	—	—	—	20 × 42	L9	0.018	0.10	3500	10000	—	—	—	—	—	—
							22 × 42	N9	0.018	0.10	3700	10500						
3900	18 × 42	K9	0.020	0.11	3100	8000	—	—	—	—	—	—	—	—	—	—	—	—
4700	20 × 42	L9	0.018	0.10	3500	10000	—	—	—	—	—	—	—	—	—	—	—	—
	22 × 42	N9	0.018	0.10	3700	10500												

Rated capacitance (μF) \ Rated voltage (V) / Item	63						80					
	Case ϕD × L (mm)	Casing symbol	ESR (Ω max. / 100kHz) 20℃	ESR -40℃	Rated ripple current (mArms / 100kHz) 150℃	125℃	Case ϕD × L (mm)	Casing symbol	ESR 20℃	ESR -40℃	Rated ripple current 150℃	125℃
800	—	—	—	—	—	—	18 × 42	K9	0.034	0.19	2900	7300
1000	—	—	—	—	—	—	20 × 42	L9	0.029	0.16	3300	9300
1100	—	—	—	—	—	—	22 × 42	N9	0.029	0.16	3500	9800
1200	18 × 42	K9	0.034	0.19	2900	7300	—	—	—	—	—	—
1500	20 × 42	L9	0.029	0.16	3300	9300	—	—	—	—	—	—
1800	22 × 42	N9	0.029	0.16	3500	9800	—	—	—	—	—	—

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Aluminum Electrolytic Capacitors

Conductive Polymer Hybrid Aluminum Electrolytic Capacitors

Aluminum Electrolytic Capacitors With Conductive Polymer Solid Electrolyte

Chip Type Aluminum Electrolytic Capacitors

Miniature Type Aluminum Electrolytic Capacitors

Large Capacitance Aluminum Electrolytic Capacitors

Aluminum Electrolytic Capacitors for Audio

LA5, LT5 LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS ELNA®

PCB Snap-In Miniaturized Capacitors

GREEN CAP

- 20mm-tall products for every diameter of φ22 to φ35 are now offered in series.
- As many as 4 case sizes available for the same rating.

Marking color : White print on a black sleeve

Miniaturized, High ripple — Miniaturized, High ripple, Long life

LA5 ⇦ (LA4) ⇦ (LA3)

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85 (450V is at −25 to +85)
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	$3\sqrt{CV}$ (after 5 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	
Characteristics at high and low temperature	
Endurance (85℃) (Applied ripple current)	
Shelf life (85℃)	
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Tangent of loss angle (tanδ):

Rated voltage (V)	10	16	25	35	50	63 to 100
tanδ (max.)	0.80	0.60	0.50	0.40	0.30	0.20

tanδ (max.) φD (mm) \ Rated voltage (V)	160 to 250	315 to 450
22 to 30	0.10	0.15
35	0.15	0.15

(20℃,120Hz)

Characteristics at high and low temperature:

Rated voltage (V)		10	16 to 35	50 to 100	160 to 200	250 to 400	450
Impedance ratio (max.)	Z−25℃/Z+20℃	5	4	3	3	4	4
	Z−40℃/Z+20℃	18	15	10	6	8	—

(120Hz)

Endurance (85℃) (Applied ripple current):

Test time	2000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	200% or less of the initial specified value

Shelf life (85℃):

Test time	1000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±15% of initial value
Tangent of the loss angle	150% or less of the initial specified value

Voltage application treatment : According to JIS C5101-4 4.1

Outline Drawing

Unit : mm

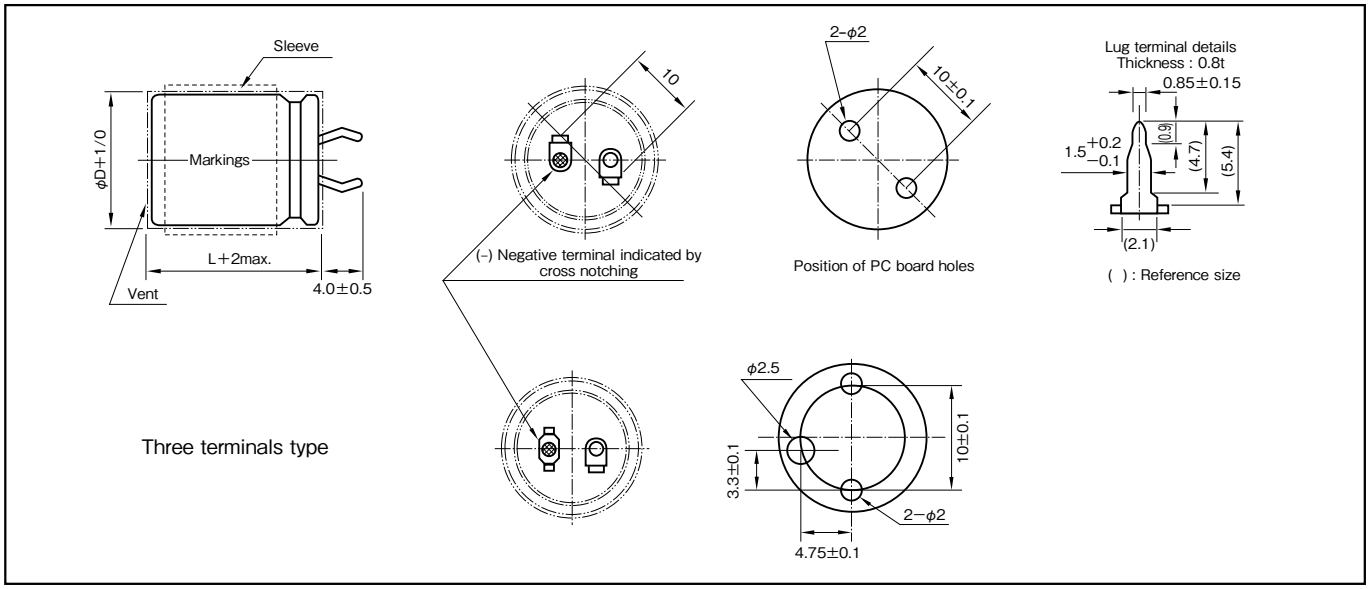

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50	120	1k	10k	20k
100 or less	0.95	1	1.10	1.15	1.15
160 to 250	0.81	1	1.32	1.45	1.50
315 or more	0.77	1	1.30	1.41	1.43

Part numbering system

series LA5, standard terminal type :400V330μF

LA5	400	V	331	M	S43	#	B
Series code	Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol

series LT5, three terminals type :400V330μF

LT5	—	400	V	331	M	S43	#	B
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
10	8200	22	20	S21	2.00
	10000	22	20	S21	2.21
	12000	22	20	S21	2.42
	12000	22	25	S22	2.50
	12000	25	20	S31	2.50
	15000	22	25	S22	2.80
	15000	22	30	S23	3.00
	15000	25	20	S31	2.80
	18000	22	25	S22	3.06
	18000	22	30	S23	3.29
	18000	25	20	S31	3.06
	18000	25	25	S32	3.20
	18000	30	20	S41	3.30
	22000	22	30	S23	3.63
	22000	22	35	S24	3.70
	22000	25	25	S32	3.54
	22000	25	30	S33	3.70
	22000	30	20	S41	3.65
	22000	35	20	S51	3.90
	27000	22	35	S24	3.90
	27000	22	40	S25	4.10
	27000	22	45	S26	4.30
	27000	25	25	S32	3.92
	27000	25	30	S33	4.10
	27000	25	35	S34	4.20
	27000	30	20	S41	4.04
	27000	30	25	S42	4.20
	27000	35	20	S51	4.32
	33000	22	35	S24	4.53
	33000	22	40	S25	4.54
	33000	22	50	S27	4.90
	33000	25	30	S33	4.53
	33000	25	35	S34	4.64
	33000	25	40	S35	4.80
	33000	30	25	S42	4.64
	33000	30	30	S43	4.90
	33000	35	20	S51	4.78
	33000	35	25	S52	5.00
	39000	22	40	S25	4.93
	39000	22	45	S26	5.17
	39000	25	35	S34	5.05
	39000	25	40	S35	5.22
	39000	25	45	S36	5.40
	39000	30	25	S42	5.05
	39000	30	30	S43	5.33
	39000	30	35	S44	5.50
	39000	35	25	S52	5.44
	47000	22	50	S27	5.85
	47000	25	40	S35	5.73
	47000	25	45	S36	5.93
	47000	25	50	S37	6.00
	47000	30	30	S43	5.85
	47000	30	35	S44	6.04
	47000	30	40	S45	6.10

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
10	47000	35	25	S52	5.97
	47000	35	30	S53	6.20
	56000	25	45	S36	6.47
	56000	25	50	S37	6.55
	56000	30	35	S44	6.59
	56000	30	40	S45	6.66
	56000	30	45	S46	6.90
	56000	35	30	S53	6.77
	56000	35	35	S54	7.00
	68000	25	50	S37	7.22
	68000	30	40	S45	7.34
	68000	30	45	S46	7.60
	68000	30	50	S47	7.70
	68000	35	30	S53	7.46
	68000	35	35	S54	7.71
	68000	35	40	S55	7.90
	82000	30	45	S46	8.35
	82000	30	50	S47	8.46
	82000	35	35	S54	8.47
	82000	35	40	S55	8.68
	82000	35	45	S56	8.90
	100000	30	50	S47	9.34
	100000	35	40	S55	9.58
	100000	35	50	S57	10.20
	120000	35	45	S56	10.80
	120000	35	50	S57	11.20
	150000	35	50	S57	12.50
16	5600	22	20	S21	1.90
	6800	22	20	S21	2.09
	8200	22	20	S21	2.21
	8200	22	25	S22	2.40
	8200	25	20	S31	2.30
	10000	22	25	S22	2.65
	10000	25	20	S31	2.54
	12000	22	25	S22	2.78
	12000	22	30	S23	3.00
	12000	25	20	S31	2.78
	12000	25	25	S32	2.90
	12000	30	20	S41	3.00
	15000	22	30	S23	3.35
	15000	22	35	S24	3.40
	15000	25	25	S32	3.24
	15000	25	30	S33	3.40
	15000	30	20	S41	3.35
	15000	35	20	S51	3.70
	18000	22	30	S23	3.67
	18000	22	35	S24	3.72
	18000	22	40	S25	3.90
	18000	25	25	S32	3.55
	18000	25	30	S33	3.72
	18000	25	35	S34	3.90
	18000	30	20	S41	3.67
	18000	30	25	S42	3.90
	18000	35	20	S51	4.05

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
16	22000	22	35	S24	4.12
	22000	22	40	S25	4.31
	22000	22	50	S27	4.50
	22000	25	30	S33	4.12
	22000	25	35	S34	4.31
	22000	25	40	S35	4.40
	22000	30	25	S42	4.31
	22000	30	30	S43	4.40
	22000	35	20	S51	4.48
	22000	35	25	S52	4.60
	27000	22	40	S25	4.78
	27000	22	45	S26	4.90
	27000	25	35	S34	4.78
	27000	25	40	S35	4.87
	27000	25	45	S36	5.00
	27000	30	25	S42	4.78
	27000	30	30	S43	4.87
	27000	30	35	S44	5.10
	27000	35	25	S52	5.10
	33000	22	45	S26	5.41
	33000	22	50	S27	5.51
	33000	25	40	S35	5.39
	33000	25	45	S36	5.53
	33000	30	30	S43	5.39
	33000	30	35	S44	5.64
	33000	30	40	S45	5.80
	33000	35	25	S52	5.63
	33000	35	30	S53	5.80
	39000	25	45	S36	6.01
	39000	25	50	S37	6.27
	39000	30	35	S44	6.13
	39000	30	40	S45	6.31
	39000	30	45	S46	6.40
	39000	35	30	S53	6.31
	39000	35	35	S54	6.50
	47000	25	50	S37	6.88
	47000	30	40	S45	6.92
	47000	30	45	S46	7.03
	47000	30	50	S47	7.20
	47000	35	30	S53	6.92
	47000	35	35	S54	7.14
	47000	35	40	S55	7.40
	56000	30	45	S46	7.67
	56000	30	50	S47	7.86
	56000	35	35	S54	7.79
	56000	35	40	S55	8.08
	56000	35	45	S56	8.20
	68000	30	50	S47	8.66
	68000	35	40	S55	8.90
	68000	35	45	S56	9.04
	82000	35	45	S56	9.92
	82000	35	50	S57	10.30
	100000	35	50	S57	11.40

(Note) Rated ripple current : 85℃ , 120Hz ; ESR. : 20℃ , 120Hz

• The standard ratings follow the next page.

LA5, LT5 LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS ELNA®

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
25	3900	22	20	S21	1.80
	4700	22	20	S21	1.98
	5600	22	20	S21	2.16
	5600	22	25	S22	2.30
	5600	25	20	S31	2.20
	6800	22	25	S22	2.53
	6800	25	20	S31	2.42
	8200	22	25	S22	2.78
	8200	22	30	S23	2.80
	8200	25	20	S31	2.66
	8200	25	25	S32	2.80
	8200	30	20	S41	2.90
	10000	22	30	S23	3.09
	10000	22	35	S24	3.20
	10000	25	25	S32	3.09
	10000	25	30	S33	3.20
	10000	30	20	S41	3.20
	10000	35	20	S51	3.50
	12000	22	30	S23	3.39
	12000	22	35	S24	3.51
	12000	22	40	S25	3.70
	12000	25	25	S32	3.39
	12000	25	30	S33	3.51
	12000	25	35	S34	3.70
	12000	30	20	S41	3.51
	12000	30	25	S42	3.70
	12000	35	20	S51	3.83
	15000	22	35	S24	3.92
	15000	22	40	S25	4.14
	15000	22	50	S27	4.30
	15000	25	30	S33	3.92
	15000	25	35	S34	4.14
	15000	25	40	S35	4.20
	15000	30	25	S42	4.14
	15000	30	30	S43	4.30
	15000	35	20	S51	4.29
	15000	35	25	S52	4.40
	18000	22	40	S25	4.53
	18000	22	45	S26	4.62
	18000	25	35	S34	4.53
	18000	25	40	S35	4.60
	18000	25	45	S36	4.70
	18000	30	25	S42	4.53
	18000	30	30	S43	4.71
	18000	30	35	S44	4.80
	18000	35	25	S52	4.82
	22000	22	45	S26	5.11
	22000	22	50	S27	5.21
	22000	25	40	S35	5.09
	22000	25	45	S36	5.20
	22000	25	50	S37	5.40
	22000	30	30	S43	5.21
	22000	30	35	S44	5.31
	22000	30	40	S45	5.50

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
25	22000	35	25	S52	5.33
	22000	35	30	S53	5.50
	27000	25	45	S36	5.76
	27000	25	50	S37	5.98
	27000	30	35	S44	5.88
	27000	30	40	S45	6.09
	27000	30	45	S46	6.20
	27000	35	30	S53	6.09
	27000	35	35	S54	6.30
	33000	25	50	S37	6.61
	33000	30	40	S45	6.74
	33000	30	45	S46	6.85
	33000	30	50	S47	7.00
	33000	35	30	S53	6.74
	33000	35	35	S54	6.96
	33000	35	40	S55	7.20
	39000	30	45	S46	7.45
	39000	30	50	S47	7.61
	39000	35	35	S54	7.57
	39000	35	40	S55	7.83
	39000	35	45	S56	8.00
	47000	30	50	S47	8.35
	47000	35	40	S55	8.59
	47000	35	45	S56	8.78
	56000	35	45	S56	9.59
	56000	35	50	S57	9.96
	68000	35	50	S57	11.00
35	2700	22	20	S21	1.60
	3300	22	20	S21	1.77
	3900	22	20	S21	1.92
	3900	22	25	S22	2.10
	3900	25	20	S31	2.00
	4700	22	25	S22	2.31
	4700	22	30	S23	2.40
	4700	25	20	S31	2.20
	5600	22	25	S22	2.52
	5600	22	30	S23	2.62
	5600	25	20	S31	2.40
	5600	25	25	S32	2.60
	5600	30	20	S41	2.60
	6800	22	30	S23	2.89
	6800	22	35	S24	2.90
	6800	25	25	S32	2.87
	6800	25	30	S33	2.90
	6800	30	20	S41	2.87
	6800	35	20	S51	3.10
	8200	22	35	S24	3.18
	8200	22	40	S25	3.30
	8200	25	25	S32	3.15
	8200	25	30	S33	3.18
	8200	25	35	S34	3.30
	8200	30	20	S41	3.15
	8200	30	25	S42	3.30
	8200	35	20	S51	3.40

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
35	10000	22	35	S24	3.52
	10000	22	40	S25	3.64
	10000	22	50	S27	3.90
	10000	25	30	S33	3.52
	10000	25	35	S34	3.64
	10000	25	40	S35	3.80
	10000	30	25	S42	3.64
	10000	30	30	S43	3.80
	10000	35	20	S51	3.76
	10000	35	25	S52	4.00
	12000	22	40	S25	3.99
	12000	22	45	S26	4.09
	12000	25	35	S34	3.99
	12000	25	40	S35	4.16
	12000	25	45	S36	4.30
	12000	30	25	S42	3.99
	12000	30	30	S43	4.16
	12000	30	35	S44	4.30
	12000	35	25	S52	4.38
	15000	22	45	S26	4.58
	15000	22	50	S27	4.78
	15000	25	40	S35	4.65
	15000	25	45	S36	4.81
	15000	25	50	S37	4.90
	15000	30	30	S43	4.65
	15000	30	35	S44	4.81
	15000	30	40	S45	5.00
	15000	35	25	S52	4.90
	15000	35	30	S53	5.00
	18000	25	45	S36	5.27
	18000	25	50	S37	5.37
	18000	30	35	S44	5.27
	18000	30	40	S45	5.48
	18000	30	45	S46	5.60
	18000	35	30	S53	5.48
	18000	35	35	S54	5.70
	22000	25	50	S37	5.93
	22000	30	40	S45	6.06
	22000	30	45	S46	6.19
	22000	30	50	S47	6.30
	22000	35	30	S53	6.06
	22000	35	35	S54	6.30
	22000	35	40	S55	6.40
	27000	30	45	S46	6.86
	27000	30	50	S47	6.98
	27000	35	35	S54	6.98
	27000	35	40	S55	7.09
	27000	35	50	S57	7.40
	33000	30	50	S47	7.72
	33000	35	40	S55	7.84
	33000	35	45	S56	7.87
	39000	35	45	S56	8.56
	39000	35	50	S57	8.89

(Note) Rated ripple current : 85℃ , 120Hz ; ESR. : 20℃ , 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
50	1800	22	20	S21	1.60
	2200	22	20	S21	1.77
	2700	22	20	S21	1.96
	2700	22	25	S22	2.10
	2700	25	20	S31	2.10
	3300	22	25	S22	2.32
	3300	25	20	S31	2.32
	3900	22	25	S22	2.52
	3900	22	30	S23	2.60
	3900	25	20	S31	2.52
	3900	25	25	S32	2.60
	3900	30	20	S41	2.70
	4700	22	30	S23	2.85
	4700	22	35	S24	3.10
	4700	25	25	S32	2.85
	4700	25	30	S33	3.00
	4700	30	20	S41	2.96
	4700	35	20	S51	3.20
	5600	22	30	S23	3.12
	5600	22	35	S24	3.38
	5600	22	40	S25	3.40
	5600	25	25	S32	3.12
	5600	25	30	S33	3.27
	5600	25	35	S34	3.40
	5600	30	20	S41	3.24
	5600	30	25	S42	3.40
	5600	35	20	S51	3.49
	6800	22	35	S24	3.73
	6800	22	40	S25	3.75
	6800	22	50	S27	3.90
	6800	25	30	S33	3.61
	6800	25	35	S34	3.75
	6800	25	40	S35	3.80
	6800	30	25	S42	3.75
	6800	30	30	S43	3.90
	6800	35	20	S51	3.85
	6800	35	25	S52	4.00
	8200	22	40	S25	4.11
	8200	22	45	S26	4.21
	8200	25	35	S34	4.11
	8200	25	40	S35	4.17
	8200	25	45	S36	4.30
	8200	30	25	S42	4.11
	8200	30	30	S43	4.28
	8200	30	35	S44	4.40
	8200	35	25	S52	4.39
	10000	22	45	S26	4.64
	10000	22	50	S27	4.73
	10000	25	40	S35	4.61
	10000	25	45	S36	4.75
	10000	25	50	S37	4.90

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
50	10000	30	30	S43	4.73
	10000	30	35	S44	4.86
	10000	30	40	S45	5.00
	10000	35	25	S52	4.85
	10000	35	30	S53	5.00
	12000	25	45	S36	5.20
	12000	25	50	S37	5.37
	12000	30	35	S44	5.32
	12000	30	40	S45	5.48
	12000	30	45	S46	5.60
	12000	35	30	S53	5.48
	12000	35	35	S54	5.70
	15000	25	50	S37	6.00
	15000	30	40	S45	6.12
	15000	30	45	S46	6.26
	15000	30	50	S47	6.40
	15000	35	30	S53	6.12
	15000	35	35	S54	6.37
	15000	35	40	S55	6.50
	18000	30	45	S46	6.86
	18000	30	50	S47	7.01
	18000	35	35	S54	6.98
	18000	35	40	S55	7.12
	18000	35	45	S56	7.30
	22000	30	50	S47	7.75
	22000	35	40	S55	7.87
	22000	35	45	S56	8.07
	27000	35	45	S56	8.94
	27000	35	50	S57	9.29
63	1500	22	20	S21	1.70
	1800	22	20	S21	1.86
	1800	25	20	S31	2.00
	2200	22	20	S21	2.06
	2200	22	25	S22	2.20
	2200	25	20	S31	2.21
	2700	22	25	S22	2.25
	2700	22	30	S23	2.50
	2700	25	20	S31	2.25
	2700	25	25	S32	2.30
	2700	30	20	S41	2.60
	3300	22	30	S23	2.76
	3300	22	35	S24	2.90
	3300	25	25	S32	2.54
	3300	30	20	S41	2.87
	3900	22	30	S23	3.00
	3900	22	35	S24	3.15
	3900	22	40	S25	3.30
	3900	25	25	S32	2.76
	3900	25	30	S33	3.20
	3900	30	20	S41	3.12
	3900	30	25	S42	3.30

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
63	3900	35	20	S51	3.40
	4700	22	35	S24	3.46
	4700	22	40	S25	3.62
	4700	22	45	S26	3.70
	4700	25	30	S33	3.51
	4700	25	35	S34	3.60
	4700	30	25	S42	3.62
	4700	35	20	S51	3.73
	5600	22	40	S25	3.95
	5600	22	45	S26	4.04
	5600	22	50	S27	4.10
	5600	25	35	S34	3.93
	5600	25	40	S35	4.00
	5600	30	25	S42	3.95
	5600	30	30	S43	4.10
	5600	35	20	S51	4.07
	5600	35	25	S52	4.20
	6800	22	45	S26	4.45
	6800	22	50	S27	4.52
	6800	25	35	S34	4.33
	6800	25	40	S35	4.41
	6800	25	45	S36	4.60
	6800	30	30	S43	4.52
	6800	30	35	S44	4.60
	6800	35	25	S52	4.63
	6800	35	30	S53	4.80
	8200	22	50	S27	4.96
	8200	25	45	S36	5.05
	8200	30	35	S44	5.05
	8200	30	40	S45	5.20
	8200	35	25	S52	5.08
	8200	35	30	S53	5.27
	8200	35	35	S54	5.50
	10000	25	50	S37	5.82
	10000	30	35	S44	5.58
	10000	30	40	S45	5.74
	10000	30	45	S46	5.90
	10000	35	30	S53	5.82
	10000	35	35	S54	6.07
	10000	35	40	S55	6.20
	12000	30	45	S46	6.46
	12000	35	35	S54	6.65
	12000	35	40	S55	6.79
	12000	35	45	S56	6.90
	15000	30	50	S47	7.52
	15000	35	40	S55	7.59
	15000	35	45	S56	7.71
	15000	35	50	S57	7.90
	18000	35	45	S56	8.45
	18000	35	50	S57	8.65
	22000	35	50	S57	9.57

(Note) Rated ripple current : 85℃ , 120Hz ; ESR. : 20℃ , 120Hz

• The standard ratings follow the next page.

LA5, LT5 LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS ELNA®

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
80	1000	22	20	S21	1.50
	1200	22	20	S21	1.64
	1200	25	20	S31	1.70
	1500	22	25	S22	1.90
	1500	25	20	S31	1.90
	1800	22	25	S22	2.08
	1800	22	30	S23	2.20
	1800	25	20	S31	2.08
	1800	25	25	S32	2.20
	1800	30	20	S41	2.20
	2200	22	30	S23	2.43
	2200	22	35	S24	2.50
	2200	25	25	S32	2.43
	2200	25	30	S33	2.50
	2200	30	20	S41	2.43
	2700	22	30	S23	2.69
	2700	22	35	S24	2.77
	2700	22	40	S25	2.80
	2700	25	25	S32	2.69
	2700	25	30	S33	2.77
	2700	30	20	S41	2.69
	2700	30	25	S42	2.90
	2700	35	20	S51	3.00
	3300	22	35	S24	3.06
	3300	22	40	S25	3.10
	3300	22	45	S26	3.20
	3300	25	30	S33	3.06
	3300	25	35	S34	3.10
	3300	30	25	S42	3.21
	3300	35	20	S51	3.32
	3900	22	40	S25	3.37
	3900	22	45	S26	3.48
	3900	22	50	S27	3.60
	3900	25	35	S34	3.37
	3900	25	40	S35	3.50
	3900	30	25	S42	3.49
	3900	30	30	S43	3.60
	3900	35	25	S52	3.70
	4700	22	45	S26	3.82
	4700	22	50	S27	3.95
	4700	25	40	S35	3.84
	4700	25	45	S36	3.92
	4700	25	50	S37	4.00
	4700	30	30	S43	3.95
	4700	30	35	S44	4.00
	4700	35	25	S52	4.06
	4700	35	30	S53	4.20
	5600	25	45	S36	4.15

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
80	5600	25	50	S37	4.37
	5600	30	35	S44	4.37
	5600	30	40	S45	4.50
	5600	35	30	S53	4.58
	5600	35	35	S54	4.70
	6800	25	50	S37	4.81
	6800	30	40	S45	4.96
	6800	30	45	S46	5.10
	6800	35	30	S53	5.05
	6800	35	35	S54	5.18
	6800	35	40	S55	5.30
	8200	30	45	S46	5.60
	8200	30	50	S47	5.83
	8200	35	35	S54	5.69
	8200	35	40	S55	5.82
	8200	35	45	S56	6.00
	10000	30	50	S47	6.44
	10000	35	40	S55	6.43
	10000	35	45	S56	6.63
	10000	35	50	S57	6.80
	12000	35	45	S56	7.26
	12000	35	50	S57	7.45
100	560	22	20	S21	1.30
	680	22	20	S21	1.43
	820	22	20	S21	1.57
	820	22	25	S22	1.70
	820	25	20	S31	1.70
	1000	22	25	S22	1.88
	1000	25	20	S31	1.88
	1200	22	25	S22	2.06
	1200	22	30	S23	2.10
	1200	25	20	S31	2.06
	1200	25	25	S32	2.10
	1200	30	20	S41	2.20
	1500	22	30	S23	2.35
	1500	22	35	S24	2.50
	1500	25	25	S32	2.35
	1500	25	30	S33	2.50
	1500	30	20	S41	2.46
	1500	35	20	S51	2.70
	1800	22	35	S24	2.74
	1800	22	40	S25	2.80
	1800	25	30	S33	2.74
	1800	25	35	S34	2.80
	1800	30	20	S41	2.69
	1800	30	25	S42	2.80
	1800	35	20	S51	2.96
	2200	22	40	S25	3.10

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
100	2200	22	45	S26	3.20
	2200	25	30	S33	3.03
	2200	25	35	S34	3.10
	2200	25	40	S35	3.20
	2200	30	25	S42	3.10
	2200	30	30	S43	3.20
	2200	35	20	S51	3.27
	2200	35	25	S52	3.40
	2700	22	45	S26	3.55
	2700	22	50	S27	3.70
	2700	25	35	S34	3.43
	2700	25	40	S35	3.55
	2700	25	45	S36	2.90
	2700	30	30	S43	3.55
	2700	30	35	S44	3.70
	2700	35	25	S52	3.77
	3300	22	50	S27	4.09
	3300	25	40	S35	3.92
	3300	25	45	S36	3.98
	3300	25	50	S37	4.10
	3300	30	30	S43	3.92
	3300	30	35	S44	4.09
	3300	30	40	S45	4.20
	3300	35	25	S52	4.16
	3300	35	30	S53	4.30
	3900	25	45	S36	4.33
	3900	25	50	S37	4.46
	3900	30	35	S44	4.45
	3900	30	40	S45	4.57
	3900	30	45	S46	4.70
	3900	35	30	S53	4.67
	3900	35	35	S54	4.80
	4700	30	40	S45	5.01
	4700	30	45	S46	5.16
	4700	30	50	S47	5.20
	4700	35	30	S53	5.13
	4700	35	35	S54	5.27
	4700	35	40	S55	5.40
	5600	30	45	S46	5.63
	5600	30	50	S47	5.68
	5600	35	35	S54	5.75
	5600	35	40	S55	5.89
	5600	35	45	S56	6.00
	6800	30	50	S47	6.25
	6800	35	40	S55	6.50
	6800	35	45	S56	6.61
	8200	35	45	S56	7.26
	8200	35	50	S57	7.55

(Note) Rated ripple current : 85℃ , 120Hz ; ESR. : 20℃ , 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
160	270	22	20	S21	1.49
	330	22	20	S21	1.65
	390	22	20	S21	1.71
	390	22	25	S22	1.93
	390	25	20	S31	1.76
	470	22	25	S22	2.12
	470	25	20	S31	1.93
	560	22	25	S22	2.31
	560	22	30	S23	2.43
	560	25	25	S32	2.43
	560	30	20	S41	2.11
	680	22	30	S23	2.68
	680	22	35	S24	2.70
	680	25	25	S32	2.68
	680	25	30	S33	2.70
	680	30	20	S41	2.33
	680	35	20	S51	2.42
	820	22	35	S24	2.96
	820	22	40	S25	2.50
	820	25	30	S33	2.96
	820	25	35	S34	2.50
	820	30	20	S41	2.56
	820	30	25	S42	3.13
	820	35	20	S51	2.66
	1000	22	40	S25	3.43
	1000	22	50	S27	2.90
	1000	25	30	S33	3.27
	1000	25	35	S34	3.47
	1000	25	40	S35	2.80
	1000	30	25	S42	3.30
	1000	30	30	S43	3.54
	1000	35	20	S51	2.94
	1000	35	25	S52	3.46
	1200	22	45	S26	3.96
	1200	25	35	S34	3.80
	1200	25	45	S36	4.13
	1200	30	30	S43	3.87
	1200	30	35	S44	3.30
	1200	35	25	S52	3.79
	1500	22	50	S27	4.60
	1500	25	40	S35	4.41
	1500	25	50	S37	4.80
	1500	30	30	S43	4.33

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
160	1500	30	35	S44	4.52
	1500	30	40	S45	3.70
	1500	35	25	S52	4.24
	1500	35	30	S53	4.56
	1800	25	50	S37	5.26
	1800	30	35	S44	4.95
	1800	30	40	S45	5.14
	1800	30	45	S46	4.20
	1800	35	30	S53	4.99
	1800	35	35	S54	5.21
	2200	30	40	S45	5.68
	2200	30	45	S46	5.93
	2200	30	50	S47	4.70
	2200	35	35	S54	5.76
	2200	35	40	S55	4.70
	2700	30	50	S47	6.83
	2700	35	40	S55	6.61
	2700	35	50	S57	5.40
	3300	35	45	S56	7.60
	3900	35	50	S57	8.61
180	220	22	20	S21	1.34
	270	22	20	S21	1.49
	330	22	20	S21	1.56
	330	22	25	S22	1.77
	330	25	20	S31	1.62
	390	22	25	S22	1.92
	390	25	20	S31	1.76
	470	22	25	S22	2.11
	470	22	30	S23	2.23
	470	25	25	S32	2.23
	470	30	20	S41	1.94
	560	22	30	S23	2.43
	560	22	35	S24	2.45
	560	25	25	S32	2.43
	560	25	30	S33	2.45
	560	30	20	S41	2.12
	560	35	20	S51	2.10
	680	22	35	S24	2.70
	680	22	40	S25	2.30
	680	25	30	S33	2.70
	680	25	35	S34	2.30
	680	30	20	S41	2.33
	680	30	25	S42	2.86

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
180	680	35	20	S51	2.42
	820	22	35	S24	2.96
	820	22	40	S25	3.11
	820	22	45	S26	2.60
	820	25	30	S33	2.96
	820	25	35	S34	3.14
	820	25	40	S35	2.60
	820	30	25	S42	3.00
	820	30	30	S43	3.20
	820	35	20	S51	2.66
	820	35	25	S52	3.13
	1000	22	45	S26	3.61
	1000	25	35	S34	3.47
	1000	25	40	S35	3.60
	1000	25	45	S36	2.90
	1000	30	25	S42	3.23
	1000	30	30	S43	3.53
	1000	35	25	S52	3.46
	1200	22	50	S27	4.11
	1200	25	40	S35	3.94
	1200	25	45	S36	4.13
	1200	25	50	S37	3.30
	1200	30	30	S43	3.87
	1200	30	35	S44	4.04
	1200	35	25	S52	3.79
	1200	35	30	S53	4.07
	1500	25	50	S37	4.80
	1500	30	35	S44	4.52
	1500	30	45	S46	4.90
	1500	35	30	S53	4.56
	1500	35	35	S54	4.76
	1800	30	40	S45	5.14
	1800	30	45	S46	5.36
	1800	30	50	S47	4.30
	1800	35	35	S54	5.21
	1800	35	40	S55	4.30
	2200	30	45	S46	5.93
	2200	30	50	S47	6.17
	2200	35	35	S54	5.76
	2200	35	40	S55	5.97
	2200	35	45	S56	4.80
	3300	35	50	S57	7.92

(Note) Rated ripple current : 85℃ , 120Hz ; ESR. : 20℃ , 120Hz

• The standard ratings follow the next page.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications
from ELNA to ensure that the component is suitable for your use.

LA5, LT5 LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS ELNA®

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
200	180	22	20	S21	1.00
	220	22	20	S21	1.34
	270	22	20	S21	1.41
	270	22	25	S22	1.30
	270	25	20	S31	1.47
	330	22	25	S22	1.77
	330	25	20	S31	1.62
	390	22	25	S22	1.92
	390	22	30	S23	1.60
	390	25	20	S31	1.69
	390	25	25	S32	2.03
	390	30	20	S41	1.70
	470	22	25	S22	2.11
	470	22	30	S23	2.23
	470	22	35	S24	1.90
	470	25	25	S32	2.23
	470	30	20	S41	1.94
	560	22	30	S23	2.43
	560	22	35	S24	2.44
	560	22	40	S25	2.10
	560	25	25	S32	2.43
	560	25	30	S33	2.45
	560	30	20	S41	2.11
	560	30	25	S42	2.10
	560	35	20	S51	2.20
	680	22	35	S24	2.69
	680	22	45	S26	2.40
	680	25	30	S33	2.70
	680	25	35	S34	2.86
	680	30	25	S42	2.86
	680	35	20	S51	2.42
	820	22	40	S25	3.11
	820	22	50	S27	2.60
	820	25	35	S34	3.14
	820	25	40	S35	2.60
	820	30	25	S42	3.00
	820	30	30	S43	3.20
	820	35	20	S51	2.66
	820	35	25	S52	3.13
	1000	22	45	S26	3.61
	1000	25	40	S35	3.60
	1000	25	50	S37	3.00
	1000	30	30	S43	3.53
	1000	30	35	S44	3.00
	1000	35	25	S52	3.46
	1000	35	30	S53	3.00
	1200	22	50	S27	4.11
	1200	25	45	S36	4.13
	1200	30	35	S44	4.04
	1200	30	40	S45	3.40
	1200	35	25	S52	3.79
	1200	35	30	S53	4.08
	1200	35	35	S54	3.40
	1500	25	50	S37	4.80
	1500	30	40	S45	4.69
	1500	30	50	S47	4.00
200	1500	35	30	S53	4.56
	1500	35	35	S54	4.75
	1500	35	40	S55	3.90
	1800	30	45	S46	5.35
	1800	35	35	S54	5.20
	1800	35	45	S56	4.40
	2200	30	50	S47	6.16
	2200	35	40	S55	5.97
	2200	35	45	S56	6.20
	2200	35	50	S57	5.00
	2700	35	45	S56	6.87
250	150	22	20	S21	1.10
	180	22	20	S21	1.15
	180	25	20	S31	1.20
	220	22	20	S21	1.24
	220	22	25	S22	1.44
	220	25	20	S31	1.33
	270	22	25	S22	1.60
	270	22	30	S23	1.40
	270	25	20	S31	1.40
	270	25	25	S32	1.40
	270	30	20	S41	1.40
	330	22	25	S22	1.77
	330	22	30	S23	1.87
	330	22	35	S24	1.60
	330	25	25	S32	1.87
	330	30	20	S41	1.63
	390	22	30	S23	2.03
	390	22	35	S24	2.04
	390	22	40	S25	1.80
	390	25	25	S32	2.03
	390	25	30	S33	2.04
	390	30	20	S41	1.77
	390	30	25	S42	1.80
	390	35	20	S51	1.84
	470	22	35	S24	2.24
	470	22	45	S26	2.00
	470	25	30	S33	2.24
	470	25	35	S34	2.00
	470	30	25	S42	2.37
	470	35	20	S51	2.02
	560	22	40	S25	2.57
	560	22	50	S27	2.20
	560	25	30	S33	2.44
	560	25	35	S34	2.60
	560	25	40	S35	2.20
	560	30	25	S42	2.48
	560	30	30	S43	2.64
	560	35	20	S51	2.20
	560	35	25	S52	2.59
	680	22	45	S26	2.98
	680	25	35	S34	2.86
	680	25	40	S35	2.97
	680	25	45	S36	2.50
	680	30	30	S43	2.91
	680	30	35	S44	2.60
250	680	35	25	S52	2.85
	680	35	30	S53	2.60
	820	22	50	S27	3.40
	820	25	40	S35	3.26
	820	25	45	S36	3.42
	820	30	30	S43	3.20
	820	30	35	S44	3.34
	820	30	40	S45	2.90
	820	35	25	S52	3.13
	820	35	30	S53	3.36
	820	35	35	S54	2.90
	1000	25	50	S37	3.92
	1000	30	35	S44	3.69
	1000	30	40	S45	3.83
	1000	30	45	S46	3.30
	1000	35	30	S53	3.72
	1000	35	35	S54	3.88
	1000	35	40	S55	3.30
	1200	30	40	S45	4.20
	1200	30	45	S46	4.38
	1200	30	50	S47	3.70
	1200	35	35	S54	4.25
	1200	35	45	S56	3.70
	1500	30	50	S47	5.08
	1500	35	40	S55	4.93
	1500	35	50	S57	4.20
	1800	35	45	S56	5.62
	1800	35	50	S57	5.85
	2200	35	50	S57	6.47
315	100	22	20	S21	0.90
	120	22	20	S21	0.94
	120	25	20	S31	0.88
	150	22	20	S21	1.02
	150	22	25	S22	1.20
	150	25	20	S31	1.10
	180	22	25	S22	1.31
	180	22	30	S23	1.38
	180	25	20	S31	1.15
	180	25	25	S32	1.38
	180	30	20	S41	1.20
	220	22	25	S22	1.45
	220	22	30	S23	1.53
	220	22	35	S24	1.30
	220	25	20	S31	1.32
	220	25	25	S32	1.53
	220	30	20	S41	1.33
	270	22	30	S23	1.69
	270	22	35	S24	1.70
	270	22	40	S25	1.50
	270	25	25	S32	1.69
	270	25	30	S33	1.70
	270	30	20	S41	1.47
	270	30	25	S42	1.50
	270	35	20	S51	1.69
	330	22	35	S24	1.88
	330	22	40	S25	1.97

(Note) Rated ripple current : 85℃ , 120Hz ; ESR. : 20℃ , 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
315	330	22	45	S26	1.70
	330	25	30	S33	1.88
	330	25	35	S34	1.96
	330	30	20	S41	1.62
	330	30	25	S42	1.99
	330	35	20	S51	1.87
	390	22	35	S24	2.04
	390	22	40	S25	2.14
	390	25	30	S33	2.04
	390	25	35	S34	2.14
	390	25	40	S35	1.80
	390	30	25	S42	2.08
	390	30	30	S43	2.20
	390	35	25	S52	2.16
	470	22	40	S25	2.35
	470	22	45	S26	2.48
	470	25	35	S34	2.34
	470	25	40	S35	2.46
	470	25	50	S37	2.10
	470	30	25	S42	2.23
	470	30	30	S43	2.42
	470	30	35	S44	2.10
	470	35	25	S52	2.37
	470	35	30	S53	2.55
	560	22	45	S26	2.70
	560	22	50	S27	2.81
	560	25	40	S35	2.69
	560	25	50	S37	2.93
	560	30	30	S43	2.64
	560	30	35	S44	2.76
	560	30	40	S45	2.40
	560	35	25	S52	2.59
	560	35	30	S53	2.79
	560	35	35	S54	2.50
	680	25	45	S36	3.11
	680	25	50	S37	3.23
	680	30	35	S44	3.04
	680	30	40	S45	3.16
	680	30	45	S46	2.70
	680	35	30	S53	3.07
	680	35	35	S54	3.20
	680	35	40	S55	2.80
	820	25	50	S37	3.55
	820	30	40	S45	3.47
	820	30	45	S46	3.62
	820	35	35	S54	3.51
	820	35	40	S55	3.65
	820	35	45	S56	3.10
	1000	30	45	S46	4.00
	1000	30	50	S47	4.16
	1000	35	40	S55	4.03
	1000	35	45	S56	4.20
	1000	35	50	S57	3.50
	1200	30	50	S47	4.56
	1200	35	45	S56	4.60
	1200	35	50	S57	4.78

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
315	1500	35	50	S57	5.34
350	68	22	20	S21	0.61
	82	22	20	S21	0.81
	100	22	20	S21	0.85
	100	22	25	S22	0.78
	100	25	20	S31	0.77
	120	22	20	S21	0.91
	120	22	25	S22	1.07
	120	25	20	S31	0.97
	150	22	25	S22	1.20
	150	22	30	S23	1.26
	150	25	20	S31	1.09
	150	25	25	S32	0.99
	150	30	20	S41	1.00
	180	22	25	S22	1.31
	180	22	30	S23	1.37
	180	22	35	S24	1.10
	180	25	20	S31	1.15
	180	25	25	S32	1.38
	180	25	30	S33	1.10
	180	30	20	S41	1.20
	180	35	20	S51	1.20
	220	22	30	S23	1.52
	220	22	35	S24	1.53
	220	22	40	S25	1.30
	220	25	25	S32	1.53
	220	25	30	S33	1.54
	220	25	35	S34	1.30
	220	30	20	S41	1.33
	220	30	25	S42	1.30
	220	35	20	S51	1.38
	270	22	35	S24	1.70
	270	22	40	S25	1.78
	270	22	50	S27	1.50
	270	25	25	S32	1.69
	270	25	30	S33	1.70
	270	25	40	S35	1.50
	270	30	20	S41	1.47
	270	30	25	S42	1.71
	270	30	30	S43	1.50
	270	35	20	S51	1.53
	270	35	25	S52	1.60
	330	22	40	S25	1.97
	330	22	50	S27	2.15
	330	25	30	S33	1.88
	330	25	35	S34	2.00
	330	25	45	S36	1.70
	330	30	25	S42	1.85
	330	30	30	S43	2.03
	330	30	35	S44	1.70
	330	35	20	S51	1.69
	330	35	25	S52	1.99
	390	22	45	S26	2.26
	390	22	50	S27	2.34
	390	25	35	S34	2.17
	390	25	40	S35	2.25

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
350	390	25	50	S37	1.90
	390	30	30	S43	2.20
	390	30	40	S45	1.90
	390	35	25	S52	2.16
	390	35	30	S53	1.90
	470	22	50	S27	2.57
	470	25	40	S35	2.47
	470	25	45	S36	2.58
	470	30	30	S43	2.42
	470	30	35	S44	2.53
	470	30	45	S46	2.10
	470	35	25	S52	2.37
	470	35	30	S53	2.55
	470	35	35	S54	2.20
	560	25	45	S36	2.82
	560	25	50	S37	2.93
	560	30	35	S44	2.76
	560	30	40	S45	2.87
	560	30	50	S47	2.40
	560	35	30	S53	2.79
	560	35	35	S54	2.90
	560	35	40	S55	2.50
	680	30	40	S45	3.16
	680	30	45	S46	3.30
	680	35	30	S53	3.07
	680	35	35	S54	3.20
	680	35	45	S56	2.80
	820	30	45	S46	3.62
	820	30	50	S47	3.76
	820	35	35	S54	3.51
	820	35	40	S55	3.65
	1000	35	40	S55	4.03
	1000	35	45	S56	4.18
	1200	35	50	S57	4.78
400	56	22	20	S21	0.54
	82	22	20	S21	0.82
	82	22	25	S22	0.69
	82	25	20	S31	0.69
	100	22	20	S21	0.91
	100	22	25	S22	1.07
	100	25	20	S31	0.99
	120	22	25	S22	1.17
	120	22	30	S23	0.86
	120	25	20	S31	1.03
	120	25	25	S32	0.87
	120	30	20	S41	0.93
	150	22	25	S22	1.31
	150	22	30	S23	1.35
	150	22	35	S24	1.00
	150	25	20	S31	1.20
	150	25	25	S32	1.35
	150	25	30	S33	1.00
	150	30	20	S41	1.21
	150	35	20	S51	1.20
	180	22	30	S23	1.52
	180	22	35	S24	1.53

(Note) Rated ripple current : 85℃ , 120Hz ; ESR. : 20℃ , 120Hz

• The standard ratings follow the next page.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications
from ELNA to ensure that the component is suitable for your use.

LA5, LT5 LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS ELNA®

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
400	180	22	40	S25	1.10
	180	25	25	S32	1.52
	180	25	30	S33	1.53
	180	25	35	S34	1.10
	180	30	20	S41	1.32
	180	30	25	S42	1.20
	180	35	20	S51	1.37
	220	22	30	S23	1.68
	220	22	35	S24	1.69
	220	22	45	S26	1.30
	220	25	25	S32	1.68
	220	25	30	S33	1.69
	220	25	40	S35	1.30
	220	30	20	S41	1.46
	220	30	25	S42	1.70
	220	30	30	S43	1.40
	220	35	20	S51	1.52
	220	35	25	S52	1.50
	270	22	35	S24	1.87
	270	22	40	S25	1.96
	270	22	45	S26	2.06
	270	25	30	S33	1.87
	270	25	35	S34	1.98
	270	25	45	S36	1.50
	270	30	25	S42	1.84
	270	30	30	S43	2.02
	270	30	35	S44	1.60
	270	35	20	S51	1.68
	270	35	25	S52	1.98
	330	22	40	S25	2.17
	330	22	45	S26	2.28
	330	25	35	S34	2.19
	330	25	40	S35	2.27
	330	25	50	S37	1.70
	330	30	25	S42	2.01
	330	30	30	S43	2.24
	330	30	40	S45	1.80
	330	35	25	S52	2.19
	330	35	30	S53	1.80
	390	22	50	S27	2.58
	390	25	40	S35	2.47
	390	25	45	S36	2.59
	390	30	30	S43	2.43
	390	30	35	S44	2.53
	390	30	45	S46	2.00
	390	35	25	S52	2.38
	390	35	30	S53	2.55
	390	35	35	S54	2.10
	470	25	45	S36	2.84
	470	25	50	S37	2.96
	470	30	35	S44	2.78
	470	30	40	S45	2.89
	470	30	50	S47	2.20

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
400	470	35	30	S53	2.80
	470	35	35	S54	2.93
	470	35	40	S55	2.30
	560	30	40	S45	3.15
	560	30	45	S46	3.29
	560	35	30	S53	3.06
	560	35	35	S54	3.19
	560	35	45	S56	2.60
	680	30	45	S46	3.63
	680	30	50	S47	3.77
	680	35	35	S54	3.52
	680	35	40	S55	3.65
	680	35	50	S57	2.90
	820	35	40	S55	4.01
	820	35	45	S56	4.17
	1000	35	45	S56	4.60
	1000	35	50	S57	4.80
450	47	22	20	S21	0.49
	56	25	20	S31	0.57
	68	22	20	S21	0.82
	68	22	25	S22	0.62
	82	22	20	S21	0.85
	82	22	25	S22	0.97
	82	22	30	S23	0.71
	82	25	20	S31	0.87
	82	25	25	S32	0.72
	82	30	20	S41	0.77
	100	22	25	S22	1.07
	100	22	35	S24	0.82
	100	25	20	S31	0.92
	100	30	20	S41	0.98
	120	22	25	S22	1.17
	120	22	30	S23	1.23
	120	22	40	S25	0.92
	120	25	20	S31	0.99
	120	25	25	S32	1.24
	120	25	30	S33	0.91
	120	30	20	S41	1.07
	120	30	25	S42	0.97
	120	35	20	S51	1.00
	150	22	30	S23	1.38
	150	22	35	S24	1.42
	150	22	45	S26	1.10
	150	25	25	S32	1.39
	150	25	30	S33	1.40
	150	25	35	S34	1.00
	150	30	20	S41	1.20
	150	30	25	S42	1.48
	150	35	20	S51	1.26
	180	22	35	S24	1.56
	180	22	50	S27	1.20
	180	25	25	S32	1.52
	180	25	30	S33	1.53

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
450	180	25	40	S35	1.20
	180	30	25	S42	1.58
	180	30	30	S43	1.20
	180	35	20	S51	1.37
	180	35	25	S52	1.30
	220	22	40	S25	1.77
	220	25	30	S33	1.69
	220	25	35	S34	1.79
	220	25	50	S37	1.40
	220	30	25	S42	1.68
	220	30	30	S43	1.82
	220	30	35	S44	1.40
	220	35	20	S51	1.52
	220	35	25	S52	1.79
	220	35	30	S53	1.50
	270	22	45	S26	2.07
	270	25	35	S34	1.98
	270	25	40	S35	2.05
	270	30	30	S43	2.02
	270	30	35	S44	2.11
	270	30	40	S45	1.60
	270	35	25	S52	1.98
	270	35	30	S53	2.13
	270	35	35	S54	1.70
	330	22	50	S27	2.37
	330	25	40	S35	2.27
	330	25	45	S36	2.38
	330	30	30	S43	2.23
	330	30	35	S44	2.34
	330	30	50	S47	1.80
	330	35	25	S52	2.19
	330	35	30	S53	2.35
	330	35	40	S55	1.90
	390	25	45	S36	2.59
	390	25	50	S37	2.69
	390	30	35	S44	2.54
	390	30	40	S45	2.63
	390	35	30	S53	2.56
	390	35	35	S54	2.66
	390	35	45	S56	2.20
	470	30	40	S45	2.89
	470	30	45	S46	3.01
	470	35	35	S54	2.92
	470	35	40	S55	3.03
	470	35	50	S57	2.40
	560	30	45	S46	3.29
	560	30	50	S47	3.42
	560	35	35	S54	3.19
	560	35	40	S55	3.31
	680	35	45	S56	3.80
	680	35	50	S57	3.95
	820	35	50	S57	4.34

(Note) Rated ripple current : 85℃ , 120Hz ; ESR. : 20℃ , 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

LAH, LTH LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS ELNA®

Miniaturized,High-Reliability,High-Ripple Capacitors

GREEN CAP | 105°C 2000hours

- High-reliability, high-ripple capacitors.
- Guarantees 2000 hours at 105℃.

Miniaturized

LAH ⇦ LAG

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (°C)	−40 to +105 (−25 to +105 at 160V or more)
Tolerance at rated capacitance (%)	± 20 (20℃,120Hz)
Leakage current (μA) (max.)	$3\sqrt{CV}$ (after 5 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 16, 25, 35, 50, 63 to 100, 160 to 250, 400 to 450 tanδ (max.): 0.50, 0.40, 0.35, 0.30, 0.20, 0.15, 0.20 (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 16 to 100, 160 to 200, 250 to 400 Impedance ratio (max.) Z−25℃/Z+20℃: 4, 4, 4 Impedance ratio (max.) Z−40℃/Z+20℃: 15, —, — (120Hz)
Endurance (105℃) (Applied ripple current)	Test time: 2000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 200% or less of the initial specified value
Shelf life (105℃)	Test time: 1000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±15% of initial value Tangent of the loss angle: 150% or less of the initial specified value Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit: mm

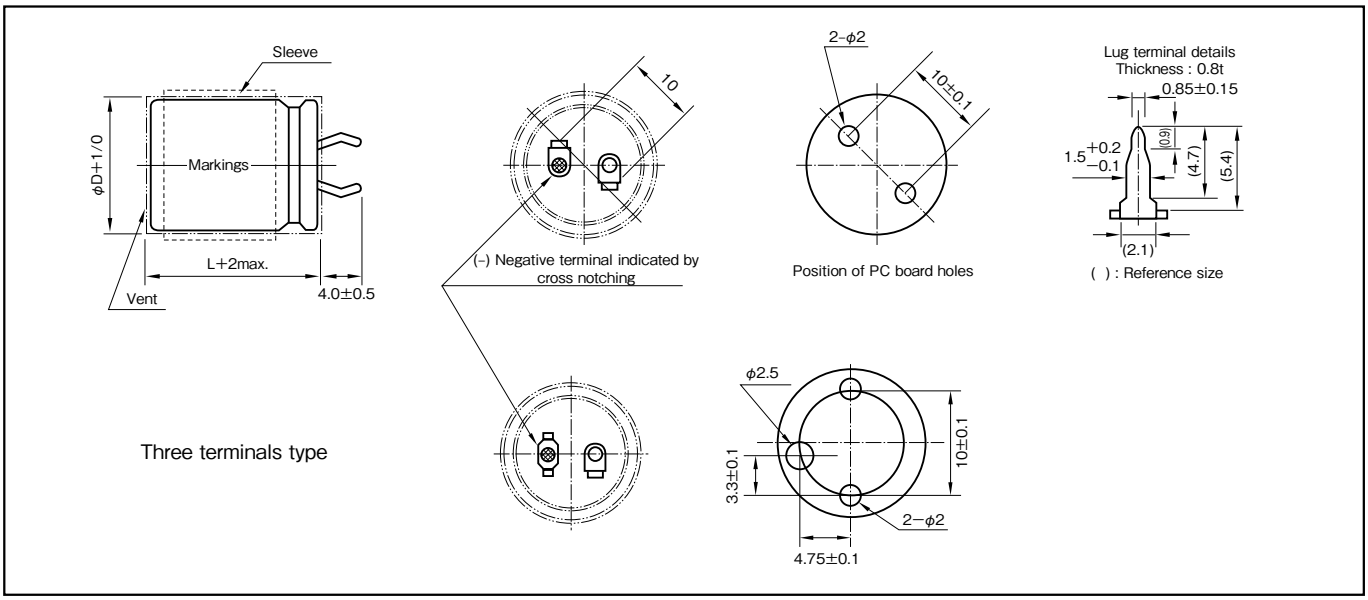

Part numbering system

series LAH, standard terminal type :400V330μF

LAH	—	400	V	331	M	S54	#	B
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol

series LTH, three terminals type :400V330μF

LTH	—	400	V	331	M	S54	#	B
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50	120	1k	10k	30k
100 or less	0.95	1	1.10	1.15	1.15
160 to 250	0.81	1	1.32	1.45	1.50
400 or more	0.77	1	1.30	1.41	1.43

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
16	4700	22	20	S21	1.23
	5600	22	20	S21	1.35
	6800	22	20	S21	1.48
	6800	22	25	S22	1.60
	6800	25	20	S31	1.53
	8200	22	25	S22	1.76
	8200	25	20	S31	1.68
	8200	30	20	S41	1.84
	10000	22	25	S22	1.94
	10000	22	30	S23	1.99
	10000	25	20	S31	1.85
	10000	25	25	S32	1.99
	10000	30	20	S41	2.03
	12000	22	30	S23	2.18
	12000	22	35	S24	2.28
	12000	25	25	S32	2.18
	12000	25	30	S33	2.30
	12000	30	20	S41	2.23
	12000	30	25	S42	2.38
	12000	35	20	S51	2.38
	15000	22	30	S23	2.44
	15000	22	35	S24	2.55
	15000	22	40	S25	2.64
	15000	25	25	S32	2.44
	15000	25	30	S33	2.57
	15000	25	35	S34	2.68
	15000	30	25	S42	2.66
	15000	35	20	S51	2.66
	18000	22	35	S24	2.79
	18000	22	40	S25	2.89
	18000	22	45	S26	2.98
	18000	25	30	S33	2.82
	18000	25	35	S34	2.94
	18000	25	40	S35	3.04
	18000	30	25	S42	2.91
	18000	30	30	S43	3.00
	18000	35	20	S51	2.91
	18000	35	25	S52	3.10
	22000	22	40	S25	3.20
	22000	22	45	S26	3.29
	22000	25	35	S34	3.25
	22000	25	40	S35	3.36
	22000	25	45	S36	3.40
	22000	30	30	S43	3.32
	22000	30	35	S44	3.39
	22000	35	25	S52	3.43
	27000	22	45	S26	3.65
	27000	22	50	S27	3.70
	27000	25	40	S35	3.72
	27000	25	45	S36	3.77
	27000	25	50	S37	3.81
	27000	30	30	S43	3.67
	27000	30	35	S44	3.76
	27000	30	40	S45	3.83

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
16	27000	35	25	S52	3.80
	27000	35	30	S53	3.82
	33000	22	50	S27	4.00
	33000	25	45	S36	4.16
	33000	25	50	S37	4.21
	33000	30	35	S44	4.15
	33000	30	40	S45	4.23
	33000	30	45	S46	4.30
	33000	35	30	S53	4.22
	33000	35	35	S54	4.24
	39000	25	50	S37	4.58
	39000	30	40	S45	4.60
	39000	30	45	S46	4.67
	39000	30	50	S47	4.74
	39000	35	30	S53	4.59
	39000	35	35	S54	4.61
	39000	35	40	S55	4.72
	47000	30	45	S46	5.13
	47000	30	50	S47	5.20
	47000	35	35	S54	5.06
	47000	35	40	S55	5.18
	47000	35	45	S56	5.27
	56000	30	50	S47	5.68
	56000	35	40	S55	5.66
	56000	35	45	S56	5.75
	68000	35	45	S56	6.34
	68000	35	50	S57	6.59
	82000	35	50	S57	7.23
25	3300	22	20	S21	1.21
	3900	22	20	S21	1.31
	4700	22	20	S21	1.44
	4700	22	25	S22	1.55
	4700	25	20	S31	1.48
	5600	22	25	S22	1.69
	5600	25	20	S31	1.61
	5600	30	20	S41	1.74
	6800	22	25	S22	1.86
	6800	22	30	S23	1.91
	6800	25	20	S31	1.78
	6800	25	25	S32	1.91
	6800	30	20	S41	1.92
	8200	22	30	S23	2.10
	8200	22	35	S24	2.14
	8200	25	25	S32	2.10
	8200	25	30	S33	2.16
	8200	30	20	S41	2.10
	8200	30	25	S42	2.25
	8200	35	20	S51	2.17
	10000	22	30	S23	2.32
	10000	22	35	S24	2.36
	10000	22	40	S25	2.40
	10000	25	25	S32	2.32
	10000	25	30	S33	2.39
	10000	25	35	S34	2.44

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
25	10000	30	25	S42	2.48
	10000	35	20	S51	2.40
	12000	22	35	S24	2.59
	12000	22	40	S25	2.63
	12000	22	45	S26	2.69
	12000	25	30	S33	2.61
	12000	25	35	S34	2.67
	12000	25	40	S35	2.74
	12000	30	25	S42	2.59
	12000	30	30	S43	2.70
	12000	35	20	S51	2.63
	12000	35	25	S52	2.80
	15000	22	40	S25	2.94
	15000	22	45	S26	3.01
	15000	25	35	S34	2.99
	15000	25	40	S35	3.06
	15000	25	45	S36	3.15
	15000	30	30	S43	3.02
	15000	30	35	S44	3.13
	15000	35	25	S52	3.13
	15000	35	30	S53	3.22
	18000	22	45	S26	3.29
	18000	22	50	S27	3.44
	18000	25	40	S35	3.36
	18000	25	45	S36	3.45
	18000	25	50	S37	3.54
	18000	30	30	S43	3.31
	18000	30	35	S44	3.43
	18000	30	40	S45	3.54
	18000	35	25	S52	3.43
	18000	35	30	S53	3.53
	22000	22	50	S27	3.80
	22000	25	45	S36	3.81
	22000	25	50	S37	3.91
	22000	30	35	S44	3.79
	22000	30	40	S45	3.91
	22000	30	45	S46	4.24
	22000	35	30	S53	3.90
	22000	35	35	S54	3.96
	27000	25	50	S37	4.34
	27000	30	40	S45	4.34
	27000	30	45	S46	4.70
	27000	35	35	S54	4.39
	27000	35	40	S55	4.56
	27000	35	45	S56	4.75
	33000	30	45	S46	5.19
	33000	30	50	S47	5.30
	33000	35	35	S54	4.85
	33000	35	40	S55	5.04
	33000	35	50	S57	5.39
	39000	30	50	S47	5.58
	39000	35	40	S55	5.48
	39000	35	45	S56	5.71
	47000	35	50	S57	6.43

(Note) Rated ripple current : 105℃ , 120Hz

• The standard ratings follow the next page.

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
35	2200	22	20	S21	1.08
	2700	22	20	S21	1.20
	3300	22	20	S21	1.33
	3300	22	25	S22	1.43
	3300	25	20	S31	1.39
	3900	22	25	S22	1.55
	3900	22	30	S23	1.65
	3900	25	20	S31	1.51
	3900	30	20	S41	1.65
	4700	22	25	S22	1.71
	4700	22	30	S23	1.81
	4700	25	20	S31	1.66
	4700	25	25	S32	1.78
	4700	30	20	S41	1.82
	5600	22	30	S23	1.98
	5600	22	35	S24	2.02
	5600	25	25	S32	1.94
	5600	25	30	S33	2.04
	5600	30	20	S41	1.98
	5600	30	25	S42	2.12
	5600	35	20	S51	2.16
	6800	22	35	S24	2.23
	6800	22	40	S25	2.28
	6800	25	25	S32	2.14
	6800	25	30	S33	2.25
	6800	25	35	S34	2.31
	6800	30	25	S42	2.34
	6800	35	20	S51	2.38
	8200	22	35	S24	2.44
	8200	22	40	S25	2.50
	8200	22	50	S27	2.67
	8200	25	30	S33	2.47
	8200	25	35	S34	2.54
	8200	25	40	S35	2.60
	8200	30	25	S42	2.45
	8200	30	30	S43	2.56
	8200	35	20	S51	2.61
	8200	35	25	S52	2.78
	10000	22	40	S25	2.76
	10000	22	45	S26	2.83
	10000	25	35	S34	2.80
	10000	25	40	S35	2.87
	10000	25	45	S36	2.92
	10000	30	30	S43	2.83
	10000	30	35	S44	2.92
	10000	35	25	S52	3.07
	12000	22	45	S26	3.09
	12000	22	50	S27	3.23
	12000	25	40	S35	3.15
	12000	25	45	S36	3.20
	12000	25	50	S37	3.26
	12000	30	30	S43	3.10
	12000	30	35	S44	3.20
	12000	30	40	S45	3.28

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
35	12000	35	25	S52	3.14
	12000	35	30	S53	3.20
	15000	25	45	S36	3.58
	15000	25	50	S37	3.64
	15000	30	35	S44	3.58
	15000	30	40	S45	3.67
	15000	30	45	S46	3.74
	15000	35	30	S53	3.58
	15000	35	35	S54	3.69
	18000	25	50	S37	3.99
	18000	30	40	S45	4.02
	18000	30	45	S46	4.10
	18000	35	30	S53	3.92
	18000	35	35	S54	4.04
	18000	35	40	S55	4.16
	22000	30	45	S46	4.53
	22000	30	50	S47	4.71
	22000	35	35	S54	4.47
	22000	35	40	S55	4.60
	22000	35	50	S57	4.92
	27000	30	50	S47	5.22
	27000	35	40	S55	5.09
	27000	35	45	S56	5.24
	33000	35	45	S56	5.80
	33000	35	50	S57	6.03
50	1200	22	20	S21	0.99
	1500	22	20	S21	1.11
	1800	22	20	S21	1.22
	1800	22	25	S22	1.31
	1800	25	20	S31	1.29
	2200	22	25	S22	1.45
	2200	25	20	S31	1.43
	2700	22	25	S22	1.60
	2700	22	30	S23	1.70
	2700	25	20	S31	1.58
	2700	25	25	S32	1.70
	2700	30	20	S41	1.73
	3300	22	30	S23	1.88
	3300	22	35	S24	1.98
	3300	25	25	S32	1.88
	3300	25	30	S33	2.00
	3300	30	20	S41	1.91
	3300	35	20	S51	2.10
	3900	22	30	S23	2.04
	3900	22	35	S24	2.15
	3900	22	40	S25	2.25
	3900	25	25	S32	2.04
	3900	25	30	S33	2.17
	3900	25	35	S34	2.28
	3900	30	20	S41	2.08
	3900	30	25	S42	2.22
	3900	35	20	S51	2.28
	4700	22	35	S24	2.36
	4700	22	40	S25	2.47

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
50	4700	22	45	S26	2.56
	4700	25	30	S33	2.39
	4700	25	35	S34	2.50
	4700	30	25	S42	2.44
	4700	30	30	S43	2.58
	4700	35	20	S51	2.51
	4700	35	25	S52	2.67
	5600	22	40	S25	2.70
	5600	22	45	S26	2.79
	5600	22	50	S27	2.89
	5600	25	35	S34	2.73
	5600	25	40	S35	2.81
	5600	30	25	S42	2.66
	5600	30	30	S43	2.82
	5600	30	35	S44	2.95
	5600	35	25	S52	2.91
	6800	22	45	S26	3.08
	6800	22	50	S27	3.18
	6800	25	40	S35	3.10
	6800	25	45	S36	3.24
	6800	25	50	S37	3.37
	6800	30	30	S43	3.10
	6800	30	35	S44	3.25
	6800	30	40	S45	3.39
	6800	35	25	S52	3.21
	6800	35	30	S53	3.31
	8200	22	50	S27	3.50
	8200	25	40	S35	3.40
	8200	25	45	S36	3.56
	8200	30	35	S44	3.57
	8200	30	40	S45	3.72
	8200	30	45	S46	3.89
	8200	35	30	S53	3.63
	8200	35	35	S54	3.66
	10000	25	45	S36	3.93
	10000	25	50	S37	4.09
	10000	30	40	S45	3.90
	10000	30	45	S46	4.00
	10000	30	50	S47	4.09
	10000	35	30	S53	4.01
	10000	35	35	S54	4.05
	10000	35	40	S55	4.07
	12000	30	45	S46	4.30
	12000	30	50	S47	4.68
	12000	35	35	S54	4.43
	12000	35	40	S55	4.46
	12000	35	45	S56	4.50
	15000	30	50	S47	4.95
	15000	35	40	S55	4.98
	15000	35	45	S56	5.03
	18000	35	45	S56	5.51
	18000	35	50	S57	5.73
	22000	35	50	S57	6.33

(Note) Rated ripple current : 105℃ , 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
63	820	22	20	S21	0.96
	1000	22	20	S21	1.06
	1200	22	20	S21	1.11
	1200	22	25	S22	1.25
	1200	25	20	S31	1.16
	1500	22	25	S22	1.40
	1500	25	20	S31	1.29
	1800	22	25	S22	1.46
	1800	22	30	S23	1.60
	1800	25	20	S31	1.42
	1800	25	25	S32	1.52
	1800	30	20	S41	1.47
	2200	22	30	S23	1.68
	2200	22	35	S24	1.73
	2200	25	25	S32	1.68
	2200	25	30	S33	1.75
	2200	30	20	S41	1.63
	2200	35	20	S51	1.85
	2700	22	30	S23	1.86
	2700	22	35	S24	1.92
	2700	22	40	S25	1.97
	2700	25	25	S32	1.86
	2700	25	30	S33	1.94
	2700	25	35	S34	1.99
	2700	30	20	S41	1.81
	2700	30	25	S42	1.93
	2700	35	20	S51	2.05
	3300	22	35	S24	2.12
	3300	22	40	S25	2.18
	3300	22	50	S27	2.32
	3300	25	30	S33	2.14
	3300	25	35	S34	2.20
	3300	25	40	S35	2.27
	3300	30	25	S42	2.13
	3300	30	30	S43	2.24
	3300	35	20	S51	2.26
	3300	35	25	S52	2.41
	3900	22	40	S25	2.37
	3900	22	45	S26	2.42
	3900	25	35	S34	2.39
	3900	25	40	S35	2.47
	3900	25	45	S36	2.54
	3900	30	25	S42	2.32
	3900	30	30	S43	2.44
	3900	30	35	S44	2.55
	3900	35	25	S52	2.62
	4700	22	45	S26	2.65
	4700	22	50	S27	2.77
	4700	25	40	S35	2.71
	4700	25	45	S36	2.79
	4700	25	50	S37	2.88
	4700	30	30	S43	2.67
	4700	30	35	S44	2.80
	4700	30	40	S45	2.90
	4700	35	25	S52	2.72

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
63	4700	35	30	S53	2.83
	5600	25	45	S36	3.04
	5600	25	50	S37	3.14
	5600	30	35	S44	3.06
	5600	30	40	S45	3.17
	5600	30	45	S46	3.28
	5600	35	30	S53	3.09
	5600	35	35	S54	3.24
	6800	25	50	S37	3.46
	6800	30	40	S45	3.49
	6800	30	45	S46	3.61
	6800	30	50	S47	3.73
	6800	35	30	S53	3.40
	6800	35	35	S54	3.57
	6800	35	40	S55	3.71
	8200	30	45	S46	3.97
	8200	30	50	S47	4.10
	8200	35	35	S54	3.92
	8200	35	40	S55	4.07
	8200	35	45	S56	4.16
	10000	30	50	S47	4.52
	10000	35	40	S55	4.50
	10000	35	45	S56	4.59
	10000	35	50	S57	4.69
	12000	35	45	S56	5.03
	12000	35	50	S57	5.14
	15000	35	50	S57	5.74
80	560	22	20	S21	0.85
	680	22	20	S21	0.94
	820	22	20	S21	1.03
	820	22	25	S22	1.11
	820	25	20	S31	1.07
	1000	22	25	S22	1.23
	1000	25	20	S31	1.18
	1200	22	25	S22	1.34
	1200	22	30	S23	1.39
	1200	25	20	S31	1.29
	1200	25	25	S32	1.39
	1200	30	20	S41	1.38
	1500	22	30	S23	1.55
	1500	22	35	S24	1.61
	1500	25	25	S32	1.55
	1500	25	30	S33	1.62
	1500	30	20	S41	1.55
	1500	35	20	S51	1.68
	1800	22	30	S23	1.70
	1800	22	35	S24	1.76
	1800	22	40	S25	1.83
	1800	25	25	S32	1.70
	1800	25	30	S33	1.77
	1800	30	20	S41	1.69
	1800	30	25	S42	1.81
	1800	35	20	S51	1.84
	2200	22	35	S24	1.95
	2200	22	40	S25	2.02

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
80	2200	22	45	S26	2.09
	2200	25	30	S33	1.96
	2200	25	35	S34	2.01
	2200	30	25	S42	2.00
	2200	30	30	S43	2.10
	2200	35	20	S51	2.04
	2200	35	25	S52	2.17
	2700	22	40	S25	2.24
	2700	22	45	S26	2.32
	2700	25	35	S34	2.23
	2700	25	40	S35	2.32
	2700	25	45	S36	2.43
	2700	30	25	S42	2.22
	2700	30	30	S43	2.33
	2700	30	35	S44	2.43
	2700	35	25	S52	2.40
	3300	22	45	S26	2.56
	3300	22	50	S27	2.67
	3300	25	35	S34	2.46
	3300	25	40	S35	2.57
	3300	25	50	S37	2.76
	3300	30	30	S43	2.57
	3300	30	35	S44	2.69
	3300	30	40	S45	2.78
	3300	35	25	S52	2.66
	3300	35	30	S53	2.71
	3900	22	50	S27	2.90
	3900	25	40	S35	2.79
	3900	25	45	S36	2.92
	3900	25	50	S37	3.00
	3900	30	35	S44	2.92
	3900	30	40	S45	3.02
	3900	30	45	S46	3.12
	3900	35	30	S53	2.95
	3900	35	35	S54	3.07
	4700	25	50	S37	3.29
	4700	30	40	S45	3.32
	4700	30	45	S46	3.43
	4700	30	50	S47	3.56
	4700	35	30	S53	3.23
	4700	35	35	S54	3.37
	4700	35	40	S55	3.50
	5600	30	45	S46	3.74
	5600	30	50	S47	3.89
	5600	35	35	S54	3.68
	5600	35	40	S55	3.82
	5600	35	45	S56	3.87
	6800	30	50	S47	4.03
	6800	35	40	S55	3.93
	6800	35	45	S56	4.03
	6800	35	50	S57	4.19
	8200	35	45	S56	4.32
	8200	35	50	S57	4.60
	10000	35	50	S57	5.08
	12000	35	50	S57	5.14

(Note) Rated ripple current : 105℃ , 120Hz

• The standard ratings follow the next page.

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
100	390	22	20	S21	0.83
	470	22	20	S21	0.91
	560	22	20	S21	0.99
	560	22	25	S22	1.07
	560	25	20	S31	1.04
	680	22	25	S22	1.18
	680	25	20	S31	1.14
	820	22	25	S22	1.29
	820	22	30	S23	1.35
	820	25	20	S31	1.26
	820	25	25	S32	1.35
	820	30	20	S41	1.32
	1000	22	30	S23	1.49
	1000	22	35	S24	1.54
	1000	25	25	S32	1.49
	1000	25	30	S33	1.56
	1000	30	20	S41	1.46
	1000	35	20	S51	1.59
	1200	22	30	S23	1.63
	1200	22	35	S24	1.69
	1200	22	40	S25	1.74
	1200	25	25	S32	1.63
	1200	25	30	S33	1.71
	1200	25	35	S34	1.76
	1200	30	20	S41	1.60
	1200	30	25	S42	1.71
	1200	35	20	S51	1.74
	1500	22	35	S24	1.89
	1500	22	40	S25	1.95
	1500	22	45	S26	1.99
	1500	25	30	S33	1.91
	1500	25	35	S34	1.97
	1500	25	40	S35	2.03
	1500	30	25	S42	1.91
	1500	30	30	S43	2.00
	1500	35	20	S51	1.94
	1500	35	25	S52	2.07
	1800	22	40	S25	2.13
	1800	22	45	S26	2.18
	1800	25	35	S34	2.16
	1800	25	40	S35	2.22

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
100	1800	25	45	S36	2.28
	1800	30	25	S42	2.09
	1800	30	30	S43	2.19
	1800	30	35	S44	2.27
	1800	35	25	S52	2.27
	2200	22	45	S26	2.41
	2200	22	50	S27	2.52
	2200	25	40	S35	2.46
	2200	25	45	S36	2.52
	2200	25	50	S37	2.57
	2200	30	30	S43	2.42
	2200	30	35	S44	2.51
	2200	30	40	S45	2.59
	2200	35	25	S52	2.51
	2200	35	30	S53	2.56
	2700	25	45	S36	2.79
	2700	25	50	S37	2.85
	2700	30	35	S44	2.78
	2700	30	40	S45	2.87
	2700	30	45	S46	2.94
	2700	35	30	S53	2.79
	2700	35	35	S54	2.90
	3300	25	50	S37	3.15
	3300	30	40	S45	3.17
	3300	30	45	S46	3.25
	3300	30	50	S47	3.32
	3300	35	30	S53	3.09
	3300	35	35	S54	3.21
	3300	35	40	S55	3.31
	3900	30	45	S46	3.53
	3900	30	50	S47	3.61
	3900	35	35	S54	3.49
	3900	35	40	S55	3.60
	3900	35	45	S56	3.69
	4700	30	50	S47	3.96
	4700	35	40	S55	3.95
	4700	35	45	S56	4.05
	4700	35	50	S57	4.14
	5600	35	45	S56	4.42
	5600	35	50	S57	4.52
	6800	35	50	S57	4.98

(Note) Rated ripple current : 105℃ , 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
160	330	22	25	S22	1.16
	390	22	30	S23	1.43
	470	22	35	S24	1.52
	470	25	25	S32	1.55
	560	22	40	S25	1.62
	560	25	30	S33	1.73
	680	22	45	S26	1.70
	680	25	35	S34	1.81
	680	30	25	S42	1.82
	820	22	50	S27	1.81
	820	25	40	S35	1.98
	820	30	30	S43	1.98
	820	35	25	S52	1.93
	1000	25	45	S36	2.04
	1000	30	35	S44	2.14
	1200	25	50	S37	2.12
	1200	30	40	S45	2.22
	1200	35	30	S53	2.74
	1500	30	45	S46	2.46
	1500	35	35	S54	2.53
	1800	35	45	S56	2.98
	2200	35	50	S57	3.10
180	270	22	25	S22	1.08
	330	22	30	S23	1.30
	390	25	25	S32	1.35
	470	22	35	S24	1.58
	470	25	30	S33	1.62
	560	22	40	S25	1.79
	560	25	35	S34	1.69
	560	30	25	S42	1.67
	680	22	50	S27	1.76
	680	25	40	S35	1.72
	680	30	30	S43	1.74
	680	35	25	S52	1.92
	820	25	45	S36	1.78
	820	30	35	S44	1.85
	1000	25	50	S37	1.91
	1000	30	40	S45	2.01
	1000	35	30	S53	2.16
	1200	30	45	S46	2.19
	1200	35	35	S54	2.34
	1500	30	50	S47	2.36
	1500	35	40	S55	2.56
	1800	35	45	S56	2.67
200	220	22	25	S22	1.08
	330	22	30	S23	1.30

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
200	330	25	25	S32	1.35
	390	22	35	S24	1.41
	470	22	40	S25	1.50
	470	25	30	S33	1.50
	470	30	25	S42	1.56
	560	22	45	S26	1.58
	560	25	35	S34	1.65
	680	22	50	S27	1.68
	680	25	40	S35	1.80
	680	30	30	S43	1.82
	680	35	25	S52	1.96
	820	25	50	S37	1.87
	820	30	35	S44	1.99
	820	35	30	S53	2.07
	1000	30	45	S46	2.22
	1000	35	35	S54	2.22
	1200	30	50	S47	2.89
	1200	35	40	S55	2.42
	1500	35	45	S56	2.59
	1800	35	50	S57	2.70
250	180	22	25	S22	0.94
	220	22	30	S23	1.10
	220	25	25	S32	1.15
	270	22	35	S24	1.13
	330	22	40	S25	1.20
	330	25	30	S33	1.35
	330	30	25	S42	1.30
	390	22	45	S26	1.26
	390	25	35	S34	1.41
	470	22	50	S27	1.37
	470	25	40	S35	1.52
	470	30	30	S43	1.36
	470	35	25	S52	1.40
	560	25	45	S36	1.59
	560	30	35	S44	1.57
	560	35	30	S53	1.56
	680	25	50	S37	2.20
	680	30	40	S45	1.76
	820	30	45	S46	1.83
	820	35	35	S54	2.35
	1000	30	50	S47	1.87
	1000	35	40	S55	2.90
	1200	35	45	S56	3.30
400	68	22	25	S22	0.47
	82	22	30	S23	0.56
	82	25	25	S32	0.65

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
400	120	22	35	S24	0.75
	120	25	30	S33	0.70
	120	30	25	S42	0.78
	150	22	40	S25	0.82
	150	25	35	S34	0.73
	180	22	50	S27	0.78
	180	25	40	S35	0.82
	180	30	30	S43	0.83
	180	35	25	S52	0.86
	220	25	45	S36	0.87
	220	30	35	S44	0.86
	270	25	50	S37	0.94
	270	30	40	S45	0.95
	270	35	30	S53	0.91
	330	30	45	S46	1.11
	330	35	35	S54	1.13
	390	30	50	S47	1.15
	390	35	40	S55	1.26
	470	35	45	S56	1.31
	560	35	50	S57	1.50
450	56	22	25	S22	0.47
	68	22	30	S23	0.56
	68	25	25	S32	0.65
	82	22	35	S24	0.64
	100	22	40	S25	0.70
	100	25	30	S33	0.70
	100	30	25	S42	0.78
	120	22	45	S26	0.73
	120	25	35	S34	0.73
	150	22	50	S27	0.78
	150	25	40	S35	0.82
	150	30	30	S43	0.83
	150	35	25	S52	0.86
	180	25	45	S36	0.87
	180	30	35	S44	0.86
	220	25	50	S37	0.94
	220	30	40	S45	0.95
	220	35	30	S53	0.91
	270	30	45	S46	1.11
	270	35	35	S54	1.13
	330	30	50	S47	1.15
	330	35	40	S55	1.26
	390	35	45	S56	1.31
	470	35	50	S57	1.50

(Note) Rated ripple current : 105℃ , 120Hz

LAT, LTT LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Ultra Miniaturized,High-Reliability,High-Ripple Capacitors

GREEN CAP | 105℃ 2000hours

- Best suited as input filters for various power supplies.
- Guarantees 2000 hours at 105℃.
- Best suited to On-Board-Charger for EV, PHEV.

Miniaturized, High ripple

LAT ⇦ LAH

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−25 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	$3\sqrt{CV}$ (after 5 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 160 to 250 / 315 to 500 tanδ (max.): 0.15 / 0.20 (20℃,120Hz)
Characteristics at high and low temperature	Percentage of capacitance change (%) −25℃: Within ±30% of the value at 20℃ Impedance ratio (max.) Z−25℃/Z+20℃: 4 (120Hz)
Endurance (105℃) (Applied ripple current)	Test time: 2000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 200% or less of the initial specified value
Shelf life (105℃)	Test time: 1000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±15% of initial value Tangent of the loss angle: 150% or less of the initial specified value Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

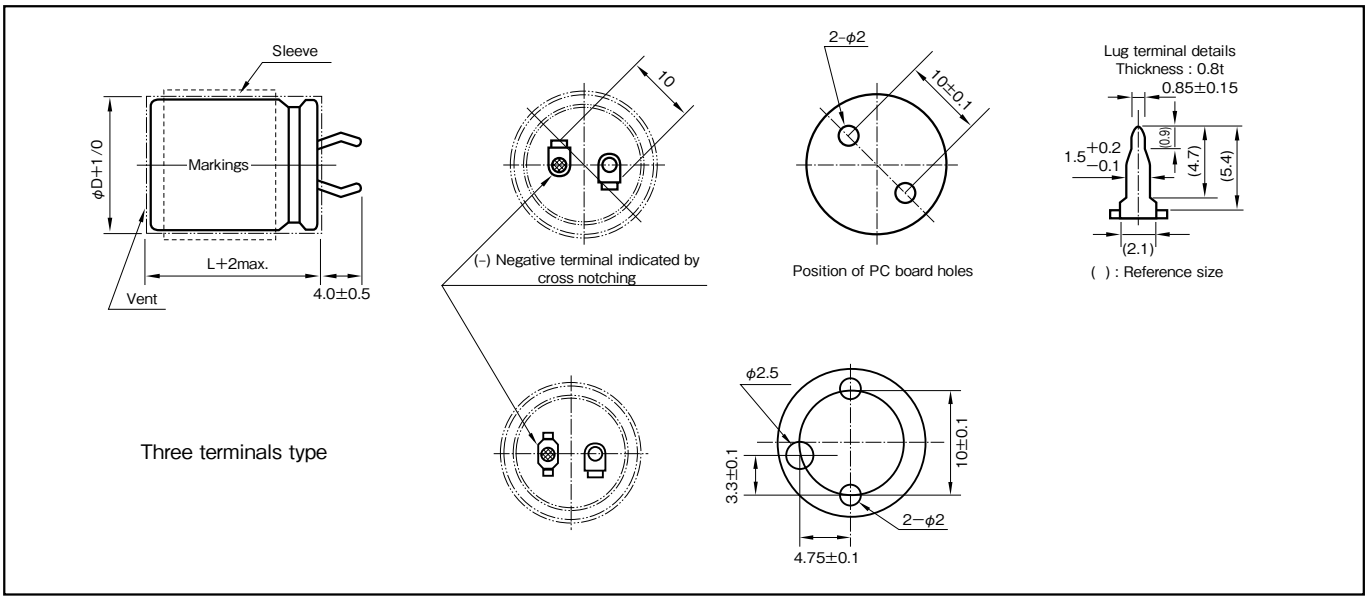

Part numbering system

series LAT, standard terminal type :400V220μF

LAT	—	400	V	221	M	S52	#	B
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol

series LTT, three terminals type :400V220μF

LTT	—	400	V	221	M	S52	#	B
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50	120	1k	10k	30k
160 to 250	0.81	1	1.32	1.45	1.50
315 or more	0.77	1	1.30	1.41	1.43

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
160	220	22	20	S21	0.90
	270	22	20	S21	1.00
	270	25	20	S31	1.13
	330	22	20	S21	1.10
	330	25	20	S31	1.25
	390	22	25	S22	1.35
	390	25	20	S31	1.36
	390	30	20	S41	1.37
	470	22	25	S22	1.48
	470	22	30	S23	1.50
	470	25	25	S32	1.53
	470	30	20	S41	1.50
	560	22	30	S23	1.68
	560	22	35	S24	1.75
	560	25	25	S32	1.63
	560	30	20	S41	1.63
	560	35	20	S51	1.82
	680	22	35	S24	1.93
	680	22	40	S25	1.98
	680	25	30	S33	1.91
	680	30	20	S41	1.80
	680	30	25	S42	1.85
	680	35	20	S51	2.01
	820	22	35	S24	2.08
	820	22	40	S25	2.17
	820	22	45	S26	2.19
	820	25	30	S33	2.09
	820	25	35	S34	2.17
	820	30	25	S42	2.03
	820	35	20	S51	2.20
	1000	22	45	S26	2.42
	1000	22	50	S27	2.60
	1000	25	35	S34	2.40
	1000	25	40	S35	2.47
	1000	30	30	S43	2.45
	1000	35	25	S52	2.60
	1200	22	50	S27	2.84
	1200	25	40	S35	2.84

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
160	1200	25	45	S36	2.90
	1200	30	30	S43	2.84
	1200	30	35	S44	2.96
	1200	35	25	S52	2.69
	1500	22	60	S29	3.41
	1500	25	45	S36	3.25
	1500	25	50	S37	3.38
	1500	30	35	S44	3.10
	1500	30	40	S45	3.21
	1500	35	30	S53	3.06
	1800	25	55	S38	3.84
	1800	30	40	S45	3.52
	1800	30	45	S46	3.91
	1800	35	30	S53	3.35
	1800	35	35	S54	3.52
	2200	30	45	S46	4.03
	2200	30	50	S47	4.16
	2200	35	35	S54	3.89
	2200	35	40	S55	4.36
	2200	35	45	S56	4.59
	2700	30	55	S48	4.76
	2700	35	50	S57	5.03
	3300	35	50	S57	5.47
	3900	35	55	S58	6.18
180	220	22	20	S21	0.91
	270	22	20	S21	1.00
	270	25	20	S31	1.14
	330	22	25	S22	1.25
	330	25	20	S31	1.20
	390	22	25	S22	1.35
	470	22	25	S22	1.49
	470	22	30	S23	1.55
	470	25	25	S32	1.56
	470	30	20	S41	1.50
	560	22	30	S23	1.69
	560	22	35	S24	1.73
	560	25	25	S32	1.67
	560	25	30	S33	1.74

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
180	560	30	20	S41	1.64
	560	35	20	S51	1.66
	680	22	35	S24	1.90
	680	25	30	S33	1.91
	680	30	25	S42	1.86
	680	35	20	S51	1.83
	820	22	40	S25	2.17
	820	25	35	S34	2.14
	820	30	25	S42	2.04
	820	30	30	S43	2.17
	820	35	20	S51	2.01
	820	35	25	S52	2.11
	1000	22	45	S26	2.44
	1000	25	40	S35	2.43
	1000	30	30	S43	2.39
	1000	35	25	S52	2.33
	1200	22	50	S27	2.74
	1200	25	45	S36	2.73
	1200	30	30	S43	2.62
	1200	30	35	S44	2.66
	1200	35	25	S52	2.55
	1200	35	30	S53	2.65
	1500	25	50	S37	3.12
	1500	25	55	S38	3.38
	1500	30	40	S45	3.01
	1500	35	30	S53	2.96
	1500	35	35	S54	3.02
	1800	25	60	S39	3.83
	1800	30	45	S46	3.42
	1800	35	35	S54	3.31
	2200	30	50	S47	3.83
	2200	35	40	S55	3.73
	2700	30	60	S49	4.64
	2700	35	45	S56	4.25
	3300	35	55	S58	4.92
	3900	35	60	S59	5.53

(Note) Rated ripple current : 105℃ , 120Hz

• The standard ratings follow the next page.

LAT, LTT LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
200	150	22	20	S21	0.76
	180	22	20	S21	0.82
	180	25	20	S31	0.93
	220	22	20	S21	0.91
	270	22	20	S21	1.00
	270	25	20	S31	1.09
	330	22	25	S22	1.29
	330	25	20	S31	1.18
	330	30	20	S41	1.26
	390	22	25	S22	1.35
	390	22	30	S23	1.40
	390	25	25	S32	1.37
	390	30	20	S41	1.37
	470	22	30	S23	1.53
	470	25	25	S32	1.50
	470	30	20	S41	1.50
	470	35	20	S51	1.67
	560	22	30	S23	1.69
	560	22	35	S24	1.73
	560	25	25	S32	1.64
	560	25	30	S33	1.70
	560	30	20	S41	1.64
	560	30	25	S42	1.75
	560	35	20	S51	1.82
	680	22	35	S24	1.90
	680	22	40	S25	1.97
	680	25	30	S33	1.87
	680	25	35	S34	1.95
	680	30	25	S42	1.92
	680	35	20	S51	1.92
	820	22	40	S25	2.17
	820	22	45	S26	2.21
	820	25	35	S34	2.14
	820	25	40	S35	2.20
	820	30	25	S42	2.04
	820	30	30	S43	2.17
	820	35	25	S52	2.07
	1000	22	50	S27	2.50
	1000	25	40	S35	2.43
	1000	25	45	S36	2.49
	1000	30	30	S43	2.39
	1000	30	35	S44	2.40
	1000	35	25	S52	2.29
	1000	35	30	S53	2.40
	1200	22	60	S29	2.93

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
200	1200	25	45	S36	2.73
	1200	25	50	S37	2.82
	1200	30	35	S44	2.63
	1200	30	40	S45	2.69
	1200	35	30	S53	2.63
	1500	25	55	S38	3.38
	1500	30	40	S45	3.01
	1500	30	45	S46	3.12
	1500	35	30	S53	2.96
	1500	35	35	S54	2.97
	1800	30	45	S46	3.42
	1800	30	50	S47	3.54
	1800	35	35	S54	3.25
	1800	35	40	S55	3.59
	1800	35	45	S56	4.00
	2200	30	55	S48	4.06
	2200	35	40	S55	3.73
	2200	35	45	S56	4.13
	2700	35	50	S57	5.09
	3300	35	60	S59	6.03
250	120	22	20	S21	0.67
	150	22	20	S21	0.75
	150	25	20	S31	0.92
	180	22	20	S21	0.82
	180	25	20	S31	1.01
	220	22	25	S22	1.11
	220	25	20	S31	1.02
	220	30	20	S41	1.03
	270	22	25	S22	1.13
	270	22	30	S23	1.25
	270	25	20	S31	1.07
	270	25	25	S32	1.15
	270	30	20	S41	1.14
	330	22	30	S23	1.30
	330	22	35	S24	1.50
	330	25	25	S32	1.27
	330	30	20	S41	1.26
	330	35	20	S51	1.30
	390	22	30	S23	1.38
	390	22	35	S24	1.52
	390	25	25	S32	1.38
	390	25	30	S33	1.41
	390	30	20	S41	1.37
	390	30	25	S42	1.47
	390	35	20	S51	1.41

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
250	470	22	35	S24	1.58
	470	22	40	S25	1.64
	470	25	30	S33	1.61
	470	25	35	S34	1.63
	470	30	25	S42	1.61
	470	35	20	S51	1.55
	560	22	40	S25	1.79
	560	22	45	S26	1.82
	560	25	35	S34	1.77
	560	25	40	S35	1.82
	560	30	25	S42	1.69
	560	30	30	S43	1.80
	560	35	20	S51	1.66
	560	35	25	S52	1.80
	680	22	45	S26	2.01
	680	22	50	S27	2.06
	680	25	40	S35	2.01
	680	25	45	S36	2.06
	680	25	55	S38	2.28
	680	30	30	S43	1.98
	680	30	35	S44	2.04
	680	35	25	S52	1.98
	680	35	30	S53	2.04
	820	22	55	S28	2.34
	820	25	45	S36	2.26
	820	25	50	S37	2.42
	820	30	35	S44	2.24
	820	35	25	S52	2.07
	820	35	30	S53	2.24
	1000	25	50	S37	2.57
	1000	30	40	S45	2.67
	1000	35	30	S53	2.47
	1000	35	35	S54	2.60
	1200	30	45	S46	2.79
	1200	30	50	S47	2.89
	1200	35	35	S54	2.85
	1200	35	40	S55	3.18
	1500	30	50	S47	3.23
	1500	35	40	S55	3.28
	1500	35	45	S56	3.69
	1500	35	50	S57	3.80
	1800	35	45	S56	3.74
	1800	35	50	S57	4.16
	2200	35	50	S57	4.23

(Note) Rated ripple current : 105℃ , 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
315	68	22	20	S21	0.50
	82	22	20	S21	0.55
	100	22	20	S21	0.61
	100	25	20	S31	0.69
	120	22	20	S21	0.67
	120	22	25	S22	0.75
	150	22	25	S22	0.84
	150	22	30	S23	0.88
	150	25	20	S31	0.80
	150	30	20	S41	0.85
	180	22	25	S22	0.92
	180	22	30	S23	0.96
	180	22	35	S24	0.98
	180	25	25	S32	0.97
	180	30	20	S41	0.93
	180	35	20	S51	0.94
	220	22	30	S23	1.06
	220	22	40	S25	1.12
	220	25	25	S32	1.07
	220	25	30	S33	1.09
	220	30	20	S41	1.03
	270	22	35	S24	1.20
	270	22	45	S26	1.27
	270	25	30	S33	1.20
	270	25	35	S34	1.23
	270	30	25	S42	1.17
	270	35	20	S51	1.15
	330	22	35	S24	1.33
	330	22	50	S27	1.44
	330	25	30	S33	1.33
	330	25	40	S35	1.40
	330	30	25	S42	1.29
	330	30	30	S43	1.37
	330	35	20	S51	1.28
	330	35	25	S52	1.31
	390	22	45	S26	1.52
	390	25	35	S34	1.48
	390	25	45	S36	1.56
	390	30	30	S43	1.49
	390	30	35	S44	1.52
	390	35	25	S52	1.43
	470	22	50	S27	1.72
	470	25	40	S35	1.67
	470	25	50	S37	1.83
	470	30	30	S43	1.64
	470	30	40	S45	1.69
	470	35	25	S52	1.57
	470	35	30	S53	1.66
	560	22	55	S28	1.94
	560	25	45	S36	1.87
	560	30	35	S44	1.82
	560	30	45	S46	1.91
	560	35	30	S53	1.81
	560	35	35	S54	1.85

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
315	680	25	55	S38	2.20
	680	30	40	S45	2.03
	680	30	50	S47	2.18
	680	35	30	S53	2.00
	680	35	40	S55	2.07
	820	25	60	S39	2.49
	820	30	45	S46	2.31
	820	35	35	S54	2.24
	820	35	45	S56	2.34
	1000	30	55	S48	2.67
	1000	35	40	S55	2.52
	1200	30	60	S49	2.97
	1200	35	50	S57	2.86
	1500	35	55	S58	3.31
350	56	22	20	S21	0.46
	82	22	20	S21	0.55
	82	25	20	S31	0.63
	100	22	20	S21	0.61
	100	22	25	S22	0.69
	100	25	20	S31	0.69
	120	22	20	S21	0.67
	120	22	25	S22	0.75
	120	22	30	S23	0.78
	120	25	20	S31	0.72
	120	30	20	S41	0.76
	150	22	25	S22	0.84
	150	22	30	S23	0.88
	150	22	35	S24	0.89
	150	25	20	S31	0.79
	150	25	25	S32	0.88
	150	30	20	S41	0.85
	150	35	20	S51	0.86
	180	22	30	S23	0.96
	180	22	35	S24	0.98
	180	22	40	S25	1.02
	180	25	25	S32	0.97
	180	25	30	S33	0.99
	180	30	20	S41	0.93
	180	35	20	S51	0.94
	220	22	30	S23	1.06
	220	22	35	S24	1.08
	220	22	45	S26	1.14
	220	25	25	S32	1.07
	220	25	30	S33	1.09
	220	25	35	S34	1.11
	220	30	20	S41	1.03
	220	30	25	S42	1.06
	220	35	20	S51	1.04
	270	22	35	S24	1.20
	270	22	40	S25	1.24
	270	22	45	S26	1.27
	270	22	50	S27	1.30
	270	25	30	S33	1.21
	270	25	35	S34	1.23

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
350	270	25	40	S35	1.27
	270	30	25	S42	1.17
	270	30	30	S43	1.24
	270	35	20	S51	1.15
	270	35	25	S52	1.19
	330	22	40	S25	1.37
	330	22	45	S26	1.40
	330	25	35	S34	1.36
	330	25	40	S35	1.40
	330	25	45	S36	1.43
	330	30	25	S42	1.29
	330	30	30	S43	1.37
	330	30	35	S44	1.40
	330	35	25	S52	1.31
	390	22	50	S27	1.56
	390	25	40	S35	1.52
	390	25	45	S36	1.56
	390	25	50	S37	1.66
	390	30	30	S43	1.49
	390	30	35	S44	1.52
	390	30	40	S45	1.54
	390	35	25	S52	1.43
	390	35	30	S53	1.51
	470	22	55	S28	1.78
	470	25	45	S36	1.71
	470	25	50	S37	1.83
	470	30	35	S44	1.67
	470	30	40	S45	1.69
	470	30	45	S46	1.75
	470	35	30	S53	1.66
	470	35	35	S54	1.69
	560	25	50	S37	1.90
	560	30	40	S45	1.84
	560	30	45	S46	1.91
	560	30	50	S47	1.97
	560	35	30	S53	1.81
	560	35	35	S54	1.85
	560	35	40	S55	1.88
	680	22	60	S29	2.21
	680	30	45	S46	2.10
	680	30	50	S47	2.18
	680	35	35	S54	2.04
	680	35	40	S55	2.07
	680	35	45	S56	2.14
	820	30	50	S47	2.32
	820	35	40	S55	2.28
	820	35	45	S56	2.34
	820	35	50	S57	2.36
	1000	30	60	S49	2.72
	1000	35	45	S56	2.59
	1000	35	50	S57	2.61
	1200	35	55	S58	2.96

(Note) Rated ripple current : 105℃ , 120Hz

• The standard ratings follow the next page.

LAT, LTT LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS ELNA®

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
400	56	22	20	S21	0.53
	68	22	20	S21	0.58
	68	25	20	S31	0.66
	82	22	20	S21	0.64
	82	22	25	S22	0.71
	82	25	20	S31	0.68
	82	30	20	S41	0.72
	100	22	20	S21	0.70
	100	22	25	S22	0.79
	100	25	20	S31	0.75
	100	30	20	S41	0.80
	120	22	25	S22	0.86
	120	22	30	S23	0.90
	120	25	20	S31	0.82
	120	25	25	S32	0.88
	120	30	20	S41	0.87
	120	35	20	S51	0.89
	150	22	30	S23	0.99
	150	22	35	S24	1.03
	150	25	25	S32	0.99
	150	25	30	S33	1.01
	150	30	20	S41	0.98
	150	35	20	S51	0.99
	180	22	30	S23	1.10
	180	22	35	S24	1.13
	180	22	40	S25	1.17
	180	25	25	S32	1.09
	180	25	30	S33	1.11
	180	30	20	S41	1.07
	180	30	25	S42	1.10
	180	35	20	S51	1.08
	220	22	35	S24	1.25
	220	22	40	S25	1.29
	220	22	45	S26	1.32
	220	25	30	S33	1.23
	220	25	35	S34	1.28
	220	30	25	S42	1.22
	220	30	30	S43	1.25
	220	35	20	S51	1.20
	220	35	25	S52	1.23
	270	22	40	S25	1.43
	270	22	45	S26	1.46
	270	22	50	S27	1.50
	270	25	35	S34	1.42
	270	25	40	S35	1.45
	270	30	25	S42	1.35
	270	30	30	S43	1.39
	270	35	25	S52	1.37
	330	22	45	S26	1.61
	330	22	50	S27	1.65
	330	25	40	S35	1.61
	330	25	45	S36	1.65

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
400	330	30	30	S43	1.53
	330	30	35	S44	1.61
	330	35	25	S52	1.51
	330	35	30	S53	1.56
	390	22	55	S28	1.86
	390	25	45	S36	1.79
	390	25	50	S37	1.85
	390	30	35	S44	1.75
	390	30	40	S45	1.77
	390	35	30	S53	1.69
	390	35	35	S54	1.76
	470	25	50	S37	2.04
	470	30	40	S45	1.94
	470	30	45	S46	2.01
	470	35	30	S53	1.86
	470	35	35	S54	1.93
	560	25	60	S39	2.46
	560	30	45	S46	2.19
	560	30	50	S47	2.27
	560	35	35	S54	2.11
	560	35	40	S55	2.16
	680	30	50	S47	2.50
	680	35	40	S55	2.39
	680	35	45	S56	2.53
	680	35	50	S57	2.73
	820	30	60	S49	2.94
	820	35	45	S56	2.70
	820	35	50	S57	3.00
	1000	35	55	S58	3.43
450	56	22	20	S21	0.53
	56	25	20	S31	0.60
	68	22	20	S21	0.58
	68	22	25	S22	0.65
	68	25	20	S31	0.66
	82	22	25	S22	0.71
	82	25	20	S31	0.68
	82	30	20	S41	0.72
	100	22	25	S22	0.79
	100	22	30	S23	0.82
	100	25	25	S32	0.81
	100	30	20	S41	0.80
	120	22	30	S23	0.90
	120	22	35	S24	0.92
	120	25	25	S32	0.88
	120	25	30	S33	0.93
	120	30	20	S41	0.87
	120	35	20	S51	0.89
	150	22	35	S24	1.03
	150	22	40	S25	1.05
	150	25	30	S33	1.03
	150	30	25	S42	1.00
	150	35	20	S51	0.99

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
450	180	22	40	S25	1.17
	180	22	45	S26	1.19
	180	25	30	S33	1.13
	180	25	35	S34	1.16
	180	30	25	S42	1.10
	180	30	30	S43	1.14
	180	35	20	S51	1.08
	180	35	25	S52	1.12
	220	22	45	S26	1.32
	220	22	50	S27	1.35
	220	25	35	S34	1.28
	220	25	40	S35	1.31
	220	25	45	S36	1.35
	220	30	25	S42	1.22
	220	30	30	S43	1.27
	220	35	25	S52	1.23
	270	22	50	S27	1.50
	270	25	40	S35	1.45
	270	25	45	S36	1.49
	270	25	50	S37	1.54
	270	30	30	S43	1.43
	270	30	35	S44	1.45
	270	35	25	S52	1.37
	270	35	30	S53	1.44
	330	22	60	S29	1.78
	330	25	50	S37	1.76
	330	30	35	S44	1.61
	330	30	40	S45	1.62
	330	30	45	S46	1.68
	330	35	30	S53	1.60
	330	35	35	S54	1.62
	390	25	55	S38	1.98
	390	30	40	S45	1.77
	390	30	45	S46	1.83
	390	30	50	S47	2.07
	390	35	35	S54	1.76
	390	35	40	S55	2.00
	470	30	45	S46	2.01
	470	30	50	S47	2.13
	470	35	35	S54	1.93
	470	35	40	S55	2.20
	470	35	45	S56	2.27
	560	30	45	S46	2.19
	560	35	35	S54	2.11
	560	35	40	S55	2.40
	560	35	45	S56	2.48
	560	35	50	S57	2.50
	680	30	60	S49	2.68
	680	35	45	S56	2.59
	680	35	50	S57	2.61
	820	35	60	S59	3.07

(Note) Rated ripple current : 105℃ , 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
500	22	22	20	S21	0.24
	27	22	20	S21	0.28
	33	22	25	S22	0.44
	39	22	20	S21	0.44
	39	22	25	S22	0.49
	47	22	20	S21	0.48
	47	22	30	S23	0.56
	47	25	20	S31	0.55
	56	22	20	S21	0.53
	56	22	25	S22	0.59
	56	22	30	S23	0.61
	56	25	20	S31	0.57
	68	22	25	S22	0.65
	68	22	30	S23	0.68
	68	22	35	S24	0.70
	68	25	20	S31	0.62
	68	25	25	S32	0.68
	68	25	30	S33	0.70
	68	30	20	S41	0.66
	82	22	25	S22	0.71
	82	22	30	S23	0.74
	82	22	40	S25	0.79
	82	25	25	S32	0.73
	82	25	30	S33	0.77
	82	25	35	S34	0.79
	82	30	20	S41	0.72
	100	22	30	S23	0.82
	100	22	35	S24	0.84
	100	22	45	S26	0.89
	100	25	25	S32	0.81
	100	25	30	S33	0.85
	100	25	40	S35	0.89
	100	30	20	S41	0.80
	100	30	25	S42	0.82
	100	30	30	S43	0.87
	100	35	20	S51	0.81
	120	22	35	S24	0.92
	120	22	40	S25	0.95
	120	22	50	S27	1.00
	120	25	30	S33	0.92
	120	25	35	S34	0.95
	120	25	40	S35	0.97
	120	30	25	S42	0.90
	120	30	30	S43	0.93
	120	30	35	S44	0.97
	120	35	20	S51	0.89
	120	35	30	S53	0.94
	150	22	40	S25	1.07
	150	22	45	S26	1.09
	150	25	35	S34	1.05
	150	25	40	S35	1.08
500	150	25	45	S36	1.11
	150	30	25	S42	1.00
	150	30	30	S43	1.02
	150	30	40	S45	1.10
	150	35	20	S51	0.99
	150	35	25	S52	1.02
	150	35	35	S54	1.09
	180	22	45	S26	1.19
	180	22	50	S27	1.22
	180	25	40	S35	1.19
	180	25	45	S36	1.22
	180	25	50	S37	1.30
	180	30	30	S43	1.14
	180	30	35	S44	1.16
	180	30	45	S46	1.24
	180	35	25	S52	1.12
	180	35	30	S53	1.15
	220	22	55	S28	1.40
	220	25	45	S36	1.35
	220	25	50	S37	1.39
	220	30	35	S44	1.31
	220	30	40	S45	1.33
	220	30	50	S47	1.42
	220	35	25	S52	1.23
	220	35	30	S53	1.27
	220	35	40	S55	1.36
	270	22	60	S29	1.61
	270	25	50	S37	1.54
	270	30	40	S45	1.47
	270	30	45	S46	1.52
	270	30	50	S47	1.58
	270	35	30	S53	1.41
	270	35	35	S54	1.46
	270	35	40	S55	1.50
	330	25	60	S39	1.88
	330	30	45	S46	1.68
	330	30	50	S47	1.71
	330	35	35	S54	1.62
	330	35	40	S55	1.66
	330	35	45	S56	1.71
	390	30	50	S47	1.77
	390	35	40	S55	1.81
	390	35	45	S56	1.86
	390	35	50	S57	1.88
	470	30	55	S48	2.09
	470	35	45	S56	2.04
	470	35	50	S57	2.06
	560	35	50	S57	2.25
	560	35	55	S58	2.33
	680	35	60	S59	2.66

(Note) Rated ripple current : 105℃ , 120Hz

LAZ, LTZ LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

High-Reliability, High-Ripple, Long Life Capacitors

GREEN CAP | 105℃ 3000hours

- High-reliability, high-ripple, long life capacitors.
- Guarantees 3000 hours at 105°C.
- Best suited to On-Board-Charger for EV, PHEV.

Long life

LAZ ⇦ LAT

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +105 (−25 to +105 at 160V or more)
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	$3\sqrt{CV}$ (after 5 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	

Rated voltage (V)	16	25	35	50	63 to 100	160 to 250	350 to 500
tanδ (max.)	0.50	0.40	0.35	0.30	0.20	0.15	0.20

(20℃,120Hz)

Characteristics at high and low temperature

Rated voltage (V)		16 to 100	160 to 500
Impedance ratio (max.)	Z−25℃/Z+20℃	4	4
	Z−40℃/Z+20℃	15	—

(120Hz)

Endurance (105℃) (Applied ripple current)

Test time	3000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	200% or less of the initial specified value

Shelf life (105℃)

Test time	1000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±15% of initial value
Tangent of the loss angle	150% or less of the initial specified value

Voltage application treatment : According to JIS C5101-4 4.1

Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit: mm

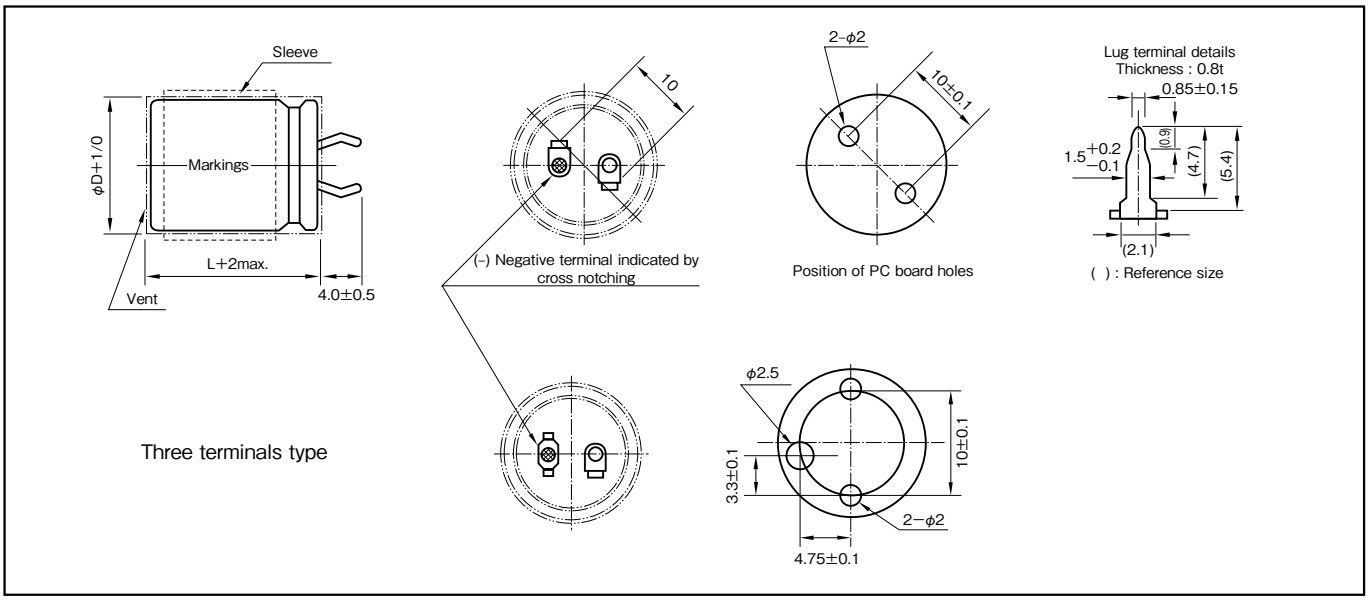

Part numbering system

series LAZ, standard terminal type :400V470μF

LAZ	—	400	V	471	M	S54	#	B
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol

series LTZ, three terminals type :400V470μF

LTZ	—	400	V	471	M	S54	#	B
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50	120	1k	10k	30k
100 or less	0.95	1	1.10	1.15	1.15
160 to 250	0.81	1	1.32	1.45	1.50
350 or more	0.77	1	1.30	1.41	1.43

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
16	4700	22	20	S21	1.23
	5600	22	20	S21	1.35
	6800	22	20	S21	1.48
	6800	22	25	S22	1.60
	6800	25	20	S31	1.53
	8200	22	25	S22	1.76
	8200	25	20	S31	1.68
	8200	30	20	S41	1.84
	10000	22	25	S22	1.94
	10000	22	30	S23	1.99
	10000	25	20	S31	1.85
	10000	25	25	S32	1.99
	10000	30	20	S41	2.03
	12000	22	30	S23	2.18
	12000	22	35	S24	2.28
	12000	25	25	S32	2.18
	12000	25	30	S33	2.30
	12000	30	20	S41	2.23
	12000	30	25	S42	2.38
	12000	35	20	S51	2.38
	15000	22	30	S23	2.44
	15000	22	35	S24	2.55
	15000	22	40	S25	2.64
	15000	25	25	S32	2.44
	15000	25	30	S33	2.57
	15000	25	35	S34	2.68
	15000	30	25	S42	2.66
	15000	35	20	S51	2.66
	18000	22	35	S24	2.79
	18000	22	40	S25	2.89
	18000	22	45	S26	2.98
	18000	25	30	S33	2.82
	18000	25	35	S34	2.94
	18000	25	40	S35	3.04
	18000	30	25	S42	2.91
	18000	30	30	S43	3.00
	18000	35	20	S51	2.91
	18000	35	25	S52	3.10
	22000	22	40	S25	3.20
	22000	22	45	S26	3.29
	22000	25	35	S34	3.25
	22000	25	40	S35	3.36
	22000	25	45	S36	3.40
	22000	30	30	S43	3.32
	22000	30	35	S44	3.39
	22000	35	25	S52	3.43
	27000	22	45	S26	3.65
	27000	22	50	S27	3.70
	27000	25	40	S35	3.72
	27000	25	45	S36	3.77
	27000	25	50	S37	3.81
	27000	30	30	S43	3.67
	27000	30	35	S44	3.76
	27000	30	40	S45	3.83

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
16	27000	35	25	S52	3.80
	27000	35	30	S53	3.82
	33000	22	50	S27	4.00
	33000	25	45	S36	4.16
	33000	25	50	S37	4.21
	33000	30	35	S44	4.15
	33000	30	40	S45	4.23
	33000	30	45	S46	4.30
	33000	35	30	S53	4.22
	33000	35	35	S54	4.24
	39000	25	50	S37	4.58
	39000	30	40	S45	4.60
	39000	30	45	S46	4.67
	39000	30	50	S47	4.74
	39000	35	30	S53	4.59
	39000	35	35	S54	4.61
	39000	35	40	S55	4.72
	47000	30	45	S46	5.13
	47000	30	50	S47	5.20
	47000	35	35	S54	5.06
	47000	35	40	S55	5.18
	47000	35	45	S56	5.27
	56000	30	50	S47	5.68
	56000	35	40	S55	5.66
	56000	35	45	S56	5.75
	68000	35	45	S56	6.34
	68000	35	50	S57	6.59
	82000	35	50	S57	7.23
25	3300	22	20	S21	1.21
	3900	22	20	S21	1.31
	4700	22	20	S21	1.44
	4700	22	25	S22	1.55
	4700	25	20	S31	1.48
	5600	22	25	S22	1.69
	5600	25	20	S31	1.61
	5600	30	20	S41	1.74
	6800	22	25	S22	1.86
	6800	22	30	S23	1.91
	6800	25	20	S31	1.78
	6800	25	25	S32	1.91
	6800	30	20	S41	1.92
	8200	22	30	S23	2.10
	8200	22	35	S24	2.14
	8200	25	25	S32	2.10
	8200	25	30	S33	2.16
	8200	30	20	S41	2.10
	8200	30	25	S42	2.25
	8200	35	20	S51	2.17
	10000	22	30	S23	2.32
	10000	22	35	S24	2.36
	10000	22	40	S25	2.40
	10000	25	25	S32	2.32
	10000	25	30	S33	2.39
	10000	25	35	S34	2.44

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
25	10000	30	25	S42	2.48
	10000	35	20	S51	2.40
	12000	22	35	S24	2.59
	12000	22	40	S25	2.63
	12000	22	45	S26	2.69
	12000	25	30	S33	2.61
	12000	25	35	S34	2.67
	12000	25	40	S35	2.74
	12000	30	25	S42	2.59
	12000	30	30	S43	2.70
	12000	35	20	S51	2.63
	12000	35	25	S52	2.80
	15000	22	40	S25	2.94
	15000	22	45	S26	3.01
	15000	25	35	S34	2.99
	15000	25	40	S35	3.06
	15000	25	45	S36	3.15
	15000	30	30	S43	3.02
	15000	30	35	S44	3.13
	15000	35	25	S52	3.13
	15000	35	30	S53	3.22
	18000	22	45	S26	3.29
	18000	22	50	S27	3.44
	18000	25	40	S35	3.36
	18000	25	45	S36	3.45
	18000	25	50	S37	3.54
	18000	30	30	S43	3.31
	18000	30	35	S44	3.43
	18000	30	40	S45	3.54
	18000	35	25	S52	3.43
	18000	35	30	S53	3.53
	22000	22	50	S27	3.80
	22000	25	45	S36	3.81
	22000	25	50	S37	3.91
	22000	30	35	S44	3.79
	22000	30	40	S45	3.91
	22000	30	45	S46	4.24
	22000	35	30	S53	3.90
	22000	35	35	S54	3.96
	27000	25	50	S37	4.34
	27000	30	40	S45	4.34
	27000	30	45	S46	4.70
	27000	35	35	S54	4.39
	27000	35	40	S55	4.56
	27000	35	45	S56	4.75
	33000	30	45	S46	5.19
	33000	30	50	S47	5.30
	33000	35	35	S54	4.85
	33000	35	40	S55	5.04
	33000	35	50	S57	5.39
	39000	30	50	S47	5.58
	39000	35	40	S55	5.48
	39000	35	45	S56	5.71
	47000	35	50	S57	6.43

(Note) Rated ripple current : 105℃ , 120Hz

• The standard ratings follow the next page.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications
from ELNA to ensure that the component is suitable for your use.

LAZ, LTZ LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
35	2200	22	20	S21	1.08
	2700	22	20	S21	1.20
	3300	22	20	S21	1.33
	3300	22	25	S22	1.43
	3300	25	20	S31	1.39
	3900	22	25	S22	1.55
	3900	22	30	S23	1.65
	3900	25	20	S31	1.51
	3900	30	20	S41	1.65
	4700	22	25	S22	1.71
	4700	22	30	S23	1.81
	4700	25	20	S31	1.66
	4700	25	25	S32	1.78
	4700	30	20	S41	1.82
	5600	22	30	S23	1.98
	5600	22	35	S24	2.02
	5600	25	25	S32	1.94
	5600	25	30	S33	2.04
	5600	30	20	S41	1.98
	5600	30	25	S42	2.12
	5600	35	20	S51	2.16
	6800	22	35	S24	2.23
	6800	22	40	S25	2.28
	6800	25	25	S32	2.14
	6800	25	30	S33	2.25
	6800	25	35	S34	2.31
	6800	30	25	S42	2.34
	6800	35	20	S51	2.38
	8200	22	35	S24	2.44
	8200	22	40	S25	2.50
	8200	22	50	S27	2.67
	8200	25	30	S33	2.47
	8200	25	35	S34	2.54
	8200	25	40	S35	2.60
	8200	30	25	S42	2.45
	8200	30	30	S43	2.56
	8200	35	20	S51	2.61
	8200	35	25	S52	2.78
	10000	22	40	S25	2.76
	10000	22	45	S26	2.83
	10000	25	35	S34	2.80
	10000	25	40	S35	2.87
	10000	25	45	S36	2.92
	10000	30	30	S43	2.83
	10000	30	35	S44	2.92
	10000	35	25	S52	3.07
	12000	22	45	S26	3.09
	12000	22	50	S27	3.23
	12000	25	40	S35	3.15
	12000	25	45	S36	3.20
	12000	25	50	S37	3.26
	12000	30	30	S43	3.10
	12000	30	35	S44	3.20
	12000	30	40	S45	3.28

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
35	12000	35	25	S52	3.14
	12000	35	30	S53	3.20
	15000	25	45	S36	3.58
	15000	25	50	S37	3.64
	15000	30	35	S44	3.58
	15000	30	40	S45	3.67
	15000	30	45	S46	3.74
	15000	35	30	S53	3.58
	15000	35	35	S54	3.69
	18000	25	50	S37	3.99
	18000	30	40	S45	4.02
	18000	30	45	S46	4.10
	18000	35	30	S53	3.92
	18000	35	35	S54	4.04
	18000	35	40	S55	4.16
	22000	30	45	S46	4.53
	22000	30	50	S47	4.71
	22000	35	35	S54	4.47
	22000	35	40	S55	4.60
	22000	35	50	S57	4.92
	27000	30	50	S47	5.22
	27000	35	40	S55	5.09
	27000	35	45	S56	5.24
	33000	35	45	S56	5.80
	33000	35	50	S57	6.03
50	1200	22	20	S21	0.99
	1500	22	20	S21	1.11
	1800	22	20	S21	1.22
	1800	22	25	S22	1.31
	1800	25	20	S31	1.29
	2200	22	25	S22	1.45
	2200	25	20	S31	1.43
	2700	22	25	S22	1.60
	2700	22	30	S23	1.70
	2700	25	20	S31	1.58
	2700	25	25	S32	1.70
	2700	30	20	S41	1.73
	3300	22	30	S23	1.88
	3300	22	35	S24	1.98
	3300	25	25	S32	1.88
	3300	25	30	S33	2.00
	3300	30	20	S41	1.91
	3300	35	20	S51	2.10
	3900	22	30	S23	2.04
	3900	22	35	S24	2.15
	3900	22	40	S25	2.25
	3900	25	25	S32	2.04
	3900	25	30	S33	2.17
	3900	25	35	S34	2.28
	3900	30	20	S41	2.08
	3900	30	25	S42	2.22
	3900	35	20	S51	2.28
	4700	22	35	S24	2.36
	4700	22	40	S25	2.47

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
50	4700	22	45	S26	2.56
	4700	25	30	S33	2.39
	4700	25	35	S34	2.50
	4700	30	25	S42	2.44
	4700	30	30	S43	2.58
	4700	35	20	S51	2.51
	4700	35	25	S52	2.67
	5600	22	40	S25	2.70
	5600	22	45	S26	2.79
	5600	22	50	S27	2.89
	5600	25	35	S34	2.73
	5600	25	40	S35	2.81
	5600	30	25	S42	2.66
	5600	30	30	S43	2.82
	5600	30	35	S44	2.95
	5600	35	25	S52	2.91
	6800	22	45	S26	3.08
	6800	22	50	S27	3.18
	6800	25	40	S35	3.10
	6800	25	45	S36	3.24
	6800	25	50	S37	3.37
	6800	30	30	S43	3.10
	6800	30	35	S44	3.25
	6800	30	40	S45	3.39
	6800	35	25	S52	3.21
	6800	35	30	S53	3.31
	8200	22	50	S27	3.50
	8200	25	40	S35	3.40
	8200	25	45	S36	3.56
	8200	30	35	S44	3.57
	8200	30	40	S45	3.72
	8200	30	45	S46	3.89
	8200	35	30	S53	3.63
	8200	35	35	S54	3.66
	10000	25	45	S36	3.93
	10000	25	50	S37	4.09
	10000	30	40	S45	3.90
	10000	30	45	S46	4.00
	10000	30	50	S47	4.27
	10000	35	30	S53	4.01
	10000	35	35	S54	4.05
	10000	35	40	S55	4.07
	12000	30	45	S46	4.30
	12000	30	50	S47	4.68
	12000	35	35	S54	4.43
	12000	35	40	S55	4.46
	12000	35	45	S56	4.50
	15000	30	50	S47	4.95
	15000	35	40	S55	4.98
	15000	35	45	S56	5.03
	18000	35	45	S56	5.51
	18000	35	50	S57	5.73
	22000	35	50	S57	6.33

(Note) Rated ripple current : 105℃ , 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
63	820	22	20	S21	0.96
	1000	22	20	S21	1.06
	1200	22	20	S21	1.11
	1200	22	25	S22	1.25
	1200	25	20	S31	1.16
	1500	22	25	S22	1.40
	1500	25	20	S31	1.29
	1800	22	25	S22	1.46
	1800	22	30	S23	1.60
	1800	25	20	S31	1.42
	1800	25	25	S32	1.52
	1800	30	20	S41	1.47
	2200	22	30	S23	1.68
	2200	22	35	S24	1.73
	2200	25	25	S32	1.68
	2200	25	30	S33	1.75
	2200	30	20	S41	1.63
	2200	35	20	S51	1.85
	2700	22	30	S23	1.86
	2700	22	35	S24	1.92
	2700	25	25	S32	1.86
	2700	25	30	S33	1.94
	2700	25	35	S34	1.99
	2700	30	20	S41	1.81
	2700	30	25	S42	1.93
	2700	35	20	S51	2.05
	3300	22	35	S24	2.12
	3300	22	40	S25	2.18
	3300	22	50	S27	2.32
	3300	25	30	S33	2.14
	3300	25	35	S34	2.20
	3300	25	40	S35	2.27
	3300	30	25	S42	2.13
	3300	30	30	S43	2.24
	3300	35	20	S51	2.26
	3300	35	25	S52	2.41
	3900	22	40	S25	2.37
	3900	22	45	S26	2.42
	3900	25	35	S34	2.39
	3900	25	40	S35	2.47
	3900	25	45	S36	2.54
	3900	30	25	S42	2.32
	3900	30	30	S43	2.44
	3900	30	35	S44	2.55
	3900	35	25	S52	2.62
	4700	22	45	S26	2.65
	4700	22	50	S27	2.77
	4700	25	40	S35	2.71
	4700	25	45	S36	2.79
	4700	25	50	S37	2.88
	4700	30	30	S43	2.67
	4700	30	35	S44	2.80
	4700	30	40	S45	2.90
	4700	35	25	S52	2.72

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
63	4700	35	30	S53	2.83
	5600	25	45	S36	3.04
	5600	25	50	S37	3.14
	5600	30	35	S44	3.06
	5600	30	40	S45	3.17
	5600	30	45	S46	3.28
	5600	35	30	S53	3.09
	5600	35	35	S54	3.24
	6800	25	50	S37	3.46
	6800	30	40	S45	3.49
	6800	30	45	S46	3.61
	6800	30	50	S47	3.73
	6800	35	30	S53	3.40
	6800	35	35	S54	3.57
	6800	35	40	S55	3.71
	8200	30	45	S46	3.97
	8200	30	50	S47	4.10
	8200	35	35	S54	3.92
	8200	35	40	S55	4.07
	8200	35	45	S56	4.16
	10000	30	50	S47	4.52
	10000	35	40	S55	4.50
	10000	35	45	S56	4.59
	10000	35	50	S57	4.69
	12000	35	45	S56	5.03
	12000	35	50	S57	5.14
	15000	35	50	S57	5.74
80	560	22	20	S21	0.85
	680	22	20	S21	0.94
	820	22	20	S21	1.03
	820	22	25	S22	1.11
	820	25	20	S31	1.07
	1000	22	25	S22	1.23
	1000	25	20	S31	1.18
	1200	22	25	S22	1.34
	1200	22	30	S23	1.39
	1200	25	20	S31	1.29
	1200	25	25	S32	1.39
	1200	30	20	S41	1.38
	1500	22	30	S23	1.55
	1500	22	35	S24	1.61
	1500	25	25	S32	1.55
	1500	25	30	S33	1.62
	1500	30	20	S41	1.55
	1500	35	20	S51	1.68
	1800	22	30	S23	1.70
	1800	22	35	S24	1.76
	1800	22	40	S25	1.83
	1800	25	25	S32	1.70
	1800	25	30	S33	1.77
	1800	30	20	S41	1.69
	1800	30	25	S42	1.81
	1800	35	20	S51	1.84
	2200	22	35	S24	1.95

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
80	2200	22	40	S25	2.02
	2200	22	45	S26	2.09
	2200	25	30	S33	1.96
	2200	25	35	S34	2.01
	2200	30	25	S42	2.00
	2200	30	30	S43	2.10
	2200	35	20	S51	2.04
	2200	35	25	S52	2.17
	2700	22	40	S25	2.24
	2700	22	45	S26	2.32
	2700	25	35	S34	2.23
	2700	25	40	S35	2.32
	2700	25	45	S36	2.43
	2700	30	25	S42	2.22
	2700	30	30	S43	2.33
	2700	30	35	S44	2.43
	2700	35	25	S52	2.40
	3300	22	45	S26	2.56
	3300	22	50	S27	2.67
	3300	25	35	S34	2.46
	3300	25	40	S35	2.57
	3300	25	50	S37	2.76
	3300	30	30	S43	2.57
	3300	30	35	S44	2.69
	3300	30	40	S45	2.78
	3300	35	25	S52	2.66
	3300	35	30	S53	2.71
	3900	22	50	S27	2.90
	3900	25	40	S35	2.79
	3900	25	45	S36	2.92
	3900	30	35	S44	2.92
	3900	30	40	S45	3.02
	3900	30	45	S46	3.12
	3900	35	30	S53	2.95
	3900	35	35	S54	3.07
	4700	25	50	S37	3.29
	4700	30	40	S45	3.32
	4700	30	45	S46	3.43
	4700	30	50	S47	3.56
	4700	35	30	S53	3.23
	4700	35	35	S54	3.37
	4700	35	40	S55	3.50
	5600	30	45	S46	3.74
	5600	30	50	S47	3.89
	5600	35	35	S54	3.68
	5600	35	40	S55	3.82
	5600	35	45	S56	3.87
	6800	30	50	S47	4.03
	6800	35	40	S55	3.93
	6800	35	45	S56	4.03
	6800	35	50	S57	4.19
	8200	35	45	S56	4.32
	8200	35	50	S57	4.60
	10000	35	50	S57	5.08

(Note) Rated ripple current : 105℃ , 120Hz

• The standard ratings follow the next page.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications
from ELNA to ensure that the component is suitable for your use.

LAZ, LTZ LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
100	390	22	20	S21	0.83
	470	22	20	S21	0.91
	560	22	20	S21	0.99
	560	22	25	S22	1.07
	560	25	20	S31	1.04
	680	22	25	S22	1.18
	680	25	20	S31	1.14
	820	22	25	S22	1.29
	820	22	30	S23	1.35
	820	25	20	S31	1.26
	820	25	25	S32	1.35
	820	30	20	S41	1.32
	1000	22	30	S23	1.49
	1000	22	35	S24	1.54
	1000	25	25	S32	1.49
	1000	25	30	S33	1.56
	1000	30	20	S41	1.46
	1000	35	20	S51	1.59
	1200	22	30	S23	1.63
	1200	22	35	S24	1.69
	1200	22	40	S25	1.74
	1200	25	25	S32	1.63
	1200	25	30	S33	1.71
	1200	25	35	S34	1.76
	1200	30	20	S41	1.60
	1200	30	25	S42	1.71
	1200	35	20	S51	1.74
	1500	22	35	S24	1.89
	1500	22	40	S25	1.95
	1500	22	45	S26	1.99
	1500	25	30	S33	1.91
	1500	25	35	S34	1.97
	1500	25	40	S35	2.03
	1500	30	25	S42	1.91
	1500	30	30	S43	2.00
	1500	35	20	S51	1.94
	1500	35	25	S52	2.07
	1800	22	40	S25	2.13
	1800	22	45	S26	2.18
	1800	25	35	S34	2.16
	1800	25	40	S35	2.22

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
100	1800	25	45	S36	2.28
	1800	30	25	S42	2.09
	1800	30	30	S43	2.19
	1800	30	35	S44	2.27
	1800	35	25	S52	2.27
	2200	22	45	S26	2.41
	2200	22	50	S27	2.52
	2200	25	40	S35	2.46
	2200	25	45	S36	2.52
	2200	25	50	S37	2.57
	2200	30	30	S43	2.42
	2200	30	35	S44	2.51
	2200	30	40	S45	2.59
	2200	35	25	S52	2.51
	2200	35	30	S53	2.56
	2700	25	45	S36	2.79
	2700	25	50	S37	2.85
	2700	30	35	S44	2.78
	2700	30	40	S45	2.87
	2700	30	45	S46	2.94
	2700	35	30	S53	2.79
	2700	35	35	S54	2.90
	3300	25	50	S37	3.15
	3300	30	40	S45	3.17
	3300	30	45	S46	3.25
	3300	30	50	S47	3.32
	3300	35	30	S53	3.09
	3300	35	35	S54	3.21
	3300	35	40	S55	3.31
	3900	30	45	S46	3.53
	3900	30	50	S47	3.61
	3900	35	35	S54	3.49
	3900	35	40	S55	3.60
	3900	35	45	S56	3.69
	4700	30	50	S47	3.96
	4700	35	40	S55	3.95
	4700	35	45	S56	4.05
	4700	35	50	S57	4.14
	5600	35	45	S56	4.42
	5600	35	50	S57	4.52
	6800	35	50	S57	4.98

(Note) Rated ripple current : 105℃ , 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
160	180	22	20	S21	0.82
	220	22	20	S21	0.90
	220	25	20	S31	1.02
	270	22	20	S21	1.00
	270	25	20	S31	1.13
	330	22	20	S21	1.10
	330	22	25	S22	1.24
	330	25	20	S31	1.25
	390	22	25	S22	1.35
	390	22	30	S23	1.41
	390	25	20	S31	1.36
	390	25	25	S32	1.45
	390	30	20	S41	1.37
	470	22	25	S22	1.48
	470	22	30	S23	1.50
	470	22	35	S24	1.58
	470	25	25	S32	1.53
	470	30	20	S41	1.50
	560	22	30	S23	1.68
	560	22	35	S24	1.75
	560	25	25	S32	1.63
	560	25	30	S33	1.73
	560	30	20	S41	1.63
	560	35	20	S51	1.82
	680	22	35	S24	1.93
	680	22	40	S25	1.98
	680	25	30	S33	1.91
	680	25	35	S34	1.98
	680	30	20	S41	1.80
	680	30	25	S42	1.85
	680	35	20	S51	2.01
	820	22	35	S24	2.08
	820	22	40	S25	2.17
	820	22	50	S27	2.35
	820	25	30	S33	2.09
	820	25	35	S34	2.17
	820	25	40	S35	2.35
	820	30	25	S42	2.03
	820	30	30	S43	2.35
	820	35	20	S51	2.20
	820	35	25	S52	2.35
	1000	22	45	S26	2.42
	1000	25	35	S34	2.40
	1000	25	40	S35	2.47
	1000	25	45	S36	2.65
	1000	30	30	S43	2.45
	1000	30	35	S44	2.52
	1000	35	25	S52	2.60
	1000	35	30	S53	2.75
	1200	22	50	S27	2.84
	1200	25	40	S35	2.84
	1200	25	45	S36	2.90
	1200	25	50	S37	3.02
	1200	30	30	S43	2.84
	1200	30	35	S44	2.96
	1200	30	40	S45	3.10

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
160	1200	35	25	S52	2.69
	1200	35	30	S53	2.95
	1500	22	60	S29	3.41
	1500	25	45	S36	3.25
	1500	25	50	S37	3.38
	1500	30	35	S44	3.10
	1500	30	40	S45	3.21
	1500	30	45	S46	3.57
	1500	35	30	S53	3.06
	1500	35	35	S54	3.21
	1800	25	55	S38	3.84
	1800	30	40	S45	3.52
	1800	30	45	S46	3.91
	1800	30	50	S47	4.07
	1800	35	30	S53	3.35
	1800	35	35	S54	3.52
	1800	35	40	S55	3.94
	1800	35	45	S56	4.15
	2200	30	45	S46	4.03
	2200	30	50	S47	4.16
	2200	35	35	S54	3.89
	2200	35	40	S55	4.36
	2200	35	45	S56	4.59
	2200	35	50	S57	4.87
	2700	30	55	S48	4.76
	2700	35	50	S57	5.03
	3300	35	50	S57	5.47
	3900	35	60	S59	6.39
180	180	22	20	S21	0.82
	220	22	20	S21	0.91
	220	25	20	S31	1.03
	270	22	20	S21	1.00
	270	22	25	S22	1.13
	270	25	20	S31	1.14
	330	22	25	S22	1.25
	330	22	30	S23	1.30
	330	25	20	S31	1.20
	330	30	20	S41	1.26
	390	22	25	S22	1.35
	390	22	30	S23	1.41
	390	25	20	S31	1.29
	390	25	25	S32	1.42
	390	30	20	S41	1.37
	470	22	30	S23	1.55
	470	22	35	S24	1.58
	470	25	25	S32	1.56
	470	25	30	S33	1.62
	470	30	20	S41	1.50
	470	35	20	S51	1.52
	560	22	30	S23	1.69
	560	22	35	S24	1.73
	560	22	40	S25	1.79
	560	25	25	S32	1.67
	560	25	30	S33	1.74
	560	25	35	S34	1.77
	560	30	20	S41	1.64

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
180	560	30	25	S42	1.69
	560	35	20	S51	1.66
	680	22	35	S24	1.90
	680	22	40	S25	1.97
	680	22	45	S26	2.01
	680	22	50	S27	2.06
	680	25	30	S33	1.91
	680	25	35	S34	1.95
	680	25	40	S35	2.01
	680	30	25	S42	1.86
	680	30	30	S43	1.97
	680	35	20	S51	1.83
	680	35	25	S52	1.92
	820	22	40	S25	2.17
	820	22	45	S26	2.21
	820	25	35	S34	2.14
	820	25	40	S35	2.20
	820	25	45	S36	2.26
	820	30	25	S42	2.04
	820	30	30	S43	2.17
	820	30	35	S44	2.20
	820	35	20	S51	2.01
	820	35	25	S52	2.11
	1000	22	45	S26	2.44
	1000	22	50	S27	2.50
	1000	25	40	S35	2.43
	1000	25	45	S36	2.49
	1000	25	50	S37	2.66
	1000	30	30	S43	2.39
	1000	30	35	S44	2.43
	1000	30	40	S45	2.46
	1000	35	25	S52	2.33
	1000	35	30	S53	2.42
	1200	22	55	S28	2.85
	1200	25	45	S36	2.73
	1200	30	35	S44	2.66
	1200	30	40	S45	2.69
	1200	30	45	S46	2.79
	1200	35	25	S52	2.55
	1200	35	30	S53	2.65
	1200	35	35	S54	2.70
	1500	25	50	S37	3.12
	1500	30	40	S45	3.01
	1500	30	45	S46	3.12
	1500	30	50	S47	3.23
	1500	35	30	S53	2.96
	1500	35	35	S54	3.02
	1500	35	40	S55	3.08
	1800	25	60	S39	3.83
	1800	30	45	S46	3.42
	1800	35	35	S54	3.31
	1800	35	40	S55	3.37
	1800	35	45	S56	3.47
	2200	30	50	S47	3.83
	2200	35	40	S55	3.73
	2200	35	45	S56	3.84

(Note) Rated ripple current : 105℃ , 120Hz

• The standard ratings follow the next page.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications
from ELNA to ensure that the component is suitable for your use.

LAZ, LTZ LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
180	2200	35	50	S57	3.87
	2700	30	60	S49	4.64
	2700	35	45	S56	4.25
	2700	35	50	S57	4.29
	3300	35	55	S58	4.92
200	150	22	20	S21	0.76
	180	22	20	S21	0.82
	220	22	20	S21	0.91
	220	25	20	S31	1.03
	270	22	20	S21	1.00
	270	22	25	S22	1.17
	270	25	20	S31	1.09
	270	30	20	S41	1.14
	330	22	25	S22	1.29
	330	22	30	S23	1.30
	330	25	20	S31	1.18
	330	25	25	S32	1.30
	390	22	25	S22	1.35
	390	22	30	S23	1.40
	390	25	25	S32	1.37
	390	30	20	S41	1.37
	470	22	30	S23	1.53
	470	22	35	S24	1.61
	470	22	40	S25	1.75
	470	25	25	S32	1.50
	470	25	30	S33	1.56
	470	30	20	S41	1.50
	470	30	25	S42	1.60
	470	35	20	S51	1.67
	560	22	35	S24	1.73
	560	22	45	S26	1.82
	560	25	30	S33	1.70
	560	25	35	S34	1.77
	560	30	25	S42	1.75
	560	35	20	S51	1.82
	680	22	40	S25	1.97
	680	22	50	S27	2.06
	680	25	30	S33	1.87
	680	25	35	S34	1.95
	680	25	40	S35	2.01
	680	30	25	S42	1.92
	680	30	30	S43	1.97
	680	35	20	S51	1.92
	680	35	25	S52	1.96
	820	22	45	S26	2.21
	820	25	35	S34	2.14
	820	25	40	S35	2.20
	820	25	45	S36	2.26
	820	25	50	S37	2.41
	820	30	25	S42	2.04
	820	30	30	S43	2.17
	820	30	35	S44	2.18
	820	35	25	S52	2.07
	820	35	30	S53	2.18
	1000	22	50	S27	2.50
	1000	25	40	S35	2.43

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
200	1000	25	45	S36	2.49
	1000	25	50	S37	2.57
	1000	30	30	S43	2.39
	1000	30	35	S44	2.40
	1000	30	40	S45	2.46
	1000	30	45	S46	2.55
	1000	35	25	S52	2.29
	1000	35	30	S53	2.40
	1200	22	60	S29	2.93
	1200	25	50	S37	2.82
	1200	30	35	S44	2.63
	1200	30	40	S45	2.69
	1200	30	45	S46	2.79
	1200	30	50	S47	2.89
	1200	35	30	S53	2.63
	1200	35	35	S54	2.65
	1200	35	40	S55	2.76
	1500	25	60	S39	3.49
	1500	30	40	S45	3.01
	1500	30	45	S46	3.12
	1500	30	50	S47	3.23
	1500	35	35	S54	2.97
	1500	35	40	S55	3.45
	1500	35	45	S56	3.65
	1800	30	50	S47	3.54
	1800	35	40	S55	3.59
	1800	35	45	S56	4.00
	1800	35	50	S57	4.16
	2200	30	60	S49	4.19
	2200	35	45	S56	4.13
	2200	35	50	S57	4.60
	2700	35	50	S57	5.09
	3300	35	60	S59	6.03
250	120	22	20	S21	0.67
	150	22	20	S21	0.75
	150	25	20	S31	0.92
	180	22	20	S21	0.82
	180	22	25	S22	1.00
	180	25	20	S31	1.01
	220	22	25	S22	1.11
	220	22	30	S23	1.20
	220	25	20	S31	1.02
	220	25	25	S32	1.12
	220	30	20	S41	1.03
	270	22	25	S22	1.13
	270	22	30	S23	1.25
	270	22	35	S24	1.37
	270	25	25	S32	1.15
	270	30	20	S41	1.14
	330	22	30	S23	1.30
	330	22	35	S24	1.50
	330	22	40	S25	1.54
	330	25	25	S32	1.27
	330	25	30	S33	1.33
	330	30	20	S41	1.26
	330	30	25	S42	1.35

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
250	330	35	20	S51	1.30
	390	22	30	S23	1.38
	390	22	35	S24	1.52
	390	22	40	S25	1.57
	390	22	45	S26	1.60
	390	25	25	S32	1.38
	390	25	30	S33	1.41
	390	25	35	S34	1.61
	390	30	20	S41	1.37
	390	30	25	S42	1.47
	390	35	20	S51	1.41
	470	22	35	S24	1.58
	470	22	40	S25	1.64
	470	22	50	S27	1.72
	470	25	30	S33	1.61
	470	25	35	S34	1.63
	470	25	40	S35	1.73
	470	30	25	S42	1.61
	470	30	30	S43	1.65
	470	35	20	S51	1.55
	470	35	25	S52	1.65
	560	22	40	S25	1.79
	560	22	45	S26	1.82
	560	25	35	S34	1.77
	560	25	40	S35	1.82
	560	25	45	S36	1.87
	560	30	25	S42	1.69
	560	30	30	S43	1.80
	560	30	35	S44	1.85
	560	35	25	S52	1.80
	560	35	30	S53	1.85
	680	22	45	S26	2.01
	680	22	50	S27	2.06
	680	25	40	S35	2.01
	680	25	45	S36	2.06
	680	25	50	S37	2.20
	680	30	30	S43	1.98
	680	30	35	S44	2.04
	680	30	40	S45	2.20
	680	35	25	S52	1.98
	680	35	30	S53	2.04
	820	22	55	S28	2.34
	820	25	45	S36	2.26
	820	25	50	S37	2.42
	820	30	35	S44	2.24
	820	30	40	S45	2.42
	820	30	45	S46	2.50
	820	35	30	S53	2.24
	820	35	35	S54	2.35
	1000	25	50	S37	2.57
	1000	30	40	S45	2.67
	1000	30	45	S46	2.69
	1000	30	50	S47	2.71
	1000	35	30	S53	2.47
	1000	35	35	S54	2.60
	1000	35	40	S55	2.90

(Note) Rated ripple current : 105℃ , 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
250	1200	30	45	S46	2.79
	1200	30	50	S47	2.89
	1200	35	35	S54	2.85
	1200	35	40	S55	3.18
	1200	35	45	S56	3.30
	1500	30	55	S48	3.35
	1500	35	40	S55	3.28
	1500	35	45	S56	3.69
	1500	35	50	S57	3.80
	1800	35	50	S57	4.16
	2200	35	60	S59	4.93
350	82	22	20	S21	0.55
	100	22	20	S21	0.61
	100	22	25	S22	0.69
	100	25	20	S31	0.69
	120	22	20	S21	0.67
	120	22	25	S22	0.75
	120	25	20	S31	0.72
	150	22	25	S22	0.84
	150	22	30	S23	0.88
	150	25	20	S31	0.79
	150	25	25	S32	0.88
	150	30	20	S41	0.85
	180	22	30	S23	0.96
	180	22	35	S24	0.98
	180	25	25	S32	0.97
	180	25	30	S33	0.99
	180	30	20	S41	0.93
	180	35	20	S51	0.94
	220	22	30	S23	1.06
	220	22	35	S24	1.08
	220	25	25	S32	1.07
	220	25	30	S33	1.09
	220	30	20	S41	1.03
	220	30	25	S42	1.06
	220	35	20	S51	1.04
	270	22	35	S24	1.20
	270	22	40	S25	1.24
	270	25	30	S33	1.21
	270	25	35	S34	1.23
	270	30	25	S42	1.17
	270	30	30	S43	1.24
	270	35	20	S51	1.15
	270	35	25	S52	1.19
	330	22	40	S25	1.37
	330	22	45	S26	1.40
	330	25	35	S34	1.36
	330	25	40	S35	1.40
	330	30	25	S42	1.29
	330	30	30	S43	1.37
	330	35	25	S52	1.31
	390	22	50	S27	1.56
	390	25	40	S35	1.52
	390	25	45	S36	1.56
	390	30	30	S43	1.49
	390	30	35	S44	1.52

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
350	390	35	25	S52	1.43
	390	35	30	S53	1.51
	470	22	55	S28	1.78
	470	25	45	S36	1.71
	470	25	50	S37	1.83
	470	30	35	S44	1.67
	470	30	40	S45	1.69
	470	35	30	S53	1.66
	470	35	35	S54	1.69
	560	25	50	S37	1.90
	560	30	40	S45	1.84
	560	35	30	S53	1.81
	560	35	35	S54	1.85
	680	22	60	S29	2.21
	680	30	45	S46	2.10
	680	30	50	S47	2.18
	680	35	35	S54	2.04
	680	35	40	S55	2.07
	680	35	45	S56	2.14
	820	30	50	S47	2.32
	820	35	40	S55	2.28
	820	35	45	S56	2.34
	1000	30	60	S49	2.72
	1000	35	50	S57	2.61
	1200	35	55	S58	2.96
400	47	22	20	S21	0.48
	56	22	20	S21	0.53
	68	22	20	S21	0.58
	68	22	25	S22	0.65
	68	25	20	S31	0.66
	82	22	20	S21	0.64
	82	22	25	S22	0.71
	82	22	30	S23	0.74
	82	25	20	S31	0.68
	82	25	25	S32	0.75
	100	22	25	S22	0.79
	100	22	30	S23	0.82
	100	25	20	S31	0.75
	100	25	25	S32	0.81
	100	30	20	S41	0.80
	120	22	25	S22	0.86
	120	22	30	S23	0.90
	120	22	35	S24	0.92
	120	25	20	S31	0.82
	120	25	25	S32	0.88
	120	25	30	S33	0.91
	120	30	20	S41	0.87
	120	30	25	S42	0.90
	150	22	30	S23	0.99
	150	22	35	S24	1.03
	150	22	40	S25	1.07
	150	25	25	S32	0.99
	150	25	30	S33	1.01
	150	25	35	S34	1.05
	150	30	20	S41	0.98
	150	30	25	S42	1.00

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
400	150	35	20	S51	0.99
	180	22	30	S23	1.10
	180	22	35	S24	1.13
	180	22	45	S26	1.19
	180	25	25	S32	1.09
	180	25	30	S33	1.11
	180	25	35	S34	1.16
	180	25	40	S35	1.19
	180	30	20	S41	1.07
	180	30	25	S42	1.10
	180	30	30	S43	1.17
	180	35	20	S51	1.08
	180	35	25	S52	1.12
	220	22	35	S24	1.25
	220	22	40	S25	1.29
	220	22	50	S27	1.35
	220	25	30	S33	1.23
	220	25	35	S34	1.28
	220	25	40	S35	1.31
	220	25	45	S36	1.35
	220	30	25	S42	1.22
	220	30	30	S43	1.25
	220	30	35	S44	1.31
	220	35	20	S51	1.20
	220	35	25	S52	1.23
	270	22	40	S25	1.43
	270	22	45	S26	1.46
	270	25	35	S34	1.42
	270	25	40	S35	1.45
	270	25	45	S36	1.49
	270	25	50	S37	1.60
	270	30	25	S42	1.35
	270	30	30	S43	1.39
	270	30	35	S44	1.45
	270	30	40	S45	1.47
	270	35	25	S52	1.37
	270	35	30	S53	1.41
	330	22	50	S27	1.65
	330	25	40	S35	1.61
	330	25	45	S36	1.65
	330	25	50	S37	1.70
	330	30	30	S43	1.53
	330	30	35	S44	1.61
	330	30	40	S45	1.62
	330	30	45	S46	1.68
	330	35	25	S52	1.51
	330	35	30	S53	1.56
	330	35	35	S54	1.62
	390	22	60	S29	1.92
	390	25	45	S36	1.79
	390	25	50	S37	1.85
	390	30	35	S44	1.75
	390	30	40	S45	1.77
	390	30	45	S46	1.83
	390	30	50	S47	1.90
	390	35	30	S53	1.69

(Note) Rated ripple current : 105℃ , 120Hz

• The standard ratings follow the next page.

LAZ, LTZ LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
400	390	35	35	S54	1.76
	390	35	40	S55	1.81
	470	25	55	S38	2.18
	470	30	40	S45	1.94
	470	30	45	S46	2.01
	470	30	50	S47	2.05
	470	35	35	S54	1.93
	470	35	40	S55	1.98
	470	35	45	S56	2.04
	560	30	45	S46	2.19
	560	30	50	S47	2.27
	560	35	35	S54	2.11
	560	35	40	S55	2.16
	560	35	45	S56	2.30
	560	35	50	S57	2.48
	680	30	55	S48	2.59
	680	35	40	S55	2.39
	680	35	45	S56	2.53
	820	35	50	S57	3.00
	1000	35	55	S58	3.43
450	56	22	20	S21	0.53
	56	22	25	S22	0.59
	68	22	20	S21	0.58
	68	22	25	S22	0.65
	68	22	30	S23	0.68
	68	25	20	S31	0.66
	68	25	25	S32	0.68
	82	22	25	S22	0.71
	82	22	30	S23	0.74
	82	22	35	S24	0.76
	82	25	20	S31	0.68
	82	25	25	S32	0.73
	100	22	25	S22	0.79
	100	22	30	S23	0.82
	100	22	35	S24	0.84
	100	22	40	S25	0.87
	100	25	25	S32	0.81
	100	25	30	S33	0.86
	100	30	20	S41	0.80

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
450	100	30	25	S42	0.82
	120	22	30	S23	0.90
	120	22	35	S24	0.92
	120	22	40	S25	0.95
	120	22	45	S26	0.97
	120	25	25	S32	0.88
	120	25	30	S33	0.93
	120	25	35	S34	0.95
	120	30	20	S41	0.87
	120	30	25	S42	0.90
	120	35	20	S51	0.89
	150	22	35	S24	1.03
	150	22	45	S26	1.09
	150	22	50	S27	1.12
	150	25	30	S33	1.03
	150	25	35	S34	1.05
	150	25	40	S35	1.07
	150	30	25	S42	1.00
	150	30	30	S43	1.05
	150	35	20	S51	0.99
	150	35	25	S52	1.02
	180	22	40	S25	1.17
	180	22	50	S27	1.22
	180	25	30	S33	1.13
	180	25	35	S34	1.16
	180	25	40	S35	1.19
	180	25	45	S36	1.24
	180	30	25	S42	1.10
	180	30	30	S43	1.14
	180	30	35	S44	1.19
	180	35	20	S51	1.08
	180	35	25	S52	1.12
	220	22	45	S26	1.32
	220	25	35	S34	1.28
	220	25	40	S35	1.31
	220	25	45	S36	1.35
	220	25	50	S37	1.46
	220	30	25	S42	1.22
	220	30	30	S43	1.27

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
450	220	30	35	S44	1.31
	220	30	40	S45	1.33
	220	35	25	S52	1.23
	220	35	30	S53	1.29
	270	22	50	S27	1.50
	270	25	40	S35	1.45
	270	25	45	S36	1.49
	270	30	30	S43	1.43
	270	30	35	S44	1.45
	270	30	40	S45	1.47
	270	30	45	S46	1.52
	270	35	25	S52	1.37
	270	35	30	S53	1.44
	270	35	35	S54	1.46
	330	25	50	S37	1.76
	330	30	35	S44	1.61
	330	30	40	S45	1.62
	330	30	50	S47	1.90
	330	35	30	S53	1.60
	330	35	35	S54	1.62
	390	25	55	S38	1.98
	390	30	40	S45	1.77
	390	30	45	S46	1.83
	390	35	35	S54	1.76
	390	35	40	S55	2.00
	470	30	45	S46	2.01
	470	30	50	S47	2.13
	470	35	35	S54	1.93
	470	35	40	S55	2.20
	470	35	45	S56	2.27
	560	30	45	S46	2.19
	560	30	50	S47	2.27
	560	35	35	S54	2.11
	560	35	40	S55	2.40
	560	35	45	S56	2.48
	680	35	50	S57	2.61
	820	35	60	S59	3.07

(Note) Rated ripple current : 105℃ , 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
500	39	22	20	S21	0.44
	47	22	20	S21	0.48
	47	25	20	S31	0.55
	56	22	20	S21	0.53
	56	22	25	S22	0.59
	56	25	20	S31	0.57
	68	22	25	S22	0.65
	68	22	30	S23	0.68
	68	25	20	S31	0.62
	68	25	25	S32	0.68
	68	30	20	S41	0.66
	82	22	25	S22	0.71
	82	22	30	S23	0.74
	82	25	25	S32	0.73
	82	25	30	S33	0.77
	82	30	20	S41	0.72
	100	22	30	S23	0.82
	100	22	35	S24	0.84
	100	25	25	S32	0.81
	100	25	30	S33	0.85
	100	30	20	S41	0.80
	100	30	25	S42	0.82
	100	35	20	S51	0.81
	120	22	35	S24	0.92
	120	22	40	S25	0.95
	120	25	30	S33	0.92
	120	25	35	S34	0.95
	120	30	25	S42	0.90
	120	30	30	S43	0.93
	120	35	20	S51	0.89
	150	22	40	S25	1.07
	150	22	45	S26	1.09
	150	25	35	S34	1.05
	150	25	40	S35	1.08
	150	30	25	S42	1.00
	150	30	30	S43	1.02
500	150	35	20	S51	0.99
	150	35	25	S52	1.02
	180	22	45	S26	1.19
	180	22	50	S27	1.22
	180	25	40	S35	1.19
	180	25	45	S36	1.22
	180	30	30	S43	1.14
	180	30	35	S44	1.16
	180	35	25	S52	1.12
	180	35	30	S53	1.15
	220	22	55	S28	1.40
	220	25	45	S36	1.35
	220	25	50	S37	1.39
	220	30	35	S44	1.31
	220	30	40	S45	1.33
	220	35	25	S52	1.23
	220	35	30	S53	1.27
	270	25	50	S37	1.54
	270	30	40	S45	1.47
	270	30	45	S46	1.52
	270	35	30	S53	1.41
	270	35	35	S54	1.46
	330	25	60	S39	1.88
	330	30	45	S46	1.68
	330	30	50	S47	1.71
	330	35	35	S54	1.62
	330	35	40	S55	1.66
	390	30	50	S47	1.77
	390	35	40	S55	1.81
	390	35	45	S56	1.86
	470	30	60	S49	2.23
	470	35	45	S56	2.04
	470	35	50	S57	2.06
	560	35	50	S57	2.25
	680	35	60	S59	2.66

(Note) Rated ripple current : 105℃ , 120Hz

LAX, LTX LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Ultra Long Life, High-Reliability Capacitors

GREEN CAP | 105℃ 5000hours

- Ultra Long Life, high-reliability capacitors.
- Guarantees 5000 hours at 105°C.
- Best suited to On-Coard-Charger for EV, PHEV.

Long life

LAX ⇦ LAZ

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−25 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	$3\sqrt{CV}$ (after 5 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 160 to 250 — tanδ (max.): 0.15; Rated voltage (V): 350 to 500 — tanδ (max.): 0.20 (20℃,120Hz)
Characteristics at high and low temperature	Percentage of capacitance change (%) −25℃: Within ±30% of the value at 20℃; Impedance ratio (max.) Z−25℃/Z+20℃: 4 (120Hz)
Endurance (105℃) (Applied ripple current)	Test time: 5000 hours; Leakage current: The initial specified value or less; Percentage of capacitance change: Within ±20% of initial value; Tangent of the loss angle: 200% or less of the initial specified value
Shelf life (105℃)	Test time: 1000 hours; Leakage current: The initial specified value or less; Percentage of capacitance change: Within ±15% of initial value; Tangent of the loss angle: 150% or less of the initial specified value; Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit: mm

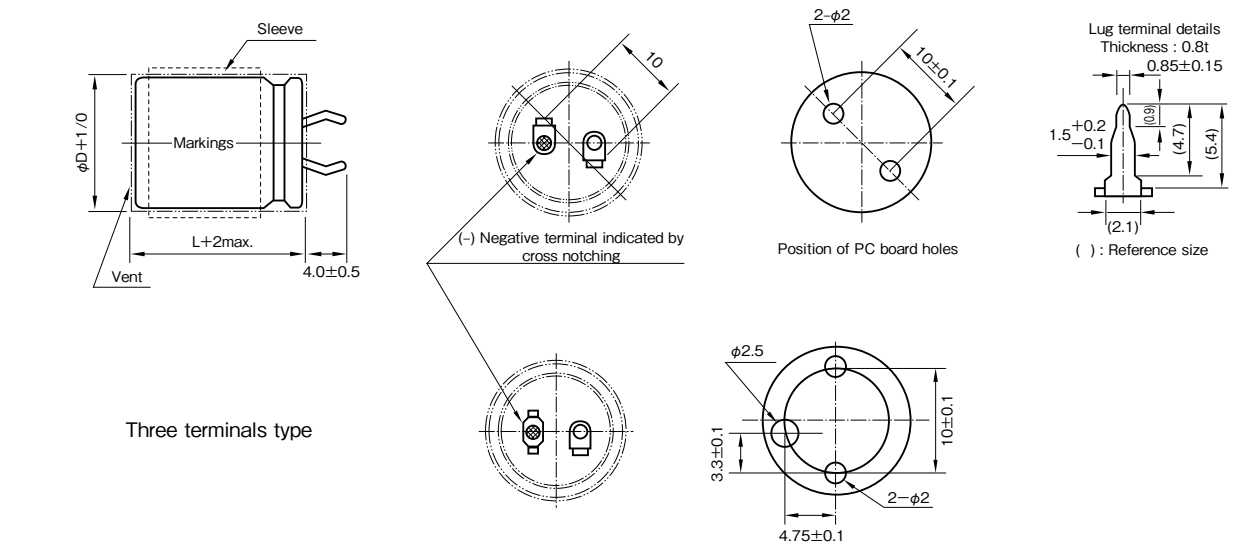

Part numbering system

series LAX, standard terminal type :200V680μF

LAX	—	200	V	681	M	S34	#	B
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol

series LTX, three terminals type :400V330μF

LTX	—	400	V	331	M	S53	#	B
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50	120	1k	10k	30k
160 to 250	0.81	1	1.32	1.45	1.50
350 or more	0.77	1	1.30	1.41	1.43

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
160	220	22	20	S21	0.90
	270	22	20	S21	1.00
	270	22	25	S22	1.12
	270	25	20	S31	1.13
	330	22	25	S22	1.24
	330	22	30	S23	1.29
	330	25	20	S31	1.25
	390	22	25	S22	1.35
	390	22	35	S24	1.43
	390	25	20	S31	1.36
	390	25	25	S32	1.45
	470	22	25	S22	1.48
	470	22	30	S23	1.50
	470	22	40	S25	1.63
	470	25	25	S32	1.53
	470	25	30	S33	1.55
	470	30	20	S41	1.50
	560	22	30	S23	1.68
	560	22	35	S24	1.75
	560	22	45	S26	1.81
	560	25	25	S32	1.63
	560	25	30	S33	1.73
	560	25	35	S34	1.76
	560	30	20	S41	1.63
	560	30	25	S42	1.68
	560	35	20	S51	1.82
	680	22	35	S24	1.93
	680	22	50	S27	2.05
	680	25	30	S33	1.91
	680	25	35	S34	1.98
	680	25	40	S35	2.00
	680	30	25	S42	1.85
	680	30	30	S43	1.96
	680	35	20	S51	2.01
	820	22	40	S25	2.17
	820	25	35	S34	2.17
	820	25	45	S36	2.40
	820	30	25	S42	2.03
	820	30	30	S43	2.35
	820	30	35	S44	2.45
	820	35	20	S51	2.20
	820	35	25	S52	2.35
	820	35	30	S53	2.49
	1000	22	45	S26	2.42
	1000	25	35	S34	2.40
	1000	25	40	S35	2.47
	1000	30	30	S43	2.45
	1000	30	40	S45	2.58

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
160	1000	35	25	S52	2.60
	1000	35	35	S54	2.89
	1200	22	50	S27	2.84
	1200	25	45	S36	2.90
	1200	30	30	S43	2.84
	1200	30	35	S44	2.96
	1200	30	50	S47	3.33
	1200	35	25	S52	2.69
	1200	35	30	S53	2.95
	1500	25	50	S37	3.38
	1500	30	40	S45	3.21
	1500	35	30	S53	3.06
	1500	35	35	S54	3.21
	1500	35	40	S55	3.60
	1800	25	60	S39	3.97
	1800	30	45	S46	3.91
	1800	35	35	S54	3.52
	1800	35	50	S57	4.31
	2200	30	50	S47	4.16
	2200	35	40	S55	4.36
	2700	30	60	S49	4.92
	2700	35	50	S57	5.03
	3300	35	55	S58	5.68
	3900	35	60	S59	6.39
180	180	22	20	S21	0.82
	220	22	20	S21	0.91
	270	22	20	S21	1.00
	270	22	25	S22	1.13
	270	25	20	S31	1.14
	330	22	25	S22	1.25
	330	25	20	S31	1.20
	390	22	25	S22	1.35
	390	22	30	S23	1.41
	390	25	20	S31	1.29
	390	25	25	S32	1.42
	390	30	20	S41	1.37
	470	22	30	S23	1.55
	470	22	35	S24	1.58
	470	25	25	S32	1.56
	470	25	30	S33	1.62
	470	30	20	S41	1.50
	560	22	30	S23	1.69
	560	22	35	S24	1.73
	560	25	25	S32	1.67
	560	25	30	S33	1.74
	560	30	20	S41	1.64
	560	30	25	S42	1.69
	560	35	20	S51	1.66

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
180	680	22	35	S24	1.90
	680	22	40	S25	1.97
	680	25	30	S33	1.91
	680	25	35	S34	1.95
	680	30	25	S42	1.86
	680	30	30	S43	1.97
	680	35	20	S51	1.83
	820	22	40	S25	2.17
	820	22	45	S26	2.21
	820	25	35	S34	2.14
	820	25	40	S35	2.20
	820	30	25	S42	2.04
	820	30	30	S43	2.17
	820	35	20	S51	2.01
	820	35	25	S52	2.11
	1000	22	45	S26	2.44
	1000	22	50	S27	2.50
	1000	25	40	S35	2.43
	1000	25	45	S36	2.49
	1000	30	30	S43	2.39
	1000	30	35	S44	2.43
	1000	35	25	S52	2.33
	1000	35	30	S53	2.42
	1200	22	55	S28	2.85
	1200	25	45	S36	2.73
	1200	25	50	S37	2.92
	1200	30	35	S44	2.66
	1200	30	40	S45	2.69
	1200	35	25	S52	2.55
	1200	35	30	S53	2.65
	1500	25	50	S37	3.12
	1500	30	40	S45	3.01
	1500	30	45	S46	3.12
	1500	35	30	S53	2.96
	1500	35	35	S54	3.02
	1800	25	60	S39	3.83
	1800	30	45	S46	3.42
	1800	30	50	S47	3.54
	1800	35	35	S54	3.31
	1800	35	40	S55	3.37
	2200	30	50	S47	3.83
	2200	35	40	S55	3.73
	2200	35	45	S56	3.84
	2700	30	60	S49	4.64
	2700	35	45	S56	4.25
	2700	35	50	S57	4.29
	3300	35	55	S58	4.92

(Note) Rated ripple current : 105℃ , 120Hz

• The standard ratings follow the next page.

LAX, LTX LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS ELNA®

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
200	180	22	20	S21	0.82
	180	22	25	S22	0.92
	220	22	20	S21	0.91
	220	25	20	S31	1.03
	270	22	25	S22	1.17
	270	22	30	S23	1.29
	270	25	20	S31	1.09
	270	25	25	S32	1.18
	330	22	25	S22	1.29
	330	22	30	S23	1.30
	330	22	35	S24	1.48
	330	25	25	S32	1.30
	330	25	30	S33	1.31
	330	30	20	S41	1.26
	390	22	30	S23	1.40
	390	22	40	S25	1.65
	390	25	25	S32	1.37
	390	30	20	S41	1.37
	390	30	25	S42	1.41
	470	22	30	S23	1.53
	470	22	35	S24	1.61
	470	22	45	S26	1.79
	470	25	25	S32	1.50
	470	25	30	S33	1.56
	470	25	35	S34	1.62
	470	30	20	S41	1.50
	470	30	25	S42	1.60
	470	30	30	S43	1.64
	470	35	20	S51	1.67
	560	22	35	S24	1.73
	560	22	40	S25	1.79
	560	25	30	S33	1.70
	560	25	35	S34	1.77
	560	25	40	S35	1.82
	560	30	25	S42	1.75
	560	30	35	S44	1.82
	560	35	20	S51	1.82
	680	22	40	S25	1.97
	680	25	35	S34	1.95
	680	25	50	S37	2.20
	680	30	25	S42	1.92
	680	30	30	S43	1.97
	680	30	40	S45	2.03
	680	35	25	S52	1.96
	680	35	30	S53	2.00
	820	22	45	S26	2.21
	820	22	50	S27	2.27
	820	25	40	S35	2.20
	820	30	30	S43	2.17
	820	30	35	S44	2.18
	820	30	45	S46	2.31
	820	35	25	S52	2.07
	820	35	30	S53	2.18
	820	35	35	S54	2.19

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
200	1000	22	55	S28	2.59
	1000	25	45	S36	2.49
	1000	30	35	S44	2.40
	1000	30	50	S47	2.64
	1000	35	30	S53	2.40
	1000	35	40	S55	2.52
	1200	25	55	S38	3.02
	1200	30	40	S45	2.69
	1200	35	30	S53	2.63
	1200	35	35	S54	2.65
	1200	35	45	S56	2.84
	1500	25	60	S39	3.49
	1500	30	45	S46	3.12
	1500	35	35	S54	2.97
	1500	35	40	S55	3.45
	1500	35	50	S57	3.80
	1800	30	50	S47	3.54
	1800	35	40	S55	3.59
	1800	35	45	S56	4.00
	2200	30	60	S49	4.19
	2200	35	45	S56	4.13
	2200	35	50	S57	4.60
	2700	35	55	S58	5.28
	3300	35	60	S59	6.03
250	120	22	20	S21	0.67
	150	22	20	S21	0.75
	150	22	25	S22	0.84
	150	25	20	S31	0.92
	180	22	20	S21	0.82
	180	22	25	S22	1.00
	180	22	30	S23	1.09
	180	25	20	S31	1.01
	180	25	25	S32	1.09
	220	22	25	S22	1.11
	220	22	35	S24	1.24
	220	25	20	S31	1.02
	270	22	25	S22	1.13
	270	22	30	S23	1.25
	270	22	40	S25	1.40
	270	25	25	S32	1.15
	270	25	30	S33	1.28
	270	30	20	S41	1.14
	270	30	25	S42	1.17
	330	22	30	S23	1.30
	330	22	35	S24	1.50
	330	22	45	S26	1.57
	330	25	25	S32	1.27
	330	25	30	S33	1.33
	330	25	35	S34	1.57
	330	30	20	S41	1.26
	330	30	30	S43	1.37
	330	35	20	S51	1.30
	390	22	35	S24	1.52
	390	22	50	S27	1.65

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
250	390	25	30	S33	1.41
	390	25	40	S35	1.65
	390	30	25	S42	1.47
	390	35	20	S51	1.41
	470	22	40	S25	1.64
	470	25	30	S33	1.61
	470	25	35	S34	1.63
	470	25	50	S37	1.83
	470	30	25	S42	1.61
	470	30	30	S43	1.65
	470	30	35	S44	1.67
	470	35	20	S51	1.55
	470	35	25	S52	1.65
	470	35	30	S53	1.66
	560	22	45	S26	1.82
	560	25	35	S34	1.77
	560	25	40	S35	1.82
	560	30	30	S43	1.80
	560	30	40	S45	2.01
	560	35	25	S52	1.80
	560	35	35	S54	1.94
	680	22	50	S27	2.06
	680	25	40	S35	2.01
	680	25	45	S36	2.06
	680	30	30	S43	1.98
	680	30	35	S44	2.04
	680	30	45	S46	2.27
	680	35	25	S52	1.98
	680	35	30	S53	2.04
	680	35	40	S55	2.40
	820	22	60	S29	2.42
	820	25	45	S36	2.26
	820	25	50	S37	2.42
	820	30	35	S44	2.24
	820	30	40	S45	2.42
	820	30	50	S47	2.65
	820	35	30	S53	2.24
	820	35	35	S54	2.35
	1000	25	55	S38	2.66
	1000	30	40	S45	2.67
	1000	30	45	S46	2.69
	1000	35	30	S53	2.47
	1000	35	35	S54	2.60
	1000	35	45	S56	3.01
	1200	30	45	S46	2.79
	1200	30	50	S47	2.89
	1200	35	35	S54	2.85
	1200	35	40	S55	3.18
	1500	30	55	S48	3.35
	1500	35	45	S56	3.69
	1800	35	50	S57	4.16
	2200	35	60	S59	4.93

(Note) Rated ripple current : 105℃ , 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
350	82	22	20	S21	0.55
	100	22	20	S21	0.61
	100	25	20	S31	0.69
	120	22	20	S21	0.67
	120	22	25	S22	0.75
	120	25	20	S31	0.72
	150	22	25	S22	0.84
	150	22	30	S23	0.88
	150	25	20	S31	0.79
	150	25	25	S32	0.88
	150	30	20	S41	0.85
	180	22	25	S22	0.92
	180	22	30	S23	0.96
	180	25	25	S32	0.97
	180	25	30	S33	0.99
	180	30	20	S41	0.93
	180	35	20	S51	0.94
	220	22	30	S23	1.06
	220	22	35	S24	1.08
	220	25	25	S32	1.07
	220	25	30	S33	1.09
	220	30	20	S41	1.03
	220	30	25	S42	1.06
	220	35	20	S51	1.04
	270	22	35	S24	1.20
	270	22	40	S25	1.24
	270	25	30	S33	1.21
	270	25	35	S34	1.23
	270	30	25	S42	1.17
	270	30	30	S43	1.24
	270	35	20	S51	1.15
	270	35	25	S52	1.19
	330	22	40	S25	1.37
	330	22	45	S26	1.40
	330	25	35	S34	1.36
	330	25	40	S35	1.40
	330	30	25	S42	1.29
	330	30	30	S43	1.37
	330	35	25	S52	1.31
	390	22	50	S27	1.56
	390	25	40	S35	1.52
	390	25	45	S36	1.56
	390	30	30	S43	1.49
	390	30	35	S44	1.52
	390	35	25	S52	1.43
	390	35	30	S53	1.51
	470	22	55	S28	1.78
	470	25	45	S36	1.71
350	470	25	50	S37	1.83
	470	30	35	S44	1.67
	470	30	40	S45	1.69
	470	35	30	S53	1.66
	470	35	35	S54	1.69
	560	25	50	S37	1.90
	560	30	40	S45	1.84
	560	35	30	S53	1.81
	560	35	35	S54	1.85
	680	22	60	S29	2.21
	680	30	45	S46	2.10
	680	30	50	S47	2.18
	680	35	35	S54	2.04
	680	35	40	S55	2.07
	820	30	50	S47	2.32
	820	35	40	S55	2.28
	820	35	45	S56	2.34
	1000	30	60	S49	2.72
	1000	35	50	S57	2.61
	1200	35	55	S58	2.96
400	56	22	20	S21	0.53
	56	22	25	S22	0.59
	68	22	20	S21	0.58
	68	22	30	S23	0.68
	82	22	20	S21	0.64
	82	22	25	S22	0.71
	82	22	35	S24	0.76
	82	25	20	S31	0.68
	82	25	25	S32	0.75
	100	22	25	S22	0.79
	100	25	20	S31	0.75
	100	25	30	S33	0.83
	100	30	25	S42	0.82
	120	22	25	S22	0.86
	120	22	30	S23	0.90
	120	22	40	S25	0.95
	120	25	25	S32	0.88
	120	25	35	S34	0.94
	120	30	20	S41	0.87
	150	22	30	S23	0.99
	150	22	35	S24	1.03
	150	22	50	S27	1.11
	150	25	25	S32	0.99
	150	25	30	S33	1.01
	150	25	40	S35	1.08
	150	30	20	S41	0.98
	150	30	30	S43	1.07
	150	35	20	S51	0.99
400	180	22	35	S24	1.13
	180	25	30	S33	1.11
	180	25	45	S36	1.22
	180	30	25	S42	1.10
	180	30	35	S44	1.19
	180	35	20	S51	1.08
	220	22	40	S25	1.29
	220	25	30	S33	1.23
	220	25	35	S34	1.28
	220	25	50	S37	1.44
	220	30	25	S42	1.22
	220	30	30	S43	1.25
	220	30	40	S45	1.33
	220	35	20	S51	1.20
	220	35	25	S52	1.23
	220	35	30	S53	1.27
	270	22	45	S26	1.46
	270	25	35	S34	1.42
	270	25	40	S35	1.45
	270	30	30	S43	1.39
	270	35	25	S52	1.37
	270	35	35	S54	1.46
	330	22	55	S28	1.71
	330	25	40	S35	1.61
	330	25	45	S36	1.65
	330	30	35	S44	1.61
	330	30	50	S47	1.74
	330	35	25	S52	1.51
	330	35	30	S53	1.56
	330	35	40	S55	1.66
	390	25	50	S37	1.85
	390	25	55	S38	1.98
	390	30	40	S45	1.77
	390	35	30	S53	1.69
	390	35	35	S54	1.76
	390	35	45	S56	1.86
	470	25	60	S39	2.25
	470	30	45	S46	2.01
	470	35	35	S54	1.93
	470	35	50	S57	2.06
	560	30	50	S47	2.27
	560	35	40	S55	2.16
	680	30	55	S48	2.59
	680	35	45	S56	2.53
	680	35	50	S57	2.73
	820	35	50	S57	3.00
	1000	35	60	S59	3.55

(Note) Rated ripple current : 105℃ , 120Hz

• The standard ratings follow the next page.

LAX, LTX LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS ELNA®

Standard Ratings

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
450	56	22	20	S21	0.53
	56	25	20	S31	0.60
	68	22	20	S21	0.58
	68	22	25	S22	0.65
	68	22	30	S23	0.68
	68	25	20	S31	0.66
	82	22	25	S22	0.71
	82	22	30	S23	0.74
	82	22	35	S24	0.76
	82	25	20	S31	0.68
	82	25	25	S32	0.73
	82	25	30	S33	0.77
	82	30	20	S41	0.72
	82	30	25	S42	0.74
	100	22	25	S22	0.79
	100	22	30	S23	0.82
	100	22	40	S25	0.87
	100	25	25	S32	0.81
	100	25	35	S34	0.88
	100	30	20	S41	0.80
	120	22	30	S23	0.90
	120	22	35	S24	0.92
	120	22	50	S27	1.00
	120	25	25	S32	0.88
	120	25	30	S33	0.93
	120	25	40	S35	0.97
	120	30	20	S41	0.87
	120	30	25	S42	0.90
	120	30	30	S43	0.95
	120	35	20	S51	0.89
	150	22	35	S24	1.03
	150	22	40	S25	1.05
	150	25	30	S33	1.03
	150	25	35	S34	1.05
	150	25	45	S36	1.11
	150	30	25	S42	1.00
	150	30	30	S43	1.05
	150	30	35	S44	1.08
	150	35	20	S51	0.99
	180	22	40	S25	1.17
	180	22	45	S26	1.19
	180	25	35	S34	1.16
	180	25	50	S37	1.30
	180	30	25	S42	1.10
	180	30	30	S43	1.14
	180	30	40	S45	1.20
	180	35	20	S51	1.08
	180	35	25	S52	1.12
	180	35	30	S53	1.15
	220	22	45	S26	1.32
	220	22	50	S27	1.35
	220	25	35	S34	1.28

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
450	220	25	40	S35	1.31
	220	30	30	S43	1.27
	220	30	35	S44	1.31
	220	30	45	S46	1.37
	220	35	25	S52	1.23
	220	35	30	S53	1.29
	220	35	35	S54	1.32
	270	22	50	S27	1.50
	270	25	40	S35	1.45
	270	25	45	S36	1.49
	270	30	35	S44	1.45
	270	30	40	S45	1.47
	270	30	50	S47	1.58
	270	35	25	S52	1.37
	270	35	30	S53	1.44
	270	35	40	S55	1.50
	330	25	50	S37	1.76
	330	30	40	S45	1.62
	330	30	45	S46	1.68
	330	35	30	S53	1.60
	330	35	35	S54	1.62
	330	35	45	S56	1.71
	390	25	55	S38	1.98
	390	30	40	S45	1.77
	390	30	45	S46	1.83
	390	30	50	S47	2.07
	390	35	35	S54	1.76
	390	35	40	S55	2.00
	390	35	50	S57	2.08
	470	30	50	S47	2.13
	470	35	40	S55	2.20
	470	35	45	S56	2.27
	560	30	55	S48	2.35
	560	35	45	S56	2.48
	560	35	50	S57	2.50
	680	35	50	S57	2.61
	820	35	60	S59	3.07
500	39	22	20	S21	0.44
	47	22	20	S21	0.48
	47	25	20	S31	0.55
	56	22	25	S22	0.59
	56	25	20	S31	0.57
	68	22	25	S22	0.65
	68	22	30	S23	0.68
	68	25	20	S31	0.62
	68	25	25	S32	0.68
	68	30	20	S41	0.66
	82	22	30	S23	0.74
	82	25	25	S32	0.73
	82	25	30	S33	0.77
	82	30	20	S41	0.72
	100	22	30	S23	0.82

Rated voltage (V)	Rated capacitance (μF)	Case (mm) D	Case (mm) L	Casing Symbol	Rated ripple current (Arms)
500	100	22	35	S24	0.84
	100	25	25	S32	0.81
	100	25	30	S33	0.85
	100	30	20	S41	0.80
	100	30	25	S42	0.82
	100	35	20	S51	0.81
	120	22	35	S24	0.92
	120	22	40	S25	0.95
	120	25	30	S33	0.92
	120	25	35	S34	0.95
	120	30	25	S42	0.90
	120	30	30	S43	0.93
	120	35	20	S51	0.89
	150	22	40	S25	1.07
	150	22	45	S26	1.09
	150	25	35	S34	1.05
	150	25	40	S35	1.08
	150	30	25	S42	1.00
	150	30	30	S43	1.02
	150	35	25	S52	1.02
	180	22	45	S26	1.19
	180	22	50	S27	1.22
	180	25	40	S35	1.19
	180	25	45	S36	1.22
	180	30	30	S43	1.14
	180	30	35	S44	1.16
	180	35	25	S52	1.12
	180	35	30	S53	1.15
	220	22	55	S28	1.40
	220	25	45	S36	1.35
	220	25	50	S37	1.39
	220	30	35	S44	1.31
	220	30	40	S45	1.33
	220	35	30	S53	1.27
	270	25	50	S37	1.54
	270	30	40	S45	1.47
	270	30	45	S46	1.52
	270	35	30	S53	1.41
	270	35	35	S54	1.46
	330	25	60	S39	1.88
	330	30	45	S46	1.68
	330	30	50	S47	1.71
	330	35	35	S54	1.62
	330	35	40	S55	1.66
	390	30	50	S47	1.77
	390	35	40	S55	1.81
	390	35	45	S56	1.86
	470	30	60	S49	2.23
	470	35	45	S56	2.04
	470	35	50	S57	2.06
	560	35	55	S58	2.33
	680	35	60	S59	2.66

(Note) Rated ripple current : 105℃ , 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

LJ6,LJ2 LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Large-Capacitance, Long-Life, High-Reliability Capacitors

GREEN CAP | 105℃ 5000hours

- Large-capacitornce, Long-life, High-reliability capacitors.
- Guarantees 5000 hours at 105°C.

Large capacitance

LJ6 ⇦ LAX

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−25~+105
Tolerance at rated capacitance (%)	±20 (20℃, 120Hz)
Leakage current (μA) (max.)	0.02CV or 5mA whichever is larger (after 5 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 200 to 500 tanδ (max.): 0.15 (20℃, 120Hz)
Characteristics at high and low temperature	Percentage of capacitance change (%) −25℃: Within ±30% of the value at 20℃ Impedance ratio (max.) Z−25℃/Z+20℃: 4 (120Hz)
Endurance (105℃) (Applied ripple current)	Test time: 5000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 200% or less of the initial specified value
Shelf life (105℃)	Test time: 1000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±15% of initial value Tangent of the loss angle: 150% or less of the initial specified value Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

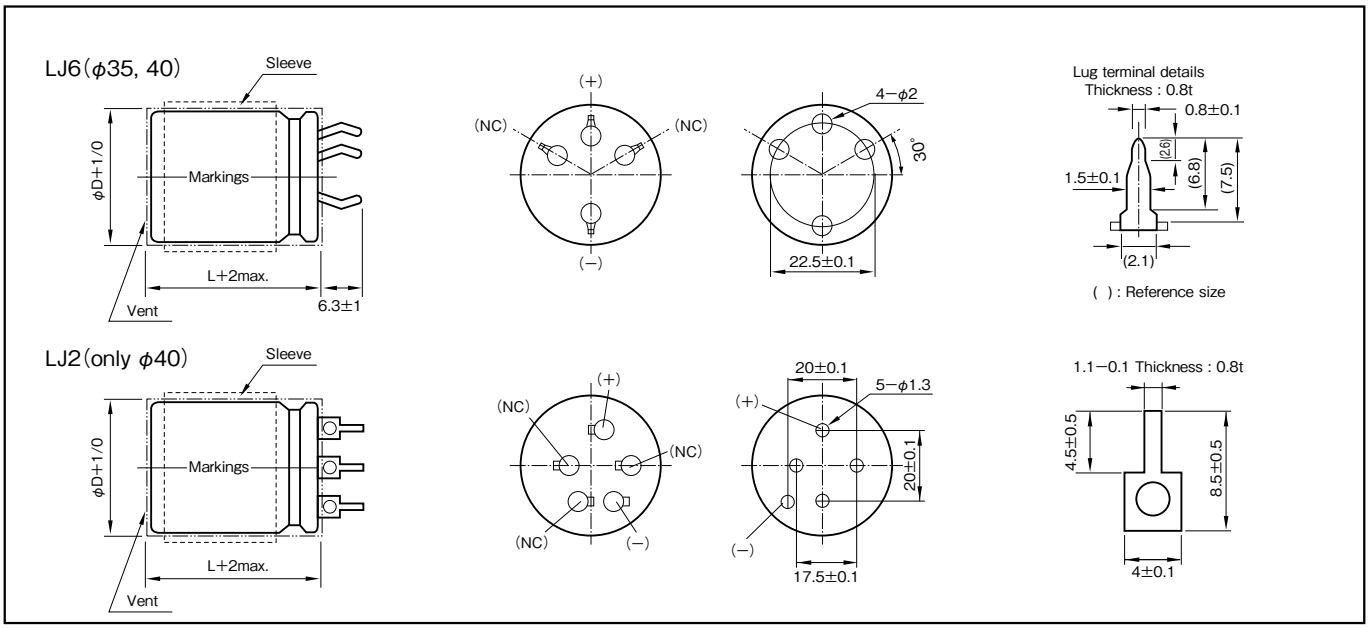

Part numbering system (example : 350V1500μF)

LJ6	—	350	V	152	M	S5D	#	B
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50	120	1k	10k	30k
200 to 250	0.87	1	1.11	1.18	1.20
315 to 500	0.80	1	1.14	1.19	1.20

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage(V) / Item / Case φD×L(mm) / Casing symbol	200			250			315			350		
	Rated capacitance (μF)	ESR (Ω max.)	Rated ripple current (Arms)	Rated capacitance (μF)	ESR (Ω max.)	Rated ripple current (Arms)	Rated capacitance (μF)	ESR (Ω max.)	Rated ripple current (Arms)	Rated capacitance (μF)	ESR (Ω max.)	Rated ripple current (Arms)
35×40 S55	–	–	–	–	–	–	820	0.24	2.23	–	–	–
35×45 S56	–	–	–	–	–	–	1000	0.20	2.62	–	–	–
35×50 S57	2200	0.090	4.05	–	–	–	1200	0.17	3.03	820	0.24	2.10
35×55 S58	–	–	–	1500	0.13	3.17	–	–	–	–	–	–
35×60 S59	2700	0.073	4.77	1800	0.11	3.69	1500	0.13	3.55	1000	0.20	2.46
35×70 S5B	–	–	–	2200	0.09	4.31	1800	0.11	4.07	1200	0.17	2.84
35×80 S5C	3300	0.060	5.56	2700	0.07	5.24	–	–	–	–	–	–
35×90 S5D	–	–	–	–	–	–	–	–	–	1500	0.13	3.34
35×100 S5E	3900	0.051	6.64	–	–	–	–	–	–	1800	0.11	3.82
40×45 S66	2200	0.090	4.40	–	–	–	–	–	–	–	–	–
40×50 S67	–	–	–	1800	0.11	3.77	1200	0.17	3.11	1000	0.20	2.50
40×60 S69	2700	0.073	5.17	2200	0.09	4.43	1500	0.13	3.67	1200	0.17	2.90
40×70 S6B	3300	0.060	6.02	2700	0.07	5.42	1800	0.11	4.21	1500	0.13	3.40
40×80 S6C	3900	0.051	7.00	–	–	–	–	–	–	1800	0.11	3.95

Rated voltage(V) / Item / Case φD×L(mm) / Casing symbol	400			450			500		
	Rated capacitance (μF)	ESR (Ω max.)	Rated ripple current (Arms)	Rated capacitance (μF)	ESR (Ω max.)	Rated ripple current (Arms)	Rated capacitance (μF)	ESR (Ω max.)	Rated ripple current (Arms)
35×45 S56	–	–	–	–	–	–	390	0.51	1.65
35×50 S57	–	–	–	560	0.36	2.16	–	–	–
35×55 S58	820	0.24	2.49	–	–	–	–	–	–
35×60 S59	–	–	–	680	0.29	2.53	560	0.36	2.22
35×65 A65	–	–	–	820	0.24	2.94	–	–	–
35×70 S5B	–	–	–	–	–	–	680	0.29	2.57
35×75 A75	1200	0.17	3.55	–	–	–	–	–	–
35×80 S5C	–	–	–	1000	0.20	3.41	–	–	–
35×100 S5E	–	–	–	1200	0.17	3.90	–	–	–
35×105 AA5	1500	0.13	4.15	–	–	–	–	–	–
40×50 S67	–	–	–	680	0.29	2.45	560	0.36	2.15
40×55 S68	–	–	–	820	0.24	2.84	–	–	–
40×60 S69	1000	0.20	3.10	1000	0.20	3.33	680	0.29	2.51
40×70 S6B	–	–	–	–	–	–	820	0.24	3.05
40×75 B75	1200	0.17	3.65	–	–	–	–	–	–
40×80 S6C	1500	0.13	4.30	1200	0.17	3.65	–	–	–

(Note) Rated ripple current : 105℃ , 120Hz ; ESR. : 20℃ , 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

LM,LPM LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS ELNA®

For-Inverter,High-Ripple Capacitors

GREEN CAP | 85°C 2000hours

- Withstands high-ripple current generated by the voltage doubler rectifier system.
- Guarantees 2000 hours at 85℃.

High ripple

LM, LPM ⇦ LA5

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (°C)	−25 to +85
Tolerance at rated capacitance (%)	±10 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 5mA whichever is larger (after 5 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 250, 400 tanδ (max.): 0.05 (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 250, 400 Impedance ratio (max.) Z−25℃/Z+20℃: 4 (120Hz)
Endurance (85℃) (Applied ripple current)	Test time: 2000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 200% or less of the initial specified value
Shelf life (85℃)	Test time: 500 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±15% of initial value Tangent of the loss angle: 150% or less of the initial specified value Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

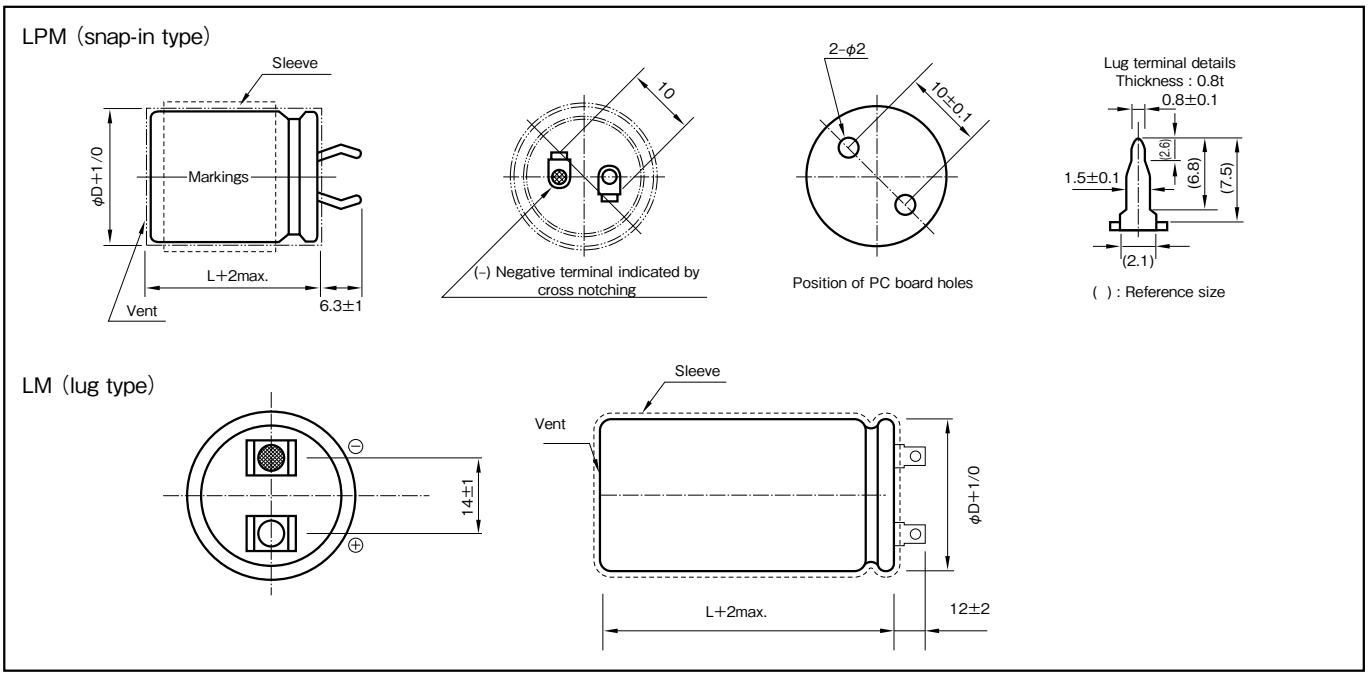

Part numbering system (example : 250V440μF)

LM	—	250	V	441	K	S6E	#	B
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50	120	400	1k	10k
250, 400	0.80	1	1.32	1.46	1.61

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

LM series Standard Ratings

250V					
Rated capacitance (μF)	Case (mm)		Casing symbol	ESR (Ω max.)	Rated ripple current (Arms)
	φD	L			
200	40	100	S6E	0.33	3.80
220	40	100	S6E	0.30	4.00
330	40	100	S6E	0.20	4.85
360	40	100	S6E	0.18	5.10
390	40	100	S6E	0.17	5.30
420	40	100	S6E	0.16	5.50
440	40	100	S6E	0.15	5.60

400V					
Rated capacitance (μF)	Case (mm)		Casing symbol	ESR (Ω max.)	Rated ripple current (Arms)
	φD	L			
90	35	80	S5C	0.74	3.00
	40	80	S6C	0.74	3.00
100	35	90	S5D	0.66	3.20
	40	90	S6D	0.66	3.20
110	35	100	S5E	0.60	3.30
	40	100	S6E	0.60	3.30
150	35	100	S5E	0.44	3.90
	40	100	S6E	0.44	3.90
165	40	100	S6E	0.40	4.10
220	40	100	S6E	0.30	4.10

(Note) Rated ripple current : 85℃ , 120Hz ; ESR. : 20℃ , 120Hz

LPM series Standard Ratings

250V					
Rated capacitance (μF)	Case (mm)		Casing symbol	ESR (Ω max.)	Rated ripple current (Arms)
	φD	L			
100	35	40	S55	0.66	1.90
110	35	40	S55	0.60	2.00
165	35	45	S56	0.40	2.45
180	35	50	S57	0.37	2.58
195	35	50	S57	0.34	2.68
210	35	50	S57	0.32	2.78
220	35	50	S57	0.30	2.80

400V					
Rated capacitance (μF)	Case (mm)		Casing symbol	ESR (Ω max.)	Rated ripple current (Arms)
	φD	L			
45	35	50	S57	1.47	1.50
55	35	40	S55	1.21	1.70
75	35	50	S57	0.88	1.98
82	35	50	S57	0.81	2.00

(Note) Rated ripple current : 85℃ , 120Hz ; ESR. : 20℃ , 120Hz

Screw Terminal, Long Life, High Temperature Capacitors

GREEN CAP | 105°C 5000hours

- Screw Terminal, Long Life, High Temperature capacitors.
- Guarantees 5000 hours at 105°C.

Large capacitance

LYX ⇦ LJ6

Marking color : Silver print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 5mA whichever is larger (after 5 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	0.20 (20℃,120Hz)
Endurance (105℃) (Applied ripple current)	Test time: 5000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 200% or less of the initial specified value
Shelf life (105℃)	Test time: 1000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 200% or less of the initial specified value Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

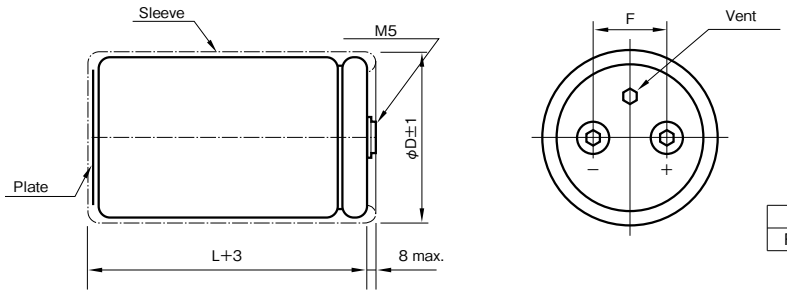

φD	36	51	64	77	90	101
F±1	12.7	22.0	28.2	31.4	31.4	41.5

Mounting Clamp

Unit : mm

Code J (2−legs)



φD	W1	W2	A	B
36	48	58	3.8	7
51	68	80	5	7
64	81	93	5	7
77	93.5	106	5	7
90	108	120.5	5	7

Code K (3−legs)



φD	R1	R2	A	B
51	31.8	36.5	5	7
64	38.1	42.6	5	7
77	44.5	49.2	5	7
90	50.8	55.6	5	7
101	57.5	63.5	6	8



φD	H
36	15
51～101	30

Part numbering system (example : 400V3300μF)

LYX	—	400	V	332	M	DD0	B	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol	Optional symbol	Clamp code

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50	120	300	1k	10k
350 to 450	0.80	1	1.10	1.30	1.40

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

350V						400V					
Rated capacitance (μF)	Case (mm) φD	Case (mm) L	Casing symbol	ESR (mΩ max.)	Rated ripple current (mArms)	Rated capacitance (μF)	Case (mm) φD	Case (mm) L	Casing symbol	ESR (mΩ max.)	Rated ripple current (mArms)
1000	51	75	C75	259	3.9	1000	51	75	C75	215	3.9
1200	51	75	C75	215	4.2	1200	51	96	C96	179	4.6
1500	51	96	C96	172	5.2	1500	51	115	CB5	143	5.6
1800	51	96	C96	143	5.7	1800	51	130	CD0	119	6.4
2200	51	130	CD0	117	7.1	2200	64	96	D96	98	6.9
2700	64	96	D96	96	7.7	2700	64	115	DB5	80	8.2
3300	64	115	DB5	78	9.1	3300	64	130	DD0	65	9.5
3900	64	130	DD0	66	10.4	3900	64	155	DF5	55	11.1
4700	64	155	DF5	55	12.2		77	115	EB5	55	10.4
	77	115	EB5	55	11.5	4700	64	195	DJ5	46	13.4
5600	64	195	DJ5	46	14.6		77	130	ED0	46	12.0
	77	130	ED0	46	13.1	5600	64	195	DJ5	39	14.6
6800	77	155	EF5	38	15.5		77	155	EF5	39	14.0
8200	90	157	FF7	31	18.1	6800	90	157	FF7	32	16.5
10000	90	157	FF7	26	19.9	8200	90	157	FF7	26	18.1
12000	90	196	FJ6	22	23.8	10000	90	196	FJ6	22	21.7
15000	90	236	FN6	17	28.8	12000	90	236	FN6	18	25.8

450V					
Rated capacitance (μF)	Case (mm) φD	Case (mm) L	Casing symbol	ESR (mΩ max.)	Rated ripple current (mArms)
1000	51	96	C96	215	4.2
1200	51	115	CB5	179	5.0
1500	51	130	CD0	143	5.9
1800	64	96	D96	119	6.3
2200	64	115	DB5	98	7.4
2700	64	130	DD0	80	8.6
	77	115	EB5	80	8.7
3300	64	155	DF5	65	10.2
	77	130	ED0	65	10.1
3900	64	195	DJ5	55	12.3
4700	77	155	EF5	46	12.9
5600	77	195	EJ5	38	15.4
	90	157	FF7	38	14.9
6800	90	196	FJ6	32	18.0
8200	90	196	FJ6	27	19.8
10000	90	236	FN6	22	23.6

(Note) Rated ripple current : 105℃ , 120Hz ; ESR. : 20℃ , 120Hz

Screw Terminal, Long Life Capacitors

GREEN CAP | 85°C 20000hours

- Screw Terminal, Long Life capacitors.
- Guarantees 20000 hours at 85°C.

Long life

LYL ⇦ LY6

Marking color : Silver print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 5mA whichever is larger (after 5 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	0.20 (20℃,120Hz)
Endurance (85℃) (Applied ripple current)	Test time: 20000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 200% or less of the initial specified value
Shelf life (85℃)	Test time: 1000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 200% or less of the initial specified value Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

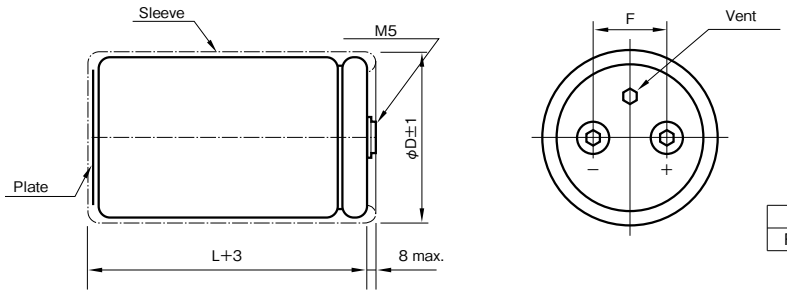

φD	36	51	64	77	90	101
F±1	12.7	22.0	28.2	31.4	31.4	41.5

Mounting Clamp

Unit : mm

Code J (2−legs)



φD	W1	W2	A	B
36	48	58	3.8	7
51	68	80	5	7
64	81	93	5	7
77	93.5	106	5	7
90	108	120.5	5	7

Code K (3−legs)



φD	R1	R2	A	B
51	31.8	36.5	5	7
64	38.1	42.6	5	7
77	44.5	49.2	5	7
90	50.8	55.6	5	7
101	57.5	63.5	6	8



φD	H
36	15
51～101	30

Part numbering system (example : 450V4700μF)

LYL	—	450	V	472	M	EF5	B	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol	Optional symbol	Clamp code

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50	120	300	1k	10k
350 to 450	0.80	1	1.10	1.30	1.40

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

350V					
Rated capacitance (μF)	Case (mm) φD	Case (mm) L	Casing symbol	ESR (mΩ max.)	Rated ripple current (mArms)
1000	51	75	C75	259	3.9
1200	51	75	C75	215	4.2
1500	51	96	C96	172	5.2
1800	51	96	C96	143	5.7
2200	51	130	CD0	117	7.1
2700	64	96	D96	96	7.7
3300	64	115	DB5	78	9.1
3900	64	130	DD0	66	10.4
4700	64	155	DF5	55	12.2
	77	115	EB5	55	11.5
5600	64	195	DJ5	46	14.6
	77	130	ED0	46	13.1
6800	77	155	EF5	38	15.5
8200	90	157	FF7	31	18.1
10000	90	157	FF7	26	19.9
12000	90	196	FJ6	22	23.8
15000	90	236	FN6	17	28.8

400V					
Rated capacitance (μF)	Case (mm) φD	Case (mm) L	Casing symbol	ESR (mΩ max.)	Rated ripple current (mArms)
1000	51	75	C75	215	3.9
1200	51	96	C96	179	4.6
1500	51	115	CB5	143	5.6
1800	51	130	CD0	119	6.4
2200	64	96	D96	98	6.9
2700	64	115	DB5	80	8.2
3300	64	130	DD0	65	9.5
3900	64	155	DF5	55	11.1
	77	115	EB5	55	10.4
4700	64	195	DJ5	46	13.4
	77	130	ED0	46	12.0
5600	64	195	DJ5	39	14.6
	77	155	EF5	39	14.0
6800	90	157	FF7	32	16.5
8200	90	157	FF7	26	18.1
10000	90	196	FJ6	22	21.7
12000	90	236	FN6	18	25.8

450V					
Rated capacitance (μF)	Case (mm) φD	Case (mm) L	Casing symbol	ESR (mΩ max.)	Rated ripple current (mArms)
1000	51	96	C96	215	4.2
1200	51	115	CB5	179	5.0
1500	51	130	CD0	143	5.9
1800	64	96	D96	119	6.3
2200	64	115	DB5	98	7.4
2700	64	130	DD0	80	8.6
	77	115	EB5	80	8.7
3300	64	155	DF5	65	10.2
	77	130	ED0	65	10.1
3900	64	195	DJ5	55	12.3
4700	77	155	EF5	46	12.9
5600	77	195	EJ5	38	15.4
	90	157	FF7	38	14.9
6800	90	196	FJ6	32	18.0
8200	90	196	FJ6	27	19.8
10000	90	236	FN6	22	23.6

(Note) Rated ripple current : 85℃ , 120Hz ; ESR. : 20℃ , 120Hz

LY6 LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Screw Terminal, Miniaturized, High Ripple Capacitors

GREEN CAP | 85°C 5000hours

- Screw Terminal, Miniaturized, High Ripple capacitors.
- Guarantees 5000 hours at 85°C.

Miniaturized
High ripple

LY6 ⇦ LY5

Marking color : Silver print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−25 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 5mA whichever is larger (after 5 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 400, 450 / 500, 550 / 600 tanδ (max.): 0.15 / 0.20 / 0.25 (20℃,120Hz)
Endurance (85℃) (Applied ripple current)	Test time: 5000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 200% or less of the initial specified value
Shelf life (85℃)	Test time: 1000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 200% or less of the initial specified value Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

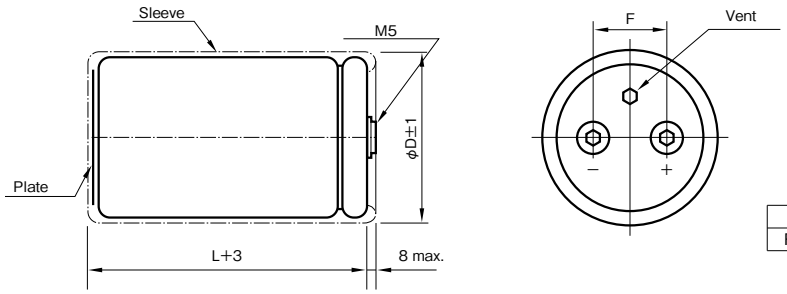

φD	36	51	64	77	90	101
F±1	12.7	22.0	28.2	31.4	31.4	41.5

Mounting Clamp

Unit : mm

Code J (2−legs)



φD	W1	W2	A	B
36	48	58	3.8	7
51	68	80	5	7
64	81	93	5	7
77	93.5	106	5	7
90	108	120.5	5	7

Code K (3−legs)



φD	R1	R2	A	B
51	31.8	36.5	5	7
64	38.1	42.6	5	7
77	44.5	49.2	5	7
90	50.8	55.6	5	7
101	57.5	63.5	6	8



φD	H
36	15
51～101	30

Part numbering system (example : 400V12000μF)

LY6	—	400	V	123	M	FF7	B	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol	Optional symbol	Clamp code

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50	120	300	1k	10k
400 to 600	0.80	1	1.10	1.30	1.40

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

400V					
Rated capacitance (μF)	Case (mm) φD	Case (mm) L	Casing symbol	ESR (mΩ max.)	Rated ripple current (mArms)
2200	51	115	CB5	98	8.8
2700	51	130	CD0	80	10.2
3300	64	96	D96	65	11.0
3900	64	115	DB5	55	12.8
4700	64	130	DD0	46	14.8
5600	77	115	EB5	38	16.2
6800	77	130	ED0	32	18.7
8200	77	155	EF5	26	22.0
10000	77	195	EJ5	22	26.7
	90	131	FD1	22	24.2
12000	90	157	FF7	18	28.5
15000	90	196	FJ6	14	34.8
18000	90	236	FN6	12	41.2
22000	101	237	GN7	10	47.0
—	—	—	—	—	—
—	—	—	—	—	—

450V					
Rated capacitance (μF)	Case (mm) φD	Case (mm) L	Casing symbol	ESR (mΩ max.)	Rated ripple current (mArms)
1800	51	115	CB5	119	7.6
2200	51	130	CD0	98	8.8
2700	64	96	D96	80	9.5
3300	64	115	DB5	65	11.2
3900	64	130	DD0	55	12.8
4700	77	115	EB5	46	14.1
5600	77	130	ED0	38	16.2
6800	77	155	EF5	32	19.1
8200	77	195	EJ5	26	23.0
	90	131	FD1	26	21.0
10000	90	171	FH1	22	25.7
12000	90	196	FJ6	18	29.7
	101	175	GH5	18	29.3
15000	90	236	FN6	14	35.9
	101	195	GJ5	14	24.2
18000	101	237	GN7	12	40.5

500V					
Rated capacitance (μF)	Case (mm) φD	Case (mm) L	Casing symbol	ESR (mΩ max.)	Rated ripple current (mArms)
1200	51	115	CB5	215	6.2
	64	96	D96	215	6.3
1500	51	130	CD0	172	7.3
	64	96	D96	172	7.1
1800	64	115	DB5	143	8.3
2200	64	130	DD0	117	9.6
2700	77	115	EB5	96	10.7
3300	77	130	ED0	78	12.4
3900	77	155	EF5	66	14.4
4700	77	171	EH1	55	16.5
	90	131	FD1	55	15.8
5600	77	195	EJ5	46	19.0
	90	157	FF7	46	18.6
6800	90	171	FH1	38	21.2
8200	90	196	FJ6	31	24.5
	101	175	GH5	31	24.2
10000	90	236	FN6	26	29.3
	101	195	GJ5	26	27.9
12000	101	237	GN7	22	33.1

550V					
Rated capacitance (μF)	Case (mm) φD	Case (mm) L	Casing symbol	ESR (mΩ max.)	Rated ripple current (mArms)
1000	51	130	CD0	258	5.9
1200	64	115	DB5	215	6.8
1500	64	130	DD0	172	8.0
1800	77	115	EB5	143	8.7
2200	77	130	ED0	117	10.1
2700	77	155	EF5	96	12.0
3300	77	155	EF5	78	13.3
3900	90	157	FF7	66	15.5
4700	90	171	FH1	55	17.6
5600	90	196	FJ6	46	20.3
6800	90	236	FN6	38	24.1
8200	101	237	GN7	31	27.3

600V					
Rated capacitance (μF)	Case (mm) φD	Case (mm) L	Casing symbol	ESR (mΩ max.)	Rated ripple current (mArms)
1000	64	130	DD0	323	5.4
1200	77	115	EB5	269	6.1
1500	77	130	ED0	214	7.3
1800	77	155	EF5	179	8.9
2200	90	131	FD1	146	9.7
2700	90	157	FF7	120	11.6
3300	90	171	FH1	98	13.4
3900	90	196	FJ6	83	16.2
4700	90	196	FJ6	69	19.5
5600	101	220	FM0	58	22.5

(Note) Rated ripple current : 85℃ , 120Hz ; ESR. : 20℃ , 120Hz

LY5 LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS

ELNA®

Screw Terminal, Standard Capacitors

GREEN CAP | 85°C 2000hours

- Screw Terminal, Standard capacitors.
- Guarantees 2000 hours at 85°C.

Large capacitance

LY5 ⇦ LA5

Marking color : Silver print on a black sleeve

Specifications

Item	Performance	
Category temperature range (℃)	−40 to +85	−25 to +85
Rated voltage (V)	10 to 250	350 to 630
Tolerance at rated capacitance (%)	±20	(20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 5mA whichever is larger (after 5 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V)	(20℃)
Tangent of loss angle (tanδ)	Refer to the following pages	(20℃,120Hz)
Endurance (85℃) (Applied ripple current)	Test time: 2000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 200% or less of the initial specified value	
Shelf life (85℃)	Test time: 1000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 200% or less of the initial specified value Voltage application treatment : According to JIS C5101-4 4.1	
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)	

Outline Drawing

Unit : mm

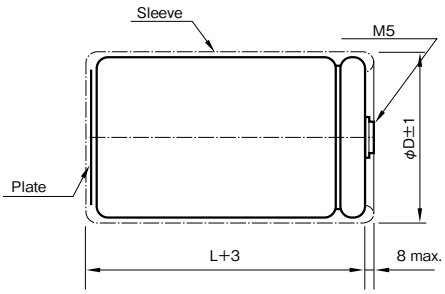



φD	36	51	64	77	90	101
F±1	12.7	22.0	28.2	31.4	31.4	41.5

Mounting Clamp

Unit : mm

Code J (2−legs)



φD	W1	W2	A	B
36	48	58	3.8	7
51	68	80	5	7
64	81	93	5	7
77	93.5	106	5	7
90	108	120.5	5	7

Code K (3−legs)



φD	R1	R2	A	B
51	31.8	36.5	5	7
64	38.1	42.6	5	7
77	44.5	49.2	5	7
90	50.8	55.6	5	7
101	57.5	63.5	6	8



φD	H
36	15
51～101	30

Part numbering system (example : 50V47000μF)

LY5	—	50	V	473	M	CB5	B	☐
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol	Optional symbol	Clamp code

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50	120	300	1k	10k
10 to 50	0.95	1	1.04	1.10	1.15
63 to 160	0.95	1	1.06	1.16	1.30
200 to 500	0.80	1	1.10	1.25	1.50
600 to 630	0.80	1	1.10	1.30	1.40

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

10V						16V						25V					
Rated capacitance (μF)	tanδ	Case (mm) φD	Case (mm) L	Casing symbol	Rated ripple current (mArms)	Rated capacitance (μF)	tanδ	Case (mm) φD	Case (mm) L	Casing symbol	Rated ripple current (mArms)	Rated capacitance (μF)	tanδ	Case (mm) φD	Case (mm) L	Casing symbol	Rated ripple current (mArms)
33,000	0.80	36	53	A53	4.3	22,000	0.60	36	53	A53	4.1	15,000	0.50	36	53	A53	3.7
39,000	0.80	36	53	A53	4.7	27,000	0.60	36	53	A53	4.5	18,000	0.50	36	53	A53	4.1
47,000	0.80	36	65	A65	5.2	33,000	0.60	36	53	A53	5.0	22,000	0.50	36	53	A53	4.5
56,000	0.80	36	83	A83	6.1	39,000	0.60	36	65	A65	5.9	27,000	0.50	36	65	A65	5.0
68,000	0.80	36	83	A83	6.7	47,000	0.60	36	83	A83	6.4	33,000	0.50	36	83	A83	5.9
82,000	0.80	36	100	AA0	7.7	56,000	0.60	36	83	A83	7.3	39,000	0.50	36	83	A83	6.7
100,000	0.80	36	101	AA1	8.8	68,000	0.60	36	100	AA0	8.4	47,000	0.50	36	100	AA0	7.7
120,000	0.80	36	121	AC1	10.0	82,000	0.80	36	100	AA0	8.3	56,000	0.60	36	100	AA0	7.9
150,000	1.00	36	121	AC1	10.8	100,000	0.80	36	121	AC1	9.5	68,000	0.60	36	121	AC1	9.2
180,000	1.00	51	96	C96	12.0	120,000	0.80	36	121	AC1	10.9	82,000	0.60	36	121	AC1	10.4
220,000	1.50	51	121	CC1	11.2	150,000	1.00	51	96	C96	11.3	100,000	0.60	51	96	C96	10.3
270,000	1.50	51	122	CC2	12.8	180,000	1.00	51	115	CB5	12.8	120,000	0.80	51	115	CB5	11.7
330,000	1.50	64	96	D96	15.3	220,000	1.00	51	130	CD0	15.3	150,000	0.80	51	130	CD0	14.1
390,000	1.50	64	115	DB5	17.3	270,000	1.00	64	96	D96	17.6	180,000	0.80	64	96	D96	15.7
470,000	2.00	64	130	DD0	16.7	330,000	1.50	64	115	DB5	16.8	220,000	1.00	64	115	DB5	16.1
560,000	2.00	77	115	EB5	19.0	390,000	1.50	64	130	DD0	18.3	270,000	1.00	64	130	DD0	18.6
680,000	2.00	77	130	ED0	21.7	470,000	1.50	77	115	EB5	21.3	330,000	1.00	64	155	DF5	21.9
820,000	2.00	77	155	EF5	24.7	560,000	1.50	77	130	ED0	23.6	390,000	1.20	77	115	EB5	22.0
—	—	—	—	—	—	680,000	1.50	77	155	EF5	27.6	470,000	1.20	77	155	EF5	25.6
—	—	—	—	—	—	820,000	2.00	90	157	FF7	27.1	560,000	1.20	90	131	FD1	27.9
—	—	—	—	—	—	—	—	—	—	—	—	680,000	1.20	90	157	FF7	32.5

35V						50V						63V					
Rated capacitance (μF)	tanδ	Case (mm) φD	Case (mm) L	Casing symbol	Rated ripple current (mArms)	Rated capacitance (μF)	tanδ	Case (mm) φD	Case (mm) L	Casing symbol	Rated ripple current (mArms)	Rated capacitance (μF)	tanδ	Case (mm) φD	Case (mm) L	Casing symbol	Rated ripple current (mArms)
10,000	0.40	36	53	A53	3.4	5,600	0.30	36	53	A53	3.0	3,900	0.25	36	53	A53	2.7
12,000	0.40	36	53	A53	3.7	6,800	0.30	36	53	A53	3.3	4,700	0.25	36	53	A53	3.0
15,000	0.40	36	65	A65	4.2	8,200	0.30	36	53	A53	3.6	5,600	0.25	36	53	A53	3.3
18,000	0.40	36	83	A83	4.7	10,000	0.30	36	65	A65	4.0	6,800	0.25	36	65	A65	3.6
22,000	0.40	36	83	A83	5.7	12,000	0.30	36	83	A83	4.7	8,200	0.25	36	83	A83	4.3
27,000	0.40	36	100	AA0	6.3	15,000	0.30	36	83	A83	5.5	10,000	0.25	36	83	A83	4.9
33,000	0.40	36	100	AA0	7.2	18,000	0.30	36	100	AA0	6.2	12,000	0.25	36	100	AA0	5.6
39,000	0.50	36	121	AC1	8.3	22,000	0.40	36	121	AC1	6.3	15,000	0.30	36	100	AA0	5.9
47,000	0.50	51	96	C96	8.7	27,000	0.40	36	121	AC1	7.1	18,000	0.30	36	121	AC1	6.7
56,000	0.60	51	96	C96	8.6	33,000	0.40	51	96	C96	8.2	22,000	0.30	36	121	AC1	7.8
68,000	0.60	51	115	CB5	9.8	39,000	0.50	51	96	C96	8.1	27,000	0.40	51	96	C96	7.4
82,000	0.60	64	96	D96	11.6	47,000	0.50	51	115	CB5	9.3	33,000	0.40	51	96	C96	8.4
100,000	0.60	64	115	DB5	13.3	56,000	0.50	64	96	D96	10.5	39,000	0.40	51	115	CB5	9.5
120,000	0.80	64	121	DC1	14.8	68,000	0.50	64	96	D96	12.0	47,000	0.40	51	130	CD0	11.3
150,000	0.80	64	130	DD0	14.9	82,000	0.50	64	115	DB5	13.7	56,000	0.40	64	115	DB5	12.8
180,000	0.80	77	115	EB5	17.0	100,000	0.60	77	115	EB5	14.7	68,000	0.50	64	121	DC1	12.7
220,000	0.80	77	130	ED0	20.0	120,000	0.60	77	115	EB5	16.7	82,000	0.50	64	130	DD0	14.5
270,000	1.00	77	155	EF5	20.3	150,000	0.60	77	130	ED0	19.3	100,000	0.50	77	115	EB5	16.7
330,000	1.00	90	131	FD1	23.5	180,000	0.60	77	155	EF5	21.9	120,000	0.50	77	130	ED0	18.9
390,000	1.00	90	157	FF7	26.4	220,000	0.60	90	131	FD1	21.4	150,000	0.50	77	155	EF5	22.4
470,000	1.00	90	157	FF7	29.6	270,000	0.60	90	157	FF7	24.6	180,000	0.60	90	131	FD1	22.4
—	—	—	—	—	—	—	—	—	—	—	—	220,000	0.60	90	157	FF7	26.2

80V						100V					
Rated capacitance (μF)	tanδ	Case (mm) φD	Case (mm) L	Casing symbol	Rated ripple current (mArms)	Rated capacitance (μF)	tanδ	Case (mm) φD	Case (mm) L	Casing symbol	Rated ripple current (mArms)
3,300	0.25	36	53	A53	2.5	1,800	0.25	36	53	A53	1.9
3,900	0.25	36	53	A53	2.8	2,200	0.25	36	53	A53	2.1
4,700	0.25	36	65	A65	3.0	2,700	0.25	36	53	A53	2.3
5,600	0.25	36	83	A83	3.6	3,300	0.25	36	65	A65	2.6
6,800	0.25	36	83	A83	3.9	3,900	0.25	36	83	A83	3.0
8,200	0.25	36	83	A83	4.5	4,700	0.25	36	83	A83	3.5
10,000	0.25	36	100	AA0	5.2	5,600	0.25	36	100	AA0	3.9
12,000	0.25	36	100	AA0	5.9	6,800	0.25	36	100	AA0	4.5
15,000	0.25	36	121	AC1	6.8	8,200	0.25	36	121	AC1	5.1
18,000	0.25	36	121	AC1	7.8	10,000	0.25	36	121	AC1	5.9
22,000	0.30	51	96	C96	8.0	12,000	0.25	51	75	C75	6.4
27,000	0.30	51	96	C96	9.2	15,000	0.25	51	96	C96	7.0
33,000	0.30	51	115	CB5	10.5	18,000	0.25	51	115	CB5	8.3
39,000	0.30	51	130	CD0	12.0	22,000	0.25	51	130	CD0	10.0
47,000	0.30	64	115	DB5	13.6	27,000	0.25	64	115	DB5	11.5
56,000	0.40	64	130	DD0	13.4	33,000	0.25	64	130	DD0	11.9
68,000	0.40	77	115	EB5	15.4	39,000	0.25	77	115	EB5	13.4
82,000	0.40	77	130	ED0	17.5	47,000	0.35	77	130	ED0	14.2
100,000	0.40	77	155	EF5	20.5	56,000	0.35	77	155	EF5	16.0
120,000	0.40	90	131	FD1	22.4	68,000	0.35	90	131	FD1	18.8
150,000	0.40	90	157	FF7	26.5	82,000	0.35	90	157	FF7	20.5
—	—	—	—	—	—	100,000	0.35	90	171	FH1	24.0

(Note) Rated ripple current : 85℃ , 120Hz

• The standard ratings follow the next page.

Standard Ratings

160V						200V						250V					
Rated capacitance (μF)	tanδ	Case (mm) φD	Case (mm) L	Casing symbol	Rated ripple current (mArms)	Rated capacitance (μF)	tanδ	Case (mm) φD	Case (mm) L	Casing symbol	Rated ripple current (mArms)	Rated capacitance (μF)	tanδ	Case (mm) φD	Case (mm) L	Casing symbol	Rated ripple current (mArms)
3,300	0.25	36	121	AC1	5.2	2,200	0.25	36	100	AA0	3.9	1,500	0.25	36	100	AA0	3.2
4,700	0.25	51	75	C75	5.9	3,300	0.25	51	75	C75	4.9	2,200	0.25	51	75	C75	4.0
5,600	0.25	51	96	C96	7.0	4,700	0.25	51	96	C96	6.4	3,300	0.25	51	96	C96	5.4
6,800	0.25	51	96	C96	7.8	5,600	0.25	51	115	CB5	7.6	4,700	0.25	64	96	D96	7.1
10,000	0.25	64	96	D96	10.4	6,800	0.25	51	130	CD0	8.8	6,800	0.25	64	115	DB5	9.1
12,000	0.25	51	120	CC0	11.3	8,200	0.25	64	96	D96	9.4	8,200	0.25	64	115	DB5	10.0
15,000	0.25	64	130	DD0	14.3	10,000	0.25	64	96	D96	10.4	10,000	0.25	64	130	DD0	11.7
18,000	0.25	64	130	DD0	15.6	15,000	0.25	77	96	E96	14.4	15,000	0.25	77	130	ED0	15.1
22,000	0.25	77	130	ED0	18.3	18,000	0.25	77	130	ED0	16.5	18,000	0.25	77	155	EF5	17.7
33,000	0.25	90	131	FD1	23.8	22,000	0.25	77	150	EF0	19.6	22,000	0.25	90	157	FF7	20.9
39,000	0.25	90	157	FF7	27.9	33,000	0.25	90	157	FF7	25.3	—	—	—	—	—	—

350V						400V						450V					
Rated capacitance (μF)	tanδ	Case (mm) φD	Case (mm) L	Casing symbol	Rated ripple current (mArms)	Rated capacitance (μF)	tanδ	Case (mm) φD	Case (mm) L	Casing symbol	Rated ripple current (mArms)	Rated capacitance (μF)	tanδ	Case (mm) φD	Case (mm) L	Casing symbol	Rated ripple current (mArms)
470	0.20	36	83	A83	2.2	470	0.20	36	83	A83	2.2	470	0.20	36	83	A83	2.2
680	0.20	36	83	A83	2.6	680	0.20	36	100	AA0	2.8	680	0.20	36	100	AA0	2.8
1,000	0.20	36	100	AA0	3.4	1,000	0.20	51	75	C75	3.5	820	0.20	51	75	C75	3.2
1,500	0.20	51	75	C75	4.3	1,200	0.20	51	75	C75	3.8	1,000	0.20	51	75	C75	3.5
1,800	0.20	51	96	C96	5.1	1,500	0.20	51	96	C96	4.7	1,200	0.20	51	96	C96	4.2
2,200	0.20	51	96	C96	5.7	1,800	0.20	51	96	C96	5.2	1,500	0.20	51	115	CB5	5.0
2,700	0.20	51	130	CD0	7.1	2,200	0.20	51	120	CC0	6.4	1,800	0.20	51	130	CD0	5.9
3,300	0.20	51	130	CD0	7.9	2,700	0.20	64	96	D96	7.0	2,200	0.20	64	96	D96	6.3
3,900	0.20	64	115	DB5	9.0	3,300	0.20	64	115	DB5	8.2	2,700	0.20	64	115	DB5	7.5
4,700	0.20	64	130	DD0	10.3	3,900	0.20	64	130	DD0	9.4	3,300	0.20	64	130	DD0	8.7
5,600	0.20	77	115	EB5	11.4	4,700	0.20	77	115	EB5	10.4	3,900	0.20	77	115	EB5	9.5
6,800	0.20	77	130	ED0	13.1	5,600	0.20	77	130	ED0	11.9	4,700	0.20	77	130	ED0	10.9
8,200	0.20	77	155	EF5	15.4	6,800	0.20	77	155	EF5	14.1	5,600	0.20	77	155	EF5	12.8
10,000	0.20	90	157	FF7	18.1	8,200	0.20	90	157	FF7	16.4	6,800	0.20	90	157	FF7	15.0
12,000	0.20	90	157	FF7	20.0	10,000	0.20	90	157	FF7	18.3	8,200	0.20	90	157	FF7	16.5
15,000	0.20	90	196	FJ6	24.5	12,000	0.20	90	196	FJ6	21.8	10,000	0.20	90	196	FJ6	20.0
18,000	0.20	90	236	FN6	28.8	15,000	0.20	90	236	FN6	26.3	12,000	0.20	90	236	FN6	23.6

500V						600V						630V					
Rated capacitance (μF)	tanδ	Case (mm) φD	Case (mm) L	Casing symbol	Rated ripple current (mArms)	Rated capacitance (μF)	tanδ	Case (mm) φD	Case (mm) L	Casing symbol	Rated ripple current (mArms)	Rated capacitance (μF)	tanδ	Case (mm) φD	Case (mm) L	Casing symbol	Rated ripple current (mArms)
1,000	0.25	51	115	CB5	4.6	1,200	0.25	64	96	D96	7.7	1,000	0.30	64	130	DD0	6.0
1,500	0.25	64	96	D96	5.7	1,500	0.25	64	115	DB5	9.3	1,200	0.30	77	115	EB5	6.7
2,200	0.25	64	130	DD0	6.9	1,800	0.25	77	96	E96	10.1	1,500	0.30	77	130	ED0	8.1
2,700	0.25	77	115	EB5	8.1	2,200	0.25	77	115	EB5	12.0	1,800	0.30	77	155	EF5	9.8
3,300	0.25	77	130	ED0	9.6	2,700	0.25	77	130	ED0	14.0	2,200	0.30	90	131	FD1	10.7
3,900	0.25	77	130	ED0	10.8	3,300	0.25	77	155	EF5	16.4	2,700	0.30	90	157	FF7	12.8
4,700	0.25	77	155	EF5	12.1	3,300	0.25	90	131	FD1	16.4	3,300	0.30	90	171	FH1	14.7
5,600	0.25	90	157	FF7	13.8	3,900	0.25	90	131	FD1	17.8	3,900	0.30	90	196	FJ6	17.9
6,800	0.25	90	171	FH1	15.8	4,700	0.25	90	157	FF7	21.0	4,700	0.30	90	196	FJ6	21.6
8,200	0.25	77	220	EM0	17.2	5,600	0.25	90	196	FJ6	24.5	5,600	0.30	101	220	FM0	24.9
10,000	0.25	90	236	FN6	22.1												

(Note) Rated ripple current : 85℃ , 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Aluminum Electrolytic Capacitors

Conductive Polymer Hybrid Aluminum Electrolytic Capacitors

Aluminum Electrolytic Capacitors With Conductive Polymer Solid Electrolyte

Chip Type Aluminum Electrolytic Capacitors

Miniature Type Aluminum Electrolytic Capacitors

Large Capacitance Aluminum Electrolytic Capacitors

Aluminum Electrolytic Capacitors for Audio

RVO VERTICAL CHIP TYPE ALUMINUM ELECTROLYTIC CAPACITORS FOR AUDIO

ELNA®

Chip Type Audio Use Capacitors

GREEN CAP | SMD | For Audio

- Audio grade surface mount product with completely new components using synthetic mica paper for the separator.
- Both quality sense and sound field that could not be realized by the surface mount products are reproducible.

For higher grade

RVO (PURECAP) ⇦ RVO

Marking color : Black print (φ4 to φ10)
There are also white print on a brown sleeve (φ8×10L, φ10×10L)

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V: Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 6.3, 10, 16, 25, 35, 50 tanδ (max.): 0.28, 0.24, 0.20, 0.14, 0.12, 0.10 (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 6.3, 10, 16, 25, 35, 50 Impedance ratio (max.) Z−25℃/Z+20℃: 3, 3, 2, 2, 2, 2 Impedance ratio (max.) Z−40℃/Z+20℃: 8, 5, 4, 3, 3, 3 (120Hz)
Endurance (85℃) (Applied ripple current)	Test time: 2000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 200% or less of the initial specified value
Shelf life (85℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

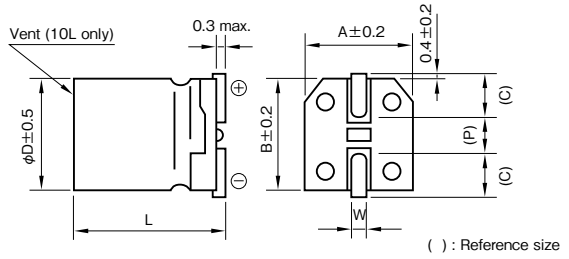

φD	L	A	B	C	W	P	Casing symbol
4	5.3±0.2	4.3	4.3	2.0	0.5 to 0.8	1.0	D55
5	5.3±0.2	5.3	5.3	2.3	0.5 to 0.8	1.5	E55
6.3	5.3±0.2	6.3	6.3	2.7	0.5 to 0.8	2.0	F55
8	6.5±0.3	8.4	8.4	3.4	0.5 to 0.8	2.3	G68
8	10±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	G10
10	10±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	H10

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50	120	1k	10k・100k
6.3 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50	0.80	1	1.35	1.50

Part numbering system

φ4 to φ6.3, φ8×6.5 (example : 16V47μF)

RVO — 16 V 470 M F55 P2U — □
Series code | Rated voltage symbol | Rated capacitance symbol | Capacitance tolerance symbol | Casing symbol | Taping symbol

φ8×10 (example : 16V330μF)

RVO — 16 V 331 M G10 Y1U — □
Series code | Rated voltage symbol | Rated capacitance symbol | Capacitance tolerance symbol | Casing symbol | Taping symbol

φ10×10 (example : 16V470μF)

RVO — 16 V 471 M H10 E U — □
Series code | Rated voltage symbol | Rated capacitance symbol | Capacitance tolerance symbol | Casing symbol | Taping symbol

＊Please inquire sleeve type P/N.

Standard Ratings

Rated capacitance (μF) \ Rated voltage (V) / Item	6.3 Case φD×L (mm)	6.3 Rated ripple current (mArms)	10 Case φD×L (mm)	10 Rated ripple current (mArms)	16 Case φD×L (mm)	16 Rated ripple current (mArms)	25 Case φD×L (mm)	25 Rated ripple current (mArms)	35 Case φD×L (mm)	35 Rated ripple current (mArms)	50 Case φD×L (mm)	50 Rated ripple current (mArms)
0.33	—	—	—	—	—	—	—	—	—	—	4×5.3	6
0.47	—	—	—	—	—	—	—	—	—	—	4×5.3	7
1	—	—	—	—	—	—	—	—	—	—	4×5.3	10
2.2	—	—	—	—	—	—	—	—	—	—	4×5.3	15
3.3	—	—	—	—	—	—	—	—	4×5.3	17	4×5.3	19
4.7	—	—	—	—	4×5.3	18	4×5.3	19	4×5.3	20	5×5.3	26
10	—	—	4×5.3	23	4×5.3	26	5×5.3	32	5×5.3	34	6.3×5.3	44
22	4×5.3	31	5×5.3	40	5×5.3	44	6.3×5.3	55	6.3×5.3	59	8×6.5	124
33	5×5.3	44	5×5.3	49	6.3×5.3	63	6.3×5.3	67	8×6.5	124	8×6.5	124
47	5×5.3	53	6.3×5.3	68	6.3×5.3	76	8×6.5	124	8×6.5	124	8×10	200
100	6.3×5.3	90	6.3×5.3	99	8×6.5	124	8×6.5	137	8×10	200	10×10	366
220	8×6.5	149	8×6.5	149	8×10	200	8×10	235	10×10	366	—	—
330	8×6.5	160	8×10	226	8×10	245	10×10	366	—	—	—	—
470	8×10	251	10×10	366	10×10	366	—	—	—	—	—	—
1000	10×10	423	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85℃, 120Hz.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Chip Type,For Audio,High Grade(SILMIC) Capacitors

GREEN CAP | SMD | For Audio

- Silk fiber paper products used surface mount device.
- Completely new audio products for the high-grade paper using silk fiber paper.
- Silk "flexibility" to reduce the vibration energy of the music, in the sense of high-frequency peak, a significant decrease in roughness of the midrange and bass increase.

SILMIC SMD

RVF ⇦ ROS

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 10 / 16 / 50 tanδ (max.): 0.32 / 0.26 / 0.12 (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 10 / 16 / 50 Impedance ratio (max.) Z−25℃/Z+20℃: 3 / 2 / 2 Impedance ratio (max.) Z−40℃/Z+20℃: 8 / 4 / 4 (120Hz)
Endurance (85℃)	Test time: 2000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 200% or less of the initial specified value
Shelf life (85℃)	Test time : 500hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

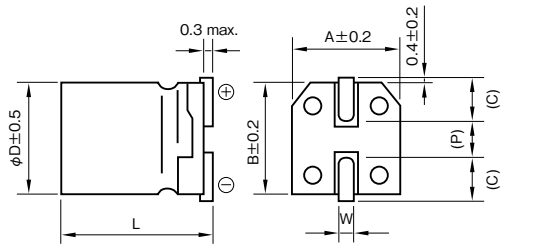

( ) : Reference size

φD	L	A	B	C	W	P	Casing symbol
4	5.3±0.2	4.3	4.3	2.0	0.5 to 0.8	1.0	D55
5	5.3±0.2	5.3	5.3	2.3	0.5 to 0.8	1.5	E55
6.3	5.3±0.2	6.6	6.6	2.7	0.5 to 0.8	2.0	F55
8	10±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	G10

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50	120	1k	10k·100k
10 to 16	0.80	1	1.15	1.25
50	0.80	1	1.35	1.50

Part numbering system (example : 16V10μF)

RVF	—	16	V	100	M	E55	U —	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping symbol

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	10 Case φD×L (mm)	10 Rated ripple current (mArms)	16 Case φD×L (mm)	16 Rated ripple current (mArms)	50 Case φD×L (mm)	50 Rated ripple current (mArms)
1	—	—	—	—	4×5.3	7
2.2	—	—	—	—	5×5.3	11
3.3	—	—	—	—	6.3×5.3	16
4.7	—	—	4×5.3	10	6.3×5.3	19
10	5×5.3	15	5×5.3	16	8×10	41
22	6.3×5.3	25	6.3×5.3	28	—	—
33	6.3×5.3	31	8×10	50	—	—
47	8×10	54	8×10	60	—	—
100	8×10	79	8×10	87	—	—

(Note) Rated ripple current : 85℃, 120Hz.

RVM VERTICAL CHIP TYPE ALUMINUM ELECTROLYTIC CAPACITORS FOR AUDIO

ELNA®

Chip Type,For Audio,High Grade Capacitors

GREEN CAP | SMD | 105℃ 2000hours | For Audio

- New developed Al-Foil and Electrolyte for Audio grade allow lower distortion.
- New range of bright and smooth sound is achieved in SMD area.
- Guarantees 2000 hours 105℃.

High temperature, Long life

RVM ⇦ RVG

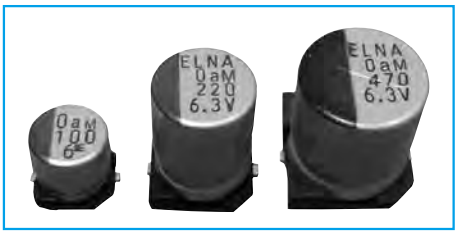

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF), V: Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	

Rated voltage (V)	6.3	10	16	25	35	50
tanδ (max.)	0.28	0.24	0.20	0.16	0.13	0.12

(20℃,120Hz)

Characteristics at high and low temperature

Rated voltage (V)		6.3	10	16	25	35	50
Impedance ratio (max.)	Z−25℃/Z+20℃	2	2	2	2	2	2
	Z−55℃/Z+20℃	8	4	4	3	3	3

(120Hz)

Endurance (105℃)

Test time	2000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±30% of initial value
Tangent of the loss angle	300% or less of the initial specified value

Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

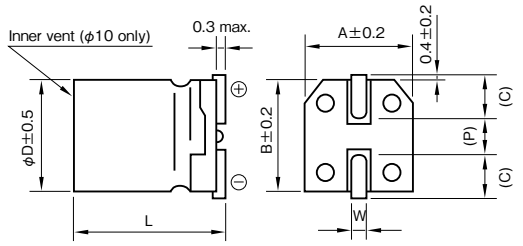

( ) : Reference size

φD	L	A	B	C	W	P	Casing symbol
4	5.8±0.3	4.3	4.3	2.0	0.5 to 0.8	1.0	D61
5	5.8±0.3	5.3	5.3	2.3	0.5 to 0.8	1.5	E61
6.3	5.8±0.3	6.6	6.6	2.7	0.5 to 0.8	2.0	F61
8	6.5±0.3	8.4	8.4	3.4	0.5 to 0.8	2.3	G68
8	10.5±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	GA5
10	10.5±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	HA5

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)		50	120	1k	10k・100k
6.3 to 16		0.80	1	1.15	1.25
25 to 35		0.80	1	1.25	1.40
50	1 to 3.3μF	0.50	1	1.35	1.50
	4.7μF or more	0.70	1	1.35	1.50

Part numbering system (example : 6.3V220μF)

RVM	—	6	V	221	M	GA5	P U —	R2
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping symbol

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3		10		16		25		35		50	
	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)
1	–	–	–	–	–	–	–	–	–	–	4×5.8	7
2.2	–	–	–	–	–	–	–	–	–	–	4×5.8	10
3.3	–	–	–	–	–	–	–	–	–	–	4×5.8	12
4.7	–	–	–	–	4×5.8	11	4×5.8	13	4×5.8	14	5×5.8	17
10	–	–	4×5.8	15	4×5.8	17	5×5.8	21	5×5.8	24	6.3×5.8	29
22	4×5.8	21	5×5.8	26	5×5.8	28	6.3×5.8	37	6.3×5.8	41	8×6.5	52
33	5×5.8	29	5×5.8	32	6.3×5.8	41	6.3×5.8	45	8×6.5	62	8×10.5	75
47	5×5.8	35	6.3×5.8	44	6.3×5.8	48	8×6.5	66	8×10.5	86	8×10.5	90
100	6.3×5.8	60	8×6.5	79	8×6.5 8×10.5	86 101	8×10.5	113	10×10.5	145	10×10.5	151
220	8×10.5	127	8×10.5	137	8×10.5 10×10.5	150 174	10×10.5	194	10×10.5	216	–	–
330	8×10.5	156	10×10.5	194	10×10.5	213	–	–	–	–	–	–
470	10×10.5	215	10×10.5	232	10×10.5	254	–	–	–	–	–	–

(Note) Rated ripple current : 105℃, 120Hz.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Chip Type Audio Use Capacitors

GREEN CAP | SMD | For Audio

- New developed Al-Foil and Electrolyte for Audio grade allow lower distortion.
- New range of bright and smooth sound is achieved in SMD area.

Marking color : Black print

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 6.3, 10, 16, 25, 35 tanδ (max.): 0.28, 0.24, 0.20, 0.16, 0.14 (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 6.3, 10, 16, 25, 35 Impedance ratio (max.) Z−25℃/Z+20℃: 4, 3, 2, 2, 2 Impedance ratio (max.) Z−40℃/Z+20℃: 8, 5, 4, 3, 3 (120Hz)
Endurance (85℃) (Applied ripple current)	Test time: 2000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 200% or less of the initial specified value
Shelf life (85℃)	Test time : 500hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -18 (IEC 60384-1, -18)

Outline Drawing

Unit : mm

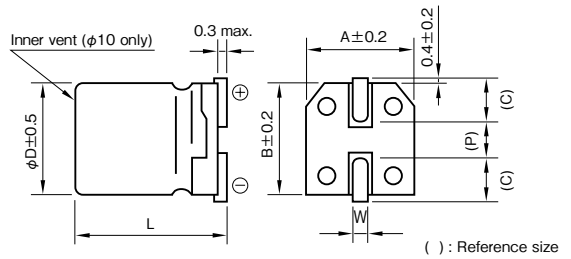

φD	L	A	B	C	W	P	Casing symbol
4	5.3±0.2	4.3	4.3	2.0	0.5 to 0.8	1.0	D55
5	5.3±0.2	5.3	5.3	2.3	0.5 to 0.8	1.5	E55
6.3	5.3±0.2	6.3	6.3	2.7	0.5 to 0.8	2.0	F55
8	6.5±0.3	8.4	8.4	3.4	0.5 to 0.8	2.3	G68
8	10±0.5	8.4	8.4	3.0	0.7 to 1.1	3.1	G10
10	10±0.5	10.4	10.4	3.3	0.7 to 1.1	4.7	H10

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50	120	1k	10k・100k
6.3 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40

Part numbering system (example : 16V47 μF)

RVG	—	16	V	470	M	F55	U	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping symbol

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3		10		16		25		35	
	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)
3.3	—	—	—	—	—	—	—	—	4×5.3	11
4.7	—	—	—	—	4×5.3	11	4×5.3	12	4×5.3	13
10	—	—	—	—	5×5.3	19	5×5.3	21	5×5.3	22
22	4×5.3	20	—	—	5×5.3	28	6.3×5.3	36	6.3×5.3	39
33	5×5.3	29	5×5.3	31	6.3×5.3	40	6.3×5.3	44	8×6.5	60
47	5×5.3	34	6.3×5.3	43	6.3×5.3	47	8×6.5	66	8×10	82
100	6.3×5.3	58	8×6.5	79	8×6.5	87	8×10	112	10×10	139
220	8×6.5	107	8×10	136	8×10	149	10×10	192	—	—
330	8×10	153	8×10	166	10×10	221	—	—	—	—
470	8×10	183	10×10	229	—	—	—	—	—	—

(Note) Rated ripple current : 85℃, 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

RFS MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS FOR AUDIO

ELNA®

■ SILMIC series Silk fiber using audio purpose capacitor

- ELNA developed new raw material for the separate paper which use a silk fibers. Therefore, this capacitor can give you high grade sound for your audio design.
- Due to the silk fiber's pliability, the capacitor makes a dream of the high quality sound.

For examples ;

- To relieve the music's vibration energy.
- To decrease the peak feeling sound at high compass and rough quality sound at middle compass.
- To increase massive sound at low compass.
- For bipolar capacitors, consult with us.

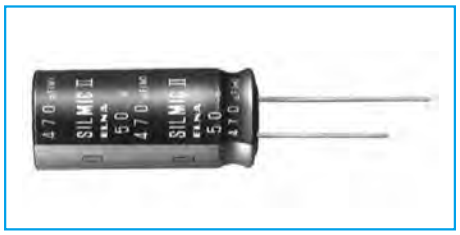

Marking color : White print on a brown sleeve

Miniature High Grade Capacitors for Audio(SILMIC II)

GREEN CAP | For Audio

- All lead wires oxygen-free copper for extremely low distortion. (Third high frequency distortion 10kHz,0.1A,-120dB or less)
- "SILMIC II" mark on sleeve.

For higher grade ⇦ For higher grade ⇦ For higher grade

RFS ⇦ ROS ⇦ ROA ⇦ ROB

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 5 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	

Rated voltage (V)	6.3	10	16	25	35	50	63	100
tanδ (max.)	0.20	0.17	0.13	0.10	0.10	0.08	0.08	0.08

0.02 is added to every 1000μF increase over 1000μF (20℃,120Hz)

Endurance (85℃) (Applied ripple current)

Test time	1000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	150% or less of the initial specified value

Shelf life (85℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

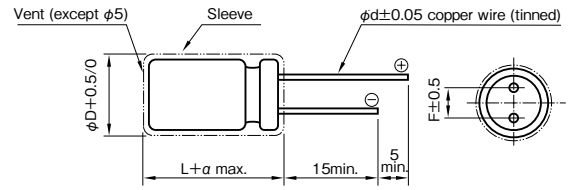

φD	5	6.3	8	10	12.5	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.6	0.6	0.6	0.6	0.6	0.8	0.8
α	1.5			2.0 (φ10,16L or less : 1.5)			

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	CV (μF×WV) \ Frequency (Hz)	50・60	120	1k	10k	100k
6.3 to 16	All CV value	0.8	1	1.1	1.2	1.2
25 to 35	≤1000	0.8	1	1.5	1.7	1.7
	1000<	0.8	1	1.2	1.3	1.3
50 to 100	≤1000	0.8	1	1.6	1.9	1.9
	1000<	0.8	1	1.2	1.3	1.3

Part numbering system (example : 25V100μF)

RFS	—	25	V	101	M	H4	#5	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping (Forming) symbol

Case symbol

Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol
5×11	E3	10×12.5	H3	12.5×20	I5	16×31.5	J7
6.3×11	F3	10×16	H4	12.5×25	I6	16×35.5	J8
8×11.5	G3	10×20	H5	16×25	J6	18×35.5	K8
						18×40	K9

Standard Ratings

Rated voltage (V) / Item: Rated capacitance (μF)	6.3 Case φD×L (mm)	6.3 Rated ripple current (mArms)	10 Case φD×L (mm)	10 Rated ripple current (mArms)	16 Case φD×L (mm)	16 Rated ripple current (mArms)	25 Case φD×L (mm)	25 Rated ripple current (mArms)	35 Case φD×L (mm)	35 Rated ripple current (mArms)	50 Case φD×L (mm)	50 Rated ripple current (mArms)	63 Case φD×L (mm)	63 Rated ripple current (mArms)	100 Case φD×L (mm)	100 Rated ripple current (mArms)
3.3	—	—	—	—	—	—	—	—	—	—	5×11 6.3×11	25 30	5×11	30	—	—
4.7	—	—	—	—	—	—	5×11	25	5×11	30	5×11 6.3×11	35 40	5×11 6.3×11	35 40	—	—
10	—	—	—	—	5×11	35	5×11 6.3×11	35 60	5×11 6.3×11	35 55	8×11.5	75	8×11.5	75	—	—
22	—	—	5×11	50	5×11 6.3×11	55 70	5×11 6.3×11	60 80	8×11.5	95	10×12.5	130	10×16	140	—	—
33	5×11	55	5×11 6.3×11	65 70	5×11 6.3×11	70 90	8×11.5	120	10×12.5	140	10×16	175	10×20	190	12.5×20	220
47	5×11 6.3×11	65 80	5×11 6.3×11	75 85	8×11.5	125	8×11.5	140	10×12.5	170	10×16	210	10×20	225	12.5×25	285
100	8×11.5	135	8×11.5	145	10×12.5	215	10×16	270	10×20	295	12.5×20	380	12.5×25	415	16×25	485
220	10×12.5	240	10×16	260	10×20	385	12.5×20	505	12.5×25	550	16×25	720	16×31.5	785	18×40	930
330	10×16	290	10×20	350	12.5×20	545	12.5×25	675	16×25	785	16×31.5	965	16×35.5	1010	—	—
470	10×20	390	12.5×20	455	12.5×25	710	16×25	940	16×31.5	1030	16×35.5	1210	18×35.5	1295	—	—
1000	12.5×20	710	16×25	835	16×31.5	1315	16×35.5	1575	18×35.5	1690	18×40	1985	—	—	—	—
2200	—	—	16×35.5	1500	18×40	2150	—	—	—	—	—	—	—	—	—	—
3300	—	—	18×40	1980	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85℃, 120Hz

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ SILMIC series Silk fiber using audio purpose capacitor

High Grade Capacitors for Audio(SILMIC)

GREEN CAP | For Audio

- All lead wires oxygen-free copper for extremely low distortion. (Third high frequency distortion 10kHz,0.1A,-120dB or less)
- "SILMIC" mark on sleeve.

Marking color : White print on a brown sleeve

For higher grade ⇦ For higher grade ⇦

ROS ⇦ ROA ⇦ ROB

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 5 minutes) C : Rated capacitance (μF) ; V: Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 16, 25, 35, 50, 63, 100 tanδ (max.): 0.13, 0.10, 0.10, 0.08, 0.08, 0.08 0.02 is added to every 1000μF increase over 1000μF (20℃,120Hz)
Endurance (85℃) (Applied ripple current)	Test time: 1000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 150% or less of the initial specified value
Shelf life (85℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

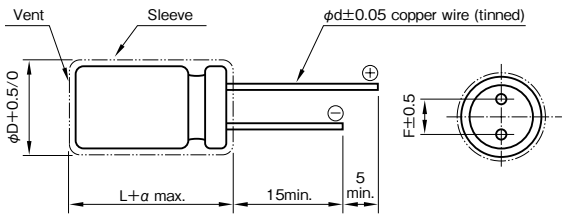

φD	6.3	8	10	12.5	16	18
F	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.6	0.6	0.6	0.8	0.8	0.8
α	1.5		2.0 (φ10,16L or less : 1.5)			

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Frequency (Hz) / CV(μF×WV)	50・60	120	1k	10k	100k
16	All CV value	0.8	1	1.1	1.2	1.2
25 to 35	≤1000	0.8	1	1.5	1.7	1.7
	1000<	0.8	1	1.2	1.3	1.3
50 to 100	≤1000	0.8	1	1.6	1.9	1.9
	1000<	0.8	1	1.2	1.3	1.3

Part numbering system (example : 25V100μF)

ROS	—	25	V	101	M	H4	#5	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping (Forming) symbol

Case symbol

Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol
6.3×11	F3	10×16	H4	12.5×25	I6	16×35.5	J8
8×11.5	G3	10×20	H5	16×25	J6	18×35.5	K8
10×12.5	H3	12.5×20	I5	16×31.5	J7	18×40	K9

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	16		25		35		50		63		100	
	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)	Case φD×L (mm)	Rated ripple current (mArms)
10	—	—	—	—	6.3×11	55	8×11.5	75	8×11.5	75	10×16	95
22	6.3×11	70	6.3×11	80	8×11.5	95	10×12.5	130	10×16	140	10×20	155
33	6.3×11	90	8×11.5	120	10×12.5	140	10×16	175	10×20	190	12.5×20	220
47	8×11.5	125	8×11.5	140	10×12.5	170	10×16	210	10×20	225	12.5×25	285
100	10×12.5	215	10×16	270	10×20	295	12.5×20	380	12.5×25	415	16×25	485
220	10×20	385	12.5×20	505	12.5×25	550	16×25	720	16×31.5	785	18×40	930
330	12.5×20	545	12.5×25	675	16×25	785	16×31.5	965	16×35.5	1010	—	—
470	12.5×25	710	16×25	940	16×31.5	1030	16×35.5	1210	18×35.5	1295	—	—
1000	16×31.5	1315	16×35.5	1575	18×35.5	1690	18×40	1985	—	—	—	—
2200	18×40	2150	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85℃, 120Hz.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

ROB MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS FOR AUDIO

ELNA®

Miniature Standard Capacitors for Audio

GREEN CAP | For Audio

TONEREX

- Adopting the newly developed formation method and composite electrolytic paper for audio application has reduced distortion, achieving high-quality sound.
- All lead wires are oxygen-free copper wires to reduce distortion.

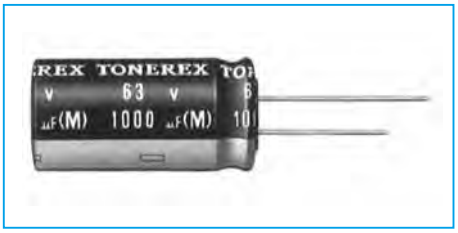

Marking color : Gold print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 4 whichever is larger (after 5 minutes) C : Rated capacitance (μF) ; V: Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 6.3, 10, 16, 25, 35, 50, 63, 100 tanδ (max.): 0.24, 0.20, 0.16, 0.14, 0.12, 0.10, 0.09, 0.08 0.02 is added to every 1000μF increase over 1000μF (20℃,120Hz)
Endurance (85℃) (Applied ripple current)	Test time: 1000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 150% or less of the initial specified value
Shelf life (85℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

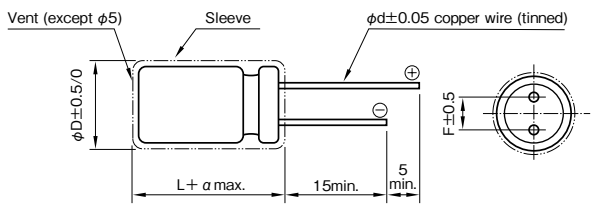

φD	5	6.3	8	10	12.5	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.6	0.6	0.6	0.6	0.8	0.8	0.8
α	1.5			2.0 (φ10,16L or less : 1.5)			

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V)	Frequency (Hz) / CV (μF×WV)	50・60	120	1k	10k	100k
6.3 to 16	All CV value	0.8	1	1.1	1.2	1.2
25 to 35	≤1000	0.8	1	1.5	1.7	1.7
	1000<	0.8	1	1.2	1.3	1.3
50 to 100	≤1000	0.8	1	1.6	1.9	1.9
	1000<	0.8	1	1.2	1.3	1.3

Part numbering system (example : 25V100μF)

ROB	—	25	V	101	M	G3	#	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping (Forming) symbol

Case symbol

Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol
5×11	E3	10×12.5	H3	12.5×20	I5	16×31.5	J7
6.3×11	F3	10×16	H4	12.5×25	I6	16×35.5	J8
8×11.5	G3	10×20	H5	16×25	J6	18×35.5	K8
						18×40	K9

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3 Case φD×L (mm)	6.3 Rated ripple current (mArms)	10 Case φD×L (mm)	10 Rated ripple current (mArms)	16 Case φD×L (mm)	16 Rated ripple current (mArms)	25 Case φD×L (mm)	25 Rated ripple current (mArms)	35 Case φD×L (mm)	35 Rated ripple current (mArms)	50 Case φD×L (mm)	50 Rated ripple current (mArms)	63 Case φD×L (mm)	63 Rated ripple current (mArms)	100 Case φD×L (mm)	100 Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	5×11	10	—	—	5×11	15
2.2	—	—	—	—	—	—	—	—	—	—	5×11	20	—	—	5×11	25
3.3	—	—	—	—	—	—	—	—	—	—	5×11	25	—	—	5×11	30
4.7	—	—	—	—	—	—	5×11	25	—	—	5×11	35	5×11	35	6.3×11	40
10	—	—	—	—	5×11	35	5×11	40	5×11	45	5×11	50	6.3×11	60	8×11.5	70
22	—	—	5×11	50	5×11	60	5×11	60	6.3×11	75	6.3×11	80	8×11.5	100	10×12.5	120
33	5×11	55	5×11	65	5×11	70	6.3×11	80	6.3×11	90	8×11.5	110	8×11.5	115	10×16	160
47	5×11	65	5×11	75	6.3×11	95	6.3×11	100	8×11.5	120	8×11.5	130	10×12.5	165	10×20	210
100	6.3×11	110	6.3×11	120	8×11.5	150	8×11.5	165	10×12.5	210	10×16	250	10×20	285	12.5×20	340
220	8×11.5	185	8×11.5	200	10×12.5	265	10×16	310	10×20	365	12.5×20	440	12.5×20	470	16×25	620
330	10×12.5	265	10×12.5	290	10×16	350	10×20	410	12.5×20	500	12.5×20	540	12.5×25	620	16×31.5	820
470	10×12.5	315	10×16	380	10×20	460	12.5×20	550	12.5×25	640	16×25	800	16×25	840	18×35.5	1000
1000	10×20	550	12.5×20	670	12.5×25	810	16×25	1000	16×25	1050	16×31.5	1200	18×35.5	1500	—	—
2200	12.5×25	980	16×25	1200	16×25	1350	16×35.5	1650	18×35.5	1900	—	—	—	—	—	—
3300	16×25	1300	16×31.5	1600	16×35.5	1800	18×40	2100	—	—	—	—	—	—	—	—
4700	16×31.5	1700	16×35.5	1900	18×35.5	2400	—	—	—	—	—	—	—	—	—	—
6800	16×35.5	2100	18×40	2600	—	—	—	—	—	—	—	—	—	—	—	—
10000	18×40	2800	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85℃, 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Miniature Capacitors for Audio (PURECAP)

GREEN CAP | For Audio

- A standard capacitor utilizing a newly developed material for a high grade of audio reproduction.
- All lead wires are copper plated steel wires.
- New type miniaturized capacitor for audio, using synthetic mica paper for the separator.

New type

RFO ⇦ RA2

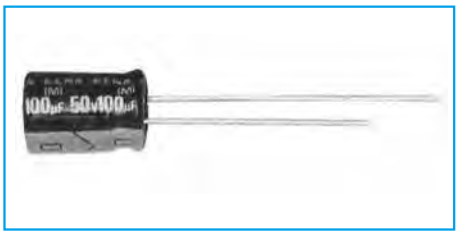

Marking color : Gold print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 6.3, 10, 16, 25, 35, 50, 63, 100 tanδ (max.): 0.22, 0.19, 0.16, 0.14, 0.12, 0.10, 0.09, 0.08 0.02 is added to every 1000μF increase over 1000μF (20℃,120Hz)
Endurance (85℃) (Applied ripple current)	Test time: 1000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 150% or less of the initial specified value
Shelf life (85℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

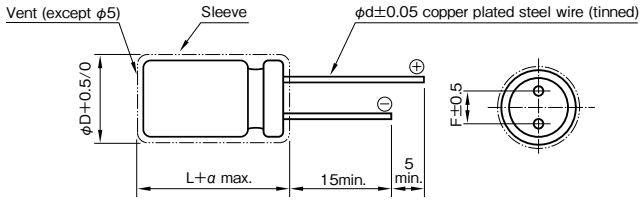

ϕD	5	6.3	8	10	12.5	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
ϕd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
α	1.5			2.0 (ϕ10,16L or less : 1.5)			

Coefficient of Frequency for Rated Ripple Current

Rated voltage(V)	CV(μFxWV) \ Frequency(Hz)	50・60	120	1k	10k	100k
6.3 to 16	All CV value	0.8	1	1.1	1.2	1.2
25 to 35	≤1000	0.8	1	1.5	1.7	1.7
	1000<	0.8	1	1.2	1.3	1.3
50 to 100	≤1000	0.8	1	1.6	1.9	1.9
	1000<	0.8	1	1.2	1.3	1.3

Part numbering system (example : 25V100μF)

RFO	—	25	V	101	M	F3	P#	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping (Forming) symbol

Case symbol

Case ϕD×L (mm)	Casing Symbol	Case ϕD×L (mm)	Casing Symbol	Case ϕD×L (mm)	Casing Symbol	Case ϕD×L (mm)	Casing Symbol
5×11	E3	10×12.5	H3	12.5×20	I5	16×31.5	J7
6.3×11	F3	10×16	H4	12.5×25	I6	18×35.5	K8
8×11.5	G3	10×20	H5	16×25	J6		

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3 Case ϕD×L (mm)	6.3 Rated ripple current (mArms)	10 Case ϕD×L (mm)	10 Rated ripple current (mArms)	16 Case ϕD×L (mm)	16 Rated ripple current (mArms)	25 Case ϕD×L (mm)	25 Rated ripple current (mArms)	35 Case ϕD×L (mm)	35 Rated ripple current (mArms)	50 Case ϕD×L (mm)	50 Rated ripple current (mArms)	63 Case ϕD×L (mm)	63 Rated ripple current (mArms)	100 Case ϕD×L (mm)	100 Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	5×11	15	—	—	5×11	15
2.2	—	—	—	—	—	—	—	—	—	—	5×11	20	—	—	5×11	25
3.3	—	—	—	—	—	—	—	—	—	—	5×11	25	—	—	5×11	30
4.7	—	—	—	—	—	—	—	—	5×11	30	5×11	30	5×11	35	5×11	35
10	—	—	—	—	—	—	—	—	5×11	45	5×11	45	5×11	50	6.3×11	60
22	—	—	—	—	5×11	50	5×11	55	5×11	60	5×11	70	6.3×11	85	8×11.5	110
33	—	—	5×11	55	5×11	60	5×11	70	5×11	80	6.3×11	100	6.3×11	100	10×12.5	160
47	—	—	5×11	65	5×11	75	5×11	85	6.3×11	110	6.3×11	120	8×11.5	150	10×16	210
100	5×11	85	5×11	95	6.3×11	120	6.3×11	140	8×11.5	190	8×11.5	210	10×12.5	260	12.5×20	380
220	6.3×11	150	6.3×11	165	8×11.5	220	8×11.5	250	10×12.5	330	10×16	400	10×20	460	16×25	720
330	6.3×11	180	8×11.5	240	8×11.5	270	10×12.5	370	10×16	450	10×20	540	12.5×20	650	16×25	880
470	8×11.5	260	8×11.5	280	10×12.5	390	10×16	480	10×20	590	12.5×20	740	12.5×25	850	16×31.5	1150
1000	10×12.5	450	10×16	540	10×20	680	12.5×20	880	12.5×25	1050	16×25	1350	16×31.5	1550	—	—
2200	12.5×20	890	12.5×20	970	12.5×25	1200	16×25	1550	16×31.5	1750	18×35.5	2100	—	—	—	—
3300	12.5×20	1050	12.5×25	1250	16×25	1600	16×31.5	1950	18×35.5	2250	—	—	—	—	—	—
4700	16×25	1550	16×25	1650	16×31.5	2050	18×35.5	2500	—	—	—	—	—	—	—	—
6800	16×25	1750	16×31.5	2050	18×35.5	2550	—	—	—	—	—	—	—	—	—	—
10000	16×31.5	2150	18×35.5	2550	—	—	—	—	—	—	—	—	—	—	—	—
15000	18×35.5	2700	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85℃, 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

RA3 MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS FOR AUDIO

ELNA®

Miniature Capacitors for Audio

GREEN CAP | For Audio

- With the same size as that for Series RE3 miniaturized standard capacitors, a high resolution sound quality grade has been realized.
- The newly developed audio use material makes clear sound a reality.
- All lead wires are copper plated steel wires.

Miniaturized

RA3 ⇦ RA2

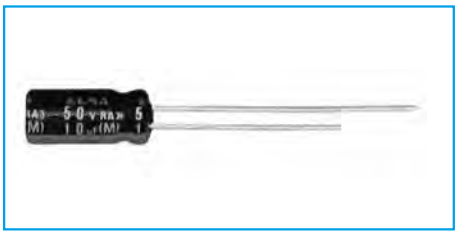

Marking color : White print on a brown sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	

Rated voltage (V)	6.3	10	16	25	35	50	63	100
tanδ (max.)	0.28	0.24	0.20	0.16	0.14	0.12	0.11	0.10

0.02 is added to every 1000μF increase over 1000μF (20℃,120Hz)

Endurance (85℃) (Applied ripple current)	
Test time	2000 hours
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	200% or less of the initial specified value

Shelf life (85℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

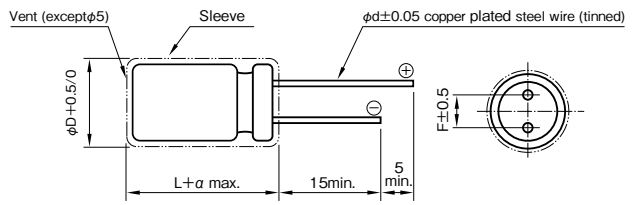

φD	5	6.3	8	10	12.5	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.5	0.5/0.6	0.6	0.6	0.6	0.8	0.8
α	1.5			2.0 (φ10,16L or less : 1.5)			

Coefficient of Frequency for Rated Ripple Current

Rated voltage(V)	CV (μF×WV) \ Frequency (Hz)	50・60	120	1k	10k	100k
6.3 to 16	All CV value	0.8	1	1.1	1.2	1.2
25 to 35	≤1000	0.8	1	1.5	1.7	1.7
	1000<	0.8	1	1.2	1.3	1.3
50 to 100	≤1000	0.8	1	1.6	1.9	1.9
	1000<	0.8	1	1.2	1.3	1.3

Part numbering system (example : 25V100μF)

RA3	—	25	V	101	M	F3	#8	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping (Forming) symbol

Case symbol

Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol
5×11	E3	10×12.5	H3	12.5×20	I5	16×31.5	J7
6.3×11	F3	10×16	H4	12.5×25	I6	18×35.5	K8
8×11.5	G3	10×20	H5	16×25	J6	—	—

Standard Ratings

Rated voltage (V) / Item / Rated capacitance (μF)	6.3 Case φD×L (mm)	6.3 Rated ripple current (mArms)	10 Case φD×L (mm)	10 Rated ripple current (mArms)	16 Case φD×L (mm)	16 Rated ripple current (mArms)	25 Case φD×L (mm)	25 Rated ripple current (mArms)	35 Case φD×L (mm)	35 Rated ripple current (mArms)	50 Case φD×L (mm)	50 Rated ripple current (mArms)	63 Case φD×L (mm)	63 Rated ripple current (mArms)	100 Case φD×L (mm)	100 Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	5×11	21	—	—	5×11	21
2.2	—	—	—	—	—	—	—	—	—	—	5×11	31	—	—	5×11	31
3.3	—	—	—	—	—	—	—	—	—	—	5×11	38	—	—	5×11	40
4.7	—	—	—	—	—	—	—	—	—	—	5×11	45	—	—	5×11	50
10	—	—	—	—	5×11	50	5×11	55	5×11	60	5×11	66	5×11	70	5×11	70
22	—	—	—	—	5×11	75	5×11	90	5×11	95	5×11	100	5×11	105	6.3×11	115
33	—	—	—	—	5×11	110	5×11	110	5×11	110	5×11	110	6.3×11	130	8×11.5	158
47	—	—	—	—	5×11	130	5×11	130	5×11	130	6.3×11	155	6.3×11	160	8×11.5	188
100	5×11	130	5×11	150	5×11	180	6.3×11	199	6.3×11	214	8×11.5	250	8×11.5	270	10×16	358
220	5×11	240	6.3×11	250	6.3×11	280	8×11.5	349	8×11.5	350	10×12.5	429	10×16	505	12.5×20	663
330	6.3×11	300	6.3×11	330	8×11.5	383	8×11.5	383	10×12.5	542	10×16	595	10×20	676	12.5×25	886
470	6.3×11	380	8×11.5	417	8×11.5	480	10×12.5	545	10×16	664	12.5×20	887	12.5×20	924	16×25	1230
1000	8×11.5	580	10×12.5	650	10×16	791	10×20	996	12.5×20	1210	12.5×25	1400	16×25	1710	18×35.5	2210
2200	10×16	939	10×20	1080	12.5×20	1350	12.5×25	1660	16×25	1950	16×31.5	2340	18×35.5	2870	—	—
3300	10×20	1230	12.5×20	1430	12.5×25	1690	16×25	2030	16×31.5	2320	18×35.5	2810	—	—	—	—
4700	12.5×20	1710	12.5×25	1780	16×25	2100	16×31.5	2650	18×35.5	2990	—	—	—	—	—	—
6800	12.5×25	1930	16×25	2270	16×31.5	2480	18×35.5	3290	—	—	—	—	—	—	—	—
10000	16×25	2450	16×31.5	2500	18×35.5	3130	—	—	—	—	—	—	—	—	—	—
15000	16×31.5	2580	18×35.5	3100	—	—	—	—	—	—	—	—	—	—	—	—
22000	18×35.5	3150	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85℃, 120Hz

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

105℃ Miniature Capacitors for Audio

GREEN CAP | 105℃ 1000hours | For Audio

- With the same size as that for Series RJ5 miniaturized standard capacitors, a high resolution sound quality grade has been realized.
- Guarantees 1000 hours at 105℃

High temperature

RW5 ⇦ RA3

Marking color : Gold print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−55 to +105
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leekage current (μA) (max.)	0.03CV or 4 whichever is larger (after 1 minutes) C : Rated capacitance (μF) , V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 16 / 25 tanδ (max.): 0.24 / 0.20 0.02CV is added to every 1000μF increase over 1000μF (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 16 / 25 Impedance ratio (max.) Z−25℃/Z+20℃: 3 / 2 Impedance ratio (max.) Z−40℃/Z+20℃: 6 / 4 (120Hz)
Endurance (105℃) (Applied ripple current)	Test time: 1000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 200% or less of the initial specified value
Shelf life (105℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standerds	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

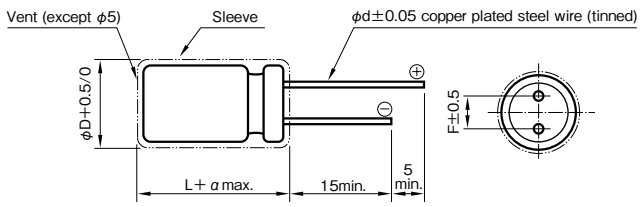

φD	5	6.3	8	10	12.5	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
α	1.0	1.0	1.0	2.0	2.0	2.0	2.0

Coefficient of Frequency for Rated Ripple Current

Rated Capacitance (μF) \ Frequency (Hz)	50・60	120	1k	10k	100k
100 to 220	0.8	1	1.2	1.3	1.4
330 to 1000	0.8	1	1.2	1.2	1.3
2200 to 15000	0.8	1	1.1	1.1	1.1

Part numbering system (example : 16V3300μF)

RW5	—	16	V	332	M	I6	#	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping (Forming) symbol

Standard Ratings

Rated capacitance (μF) \ Rated voltage (V) / Item	16 Case φD×L (mm)	16 Casing symbol	16 Rated ripple current (mArms)	25 Case φD×L (mm)	25 Casing symbol	25 Rated ripple current (mArms)
100	—	—	—	5×11.5	E3	125
220	6.3×11.5	F3	190	6.3×11.5	F3	200
330	6.3×11.5	F3	225	8×12	G3	310
470	8×12	G3	323	10×12.5	H3	429
1000	10×12.5	H3	500	10×16	H4	610
2200	10×20	H5	710	12.5×25	I6	1180
				16×20	J5	1230
				18×16	K4	1200
3300	12.5×25	I6	1200	16×25	J6	1440
	16×20	J5	1250	18×20	K5	1400
4700	16×25	J6	1500	16×25	J6	1570
	18×20	K5	1460	18×20	K5	1530
6800	16×25	J6	1600	16×35.5	J8	1850
	18×20	K5	1560	18×31.5	K7	1870
10000	16×35.5	J8	1930	18×40	K9	2000
15000	18×40	K9	2210	—	—	—

(Note) Rated ripple current : 105℃, 120Hz.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Miniature Bipolar Capacitors for Audio

GREEN CAP | For Audio

- The newly developed audio use foil and special electrolyte makes clear and far-carrying sound a reality.
- All lead wires are copper plated steel wires.

Tone quality improvements

RBD ⇦ R2B

Marking color : Gold print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.03CV + 3 (after 5 minutes) C : Rated capacitance (μF); V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	
Characteristics at high and low temperature	
Endurance (85℃) (Applied ripple current)	
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Tangent of loss angle (tanδ):

Rated voltage (V)	6.3	10	16	25	35	50	63	100
tanδ (max.)	0.24	0.20	0.16	0.15	0.14	0.12	0.10	0.09

0.02 is added to every 1000μF increase over 1000μF. (20℃,120Hz)

Characteristics at high and low temperature:

Rated voltage (V)		6.3	10	16	25	35	50	63	100
Impedance ratio (max.)	Z−25℃/Z+20℃	4	3	2	2	2	2	2	2
	Z−40℃/Z+20℃	10	8	6	4	3	3	3	3

0.5 for −25°C, 1 for −40°C are added to every 1000μF increase over 1000μF. (120Hz)

Endurance (85℃) (Applied ripple current):

Test time	2000 hours (with the polarity inverted every 250 hours)
Leakage current	The initial specified value or less
Percentage of capacitance change	Within ±20% of initial value
Tangent of the loss angle	150% or less of the initial specified value

Outline Drawing

Unit : mm

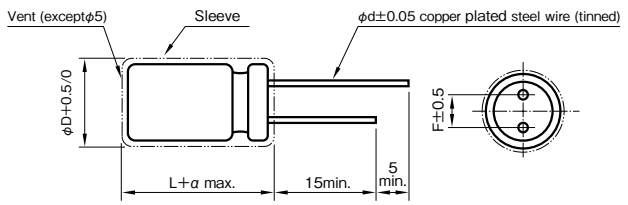

φD	5	6.3	8	10	12.5	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
α	1.5			2.0 (φ10,16L or less : 1.5)			

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50・60	120	1k	10k・100k
6.3 to 16	0.8	1	1.1	1.2
25 to 35	0.8	1	1.5	1.7
50 to 100	0.8	1	1.6	1.9

Part numbering system (example : 10V1000μF)

RBD	—	10	V	102	M	I5	#	—	⬚
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol			Taping (Forming) symbol

Case symbol

Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol	Case φD×L (mm)	Casing Symbol
5×11	E3	10×12.5	H3	12.5×20	I5	16×31.5	J7
6.3×11	F3	10×16	H4	12.5×25	I6	18×35.5	K8
8×11.5	G3	10×20	H5	16×25	J6	—	—

Standard Ratings

Rated voltage (V) / Item: Rated capacitance (μF)	6.3 Case φD×L (mm)	6.3 Rated ripple current (mArms)	10 Case φD×L (mm)	10 Rated ripple current (mArms)	16 Case φD×L (mm)	16 Rated ripple current (mArms)	25 Case φD×L (mm)	25 Rated ripple current (mArms)	35 Case φD×L (mm)	35 Rated ripple current (mArms)	50 Case φD×L (mm)	50 Rated ripple current (mArms)	63 Case φD×L (mm)	63 Rated ripple current (mArms)	100 Case φD×L (mm)	100 Rated ripple current (mArms)
1	—	—	—	—	—	—	—	—	—	—	5×11	14	—	—	5×11	16
2.2	—	—	—	—	—	—	—	—	—	—	5×11	21	5×11	23	5×11	24
3.3	—	—	—	—	—	—	—	—	—	—	5×11	26	5×11	28	6.3×11	34
4.7	—	—	—	—	—	—	5×11	28	5×11	28	5×11	31	5×11	34	6.3×11	41
10	—	—	—	—	5×11	39	5×11	40	5×11	42	5×11	45	6.3×11	57	8×11.5	70
22	—	—	5×11	52	5×11	58	5×11	60	6.3×11	71	6.3×11	77	8×11.5	89	10×16	136
33	5×11	58	5×11	63	5×11	71	6.3×11	84	6.3×11	87	8×11.5	111	10×12.5	144	10×20	181
47	5×11	69	5×11	75	6.3×11	97	6.3×11	100	8×11.5	122	10×12.5	157	10×16	188	12.5×20	248
100	6.3×11	115	6.3×11	126	8×11.5	167	10×12.5	204	10×12.5	212	10×20	273	12.5×20	343	16×25	458
220	8×11.5	202	8×11.5	221	10×12.5	294	10×16	332	10×20	375	12.5×25	506	16×25	645	18×35.5	837
330	8×11.5	247	10×12.5	322	10×16	394	10×20	444	12.5×20	526	12.5×25	620	—	—	—	—
470	10×12.5	350	10×16	420	10×20	513	12.5×20	607	12.5×25	685	16×25	861	—	—	—	—
1000	10×20	611	12.5×20	767	12.5×25	935	16×25	1120	16×31.5	1270	—	—	—	—	—	—
2200	12.5×25	1090	16×25	1380	16×31.5	1660	—	—	—	—	—	—	—	—	—	—
3300	16×25	1490	16×31.5	1760	—	—	—	—	—	—	—	—	—	—	—	—
4700	16×31.5	1880	18×35.5	2280	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85℃, 120Hz

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Power Supply Smoothing Use,Standard Capacitors for Audio

GREEN CAP | For Audio

- Best suited as power supply filters for sound quality priority audio equipment.
- Printed circuit board terminal snap-in type.

For audio

LAO ⇦ LA5

Marking color : Gold print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	±20 (20℃,120Hz)
Leakage current (μA) (max.)	0.03CV or 5mA whichever is larger (after 5 minutes) C : Rated capacitance (μF), V : Rated voltage (V) (20℃)
Tangent of loss angle (tanδ)	Rated voltage (V): 16, 25 / 35 / 50 to 100 tanδ (max.): 0.40 / 0.35 / 0.30 (20℃,120Hz)
Characteristics at high and low temperature	Rated voltage (V): 16 to 35 / 50 to 100 Impedance ratio (max.) Z−25℃/Z+20℃: 4 / 3 Impedance ratio (max.) Z−40℃/Z+20℃: 15 / 10 (120Hz)
Endurance (85℃) (Applied ripple current)	Test time: 1000 hours Leakage current: The initial specified value or less Percentage of capacitance change: Within ±20% of initial value Tangent of the loss angle: 150% or less of the initial specified value
Shelf life (85℃)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1
Applicable standards	JIS C5101-1, -4 (IEC 60384-1, -4)

Outline Drawing

Unit : mm

Printed circuit board snap-in type (Series LAO)

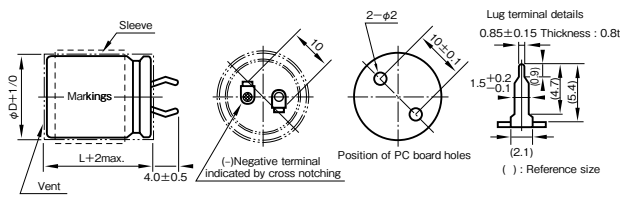

Coefficient of Frequency for Rated Ripple Current

Rated voltage (V) \ Frequency (Hz)	50	120	1k	10k	20k
16 to 50	0.95	1	1.10	1.15	1.15
63 to 100	0.95	1	1.16	1.30	1.33

Part numbering system (example : 63V6800μF)

LAO	—	63	V	682	M	S57	PX #	B
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Optional symbol

Standard Ratings

Case φD×L (mm)	Casing symbol	16 Rated capacitance (μF)	16 Rated ripple current (Arms)	25 Rated capacitance (μF)	25 Rated ripple current (Arms)	35 Rated capacitance (μF)	35 Rated ripple current (Arms)	50 Rated capacitance (μF)	50 Rated ripple current (Arms)	63 Rated capacitance (μF)	63 Rated ripple current (Arms)	80 Rated capacitance (μF)	80 Rated ripple current (Arms)	100 Rated capacitance (μF)	100 Rated ripple current (Arms)
22×20	S21	3300	1.2	—	—	—	—	—	—	—	—	—	—	—	—
22×25	S22	4700	1.5	2200	1.0	1500	0.8	1000	0.8	680	0.7	—	—	—	—
22×30	S23	—	—	3300	1.3	2200	1.3	1500	1.1	1000	0.9	680	0.7	—	—
22×35	S24	6800	2.0	4700	1.7	3300	1.7	—	—	1500	1.2	1000	1.0	680	0.8
22×40	S25	—	—	—	—	—	—	2200	1.5	—	—	—	—	—	—
22×45	S26	10000	2.7	6800	2.2	4700	2.3	—	—	2200	1.6	—	—	—	—
22×50	S27	—	—	—	—	—	—	3300	2.0	—	—	1500	1.3	1000	1.2
25×25	S32	—	—	3300	1.7	2200	1.7	1500	1.4	1000	1.2	680	1.0	—	—
25×30	S33	6800	2.5	4700	2.1	3300	2.2	2200	1.8	1500	1.5	1000	1.2	680	1.1
25×35	S34	10000	3.2	—	—	—	—	—	—	—	—	—	—	—	—
25×40	S35	—	—	6800	2.7	4700	2.8	3300	2.3	2200	1.9	1500	1.6	1000	1.4
25×45	S36	—	—	—	—	—	—	—	—	—	—	—	—	—	—
25×50	S37	—	—	10000	3.0	6800	2.6	4700	2.4	3300	2.0	2200	2.0	1500	1.8
30×25	S42	6800	2.6	4700	2.2	3300	2.3	2200	1.9	1500	1.6	1000	1.3	680	1.1
30×30	S43	10000	3.3	6800	2.7	4700	2.8	3300	2.4	2200	1.9	1500	1.6	1000	1.4
30×35	S44	—	—	—	—	—	—	—	—	—	—	—	—	—	—
30×40	S45	—	—	10000	3.1	6800	2.7	4700	2.4	3300	2.1	2200	2.1	1500	1.8
30×45	S46	—	—	—	—	—	—	—	—	—	—	—	—	—	—
30×50	S47	—	—	—	—	10000	3.4	6800	3.1	4700	2.6	3300	2.2	2200	1.8
35×25	S52	10000	3.4	6800	2.8	4700	2.9	3300	2.4	2200	2.0	1500	1.7	1000	1.5
35×30	S53	—	—	10000	3.1	6800	2.7	4700	2.5	3300	2.1	2200	2.1	1500	1.8
35×35	S54	—	—	—	—	—	—	—	—	—	—	—	—	—	—
35×40	S55	—	—	—	—	10000	3.5	6800	3.1	4700	2.6	3300	2.2	2200	1.8
35×45	S56	—	—	—	—	—	—	—	—	—	—	—	—	—	—
35×50	S57	—	—	—	—	—	—	—	—	6800	3.3	4700	2.7	—	—

(Note) Rated ripple current : 85℃, 120Hz.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

1 General Description of Aluminum Electrolytic Capacitors

1-1 The Principle of Capacitor

The principle of capacitor can be presented by the principle drawing as in Fig.1-1.

When a voltage is applied between the metal electrodes placed opposite on both surfaces of a dielectric, electric charge can be stored proportional to the voltage.

$Q = C \cdot V$

Q : Quantity of electricity (C)

V : Voltage (V)

C : Capacitance (F)



Fig.1-1

C. called the capacitance of capacitor, is expressed by the following expression with the electrode area S[m²], the electrode spacing t [m] and the dielectric constant of dielectric " ε ":

$$C[F] = \varepsilon 0 \cdot \varepsilon \cdot \frac{S}{t}$$

ε0 : Dielectric constant in vacuum ($=8.85\times10^{-12}$F/m)

The dielectric constant of an aluminum oxide film is 7 to 8. Larger capacitances can be obtained by enlarging the electrode area S or reducing t.

Table 1-1 shows the dielectric constants of typical dielectrics used in the capacitor. In many cases, capacitor names are determined by the dielectric material used, for example, aluminum electrolytic capacitor, tantalum capacitor, etc.

Table 1

Dielectric	Dielectric Constant	Dielectric	Dielectric Constant
Aluminum oxide film	7 to 8	Porcelain (ceramic)	10 to 120
Mylar	3.2	Polystyrene	2.5
Mica	6 to 8	Tantalum oxide film	10 to 20

Although the aluminum electrolytic capacitor is small, it has a large capacitance. It is because the electrode area is roughened by electrochemical etching, enlarging the electrode area and also because the dielectric is very thin.

The schematic cross section of the aluminum electrolytic capacitor is as in Fig.1-2.

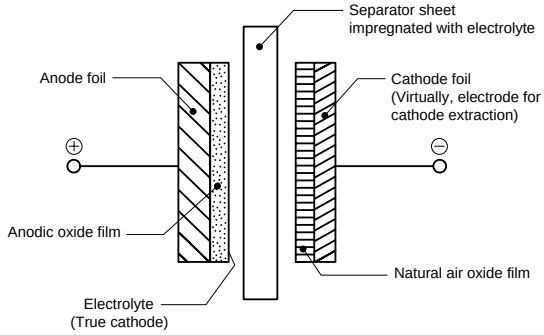

Fig.1-2

1-2 Equivalent Circuit of the Capacitor

The electrical equivalent circuit of the aluminum electrolytic capacitor is as presented in the following figure.

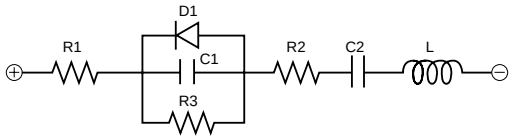

R1 : Resistance of terminal and electrode

R2 : Resistances of anodic oxide film and electrolyte

R3 : Insulation resistance because of defective anodic oxide film

D1 : Oxide semiconductor of anode foil

C1 : Capacity of anode foil

C2 : Capacity of cathode foil

L : Inductance caused by terminals, electrodes, etc.

2 About the Life of an Aluminum Electrolytic Capacitor

2-1 Estimation of life with minimal ripple current (negligible).

Generally, the life of an aluminum electrolytic capacitor is closely related with its ambient temperature and the life will be approximately the same as the one obtained by Arrhenius' equation.

$$L = L_0 \times 2^{\left(\frac{T_0 - T}{10}\right)} \quad \text{.....(1)}$$

Where L : Life at temperature T

L_0 : Life at temperature T_0

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

2-2 Estimation of life considering the ripple current.

The ripple current affects the life of a capacitor because the internal loss (ESR) generates heat. The generated heat will be :

$$P = I^2R \quad \text{.....(2)}$$

Where I : Ripple current (Arms)
R : ESR (Ω)

With increase in the temperature of the capacitor:

$$\Delta T = \frac{I^2 \times R}{A \times H} \quad \text{.....(3)}$$

Where ΔT : Temperature increase in the capacitor core(deg.)
I : Ripple current (Arms)
R : ESR (Ω)
A : Surface area of the capacitor (cm^2)
H : Radiation coefficient (Approx. 1.5 to 2.0 $\times 10^{-3} W/cm^2 \times ℃$)

The above equation (3) shows that the temperature of a capacitor increases in proportion to the square of the applied ripple current and ESR, and in inverse proportion to the surface area. Therefore, the amount of the ripple current determines the heat generation, which affects the life. The value of ΔT varies depending on the capacitor types and operating conditions. The usage is generally desirable if ΔT remains less than 5℃. The measuring point for temperature increase due to ripple current is shown below ;



Test results:

(1) The life equation considering the ambient temperature and the ripple current will be :

$$L = Ld \times 2^{\left(\frac{T_0 - T}{10}\right)} \times K^{\left(\frac{-\Delta T}{10}\right)} \quad \text{.....(4)}$$

Where Ld : Life at DC operation (h)
K : Ripple acceleration factor
(K=2, within allowable ripple current)
(K=4, if exceeding allowable ripple current)
T_0 : Upper category temperature (℃)
T : Operating temperature (℃)
ΔT : Temperature increase at capacitor core (deg.)

(2) The life equation based on the life with the rated ripple current applied under the maximum guaranteed temperature will be a conversion of the above equation (4), as below :

$$L = Lr \times 2^{\left(\frac{T_0 - T}{10}\right)} \times K^{\left(\frac{\Delta T_0 - \Delta T}{10}\right)} \quad \text{.....(5)}$$

Where Lr : Life at the upper category temperature with the rated ripple current (h)
ΔT_0 : Temperature increase at capacitor core, at the upper category temperature (deg.)

(3) The life equation considering the ambient temperature and the ripple current will be a conversion of the above equation (5), as below :

$$L = Lr \times 2^{\left(\frac{T_0 - T}{10}\right)} \times K^{\left\{1 - \left(\frac{I}{I_0}\right)^2\right\} \times \frac{\Delta T_0}{10}} \quad \text{.....(6)}$$

Where I_0 : Rated ripple current at the upper category temperature (Arms)
I : Applied ripple current (Arms)

(4)The life equation considering the ambient temperature, ripple current and applied voltage will be the below (7) by adding the effectiveness of the voltage deration.
(Apply to the rated voltage 200V to 500V of LA*, LT*, LJ* series)

$$L = Lr \cdot 2^{\left(\frac{T_0 - T}{10}\right)} \cdot K^{\left\{1 - \left(\frac{I}{I_0}\right)^2\right\} \cdot \frac{\Delta T_0}{10}} \cdot \left(\frac{Vr}{Va}\right)^{2.5} \quad \text{...(7)}$$

Vr : Rated voltage (V)
Va : Applied voltage (V)
Except, when Va/Vr <0.6, fix to Va=Vr x 0.6

ΔT_0 of each category highest temperature

Aluminum Electrolytic Capacitors	85	: 10deg
	105 to 135	: 5deg
	150	: 3deg
Polymer hybrid type aluminum Electrolytic Capacitors	105	: 15deg
	125	: 10deg
	135	: 10deg

Since it is actually difficult to measure the temperature increase at the capacitor core, the following table is provided for conversion from the surface temperature increase to the core temperature increase.

Table 2-1

Case diameter	~10	12.5~16	18	20~22	25	30	35
Core / Surface	1.1	1.2	1.25	1.3	1.4	1.6	1.65

The life expectancy formula shall in principle be applied to the temperature range between the ambient temperature of +40℃ and upper category temperature. The expected life time shall be about fifteen years at maximum as a guide in terms of deterioration of the sealant.

(Fig. 2-1 Life Expectancy Chart)

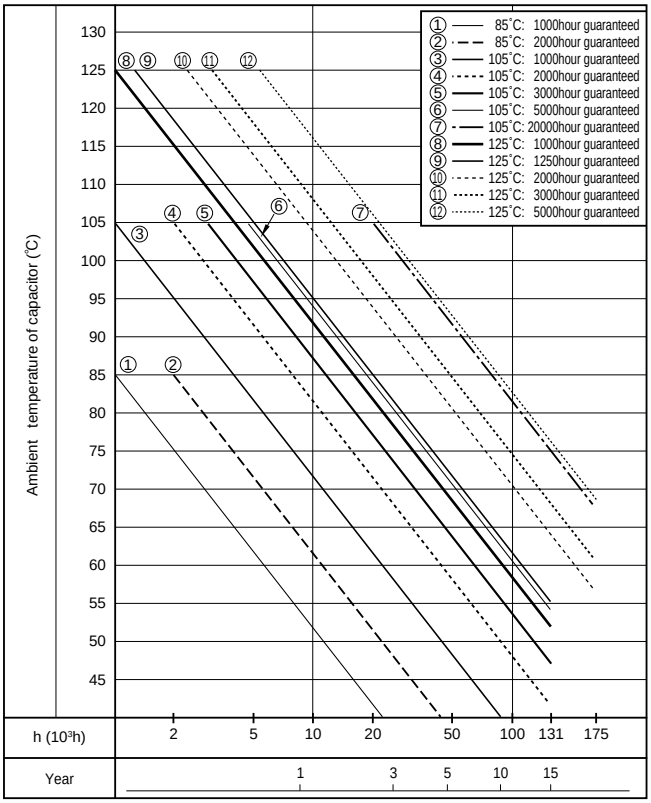

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

2-3 Practical Examples of Life Expectancy

As practical examples of life expectancy, we introduce 250V 560 μ F in the LAT Series considering the effect of high-frequency component. Figures 2-2 to 2-4 show the simulated ripple current waveforms when the high-frequency component for switching is superimposed on the commercial frequency component.



Fig.2-2 Ripple Current Waveform of Capacitor



Fig.2-3 Low-frequency component



Fig.2-4 High-frequency component

Each of the above may be obtained as the effective ripple current value. Assuming that the ripple current waveform of the low-frequency component is generally approximated to the full-wave rectification waveform as shown in Fig.2-3, we obtain the effective ripple current value I_L as follows:

$$I_L = \frac{I_{PL}}{\sqrt{2}} = 0.707 \times I_{PL}$$

Since the ripple current waveform of the high-frequency component is approximated to the rectangular as shown in Fig.2-4, the effective current value of high-frequency component I_H is given by

$$I_H = \sqrt{\frac{1}{T}\int_0^{t_1} I_{PH}^2 d_1} = I_{PH}\sqrt{\frac{t_1}{T}}$$

The reason why the ripple current affects the life is due to the heat generated by the ESR (R) of capacitor.
That is, ΔT by heat generation can be expressed by

$\Delta T \propto I^2 \times R$ from Expression (2).

Therefore, when ripple currents with different frequencies are handled, each current value must first be squared and then summed. That is:

$$I = \sqrt{(I_L)^2 + (I_H)^2}$$

Now, we proceed to specific examples assuming that the effective ripple current values of low-and high-frequencies have been obtained by the above methods.

Data A (Test piece and basic data)

Product name	: 250V 560μF φ 30x30 L, Series LAT
L_r	= 2000 hours
K	= 4
T_0	= 105°C
ΔT_0	= 5deg
I_0	= 1.80Arms at 105°C, 120Hz

To verify the effect of the high-frequency component, the expected life will be calculated for each of three high-frequency ripple current conditions.

Data B

I_L	= 2.4Arms at 120Hz, T=45°C
I_{H1}	= 0.36Arms at 1kHz (corresponding to 15% of the commercial frequency component)
I_{H2}	= 0.72Arms at 10kHz (corresponding to 30% of the commercial frequency component)
I_{H3}	= 1.2Arms at 30kHz (corresponding to 50% of the commercial frequency component)

For Data B, the currents are converted to 120Hz by the frequency conversion factor for the cases of ignorance of the high-frequency component, and each high-frequency component condition.

$$I = 2.4/1 = 2.4A$$

$$I_1 = \sqrt{(2.4)^2 + (0.36/1.32)^2} \fallingdotseq 2.42A$$

$$I_2 = \sqrt{(2.4)^2 + (0.72/1.45)^2} \fallingdotseq 2.45A$$

$$I_3 = \sqrt{(2.4)^2 + (1.2/1.50)^2} \fallingdotseq 2.53A$$

Explained here is about the frequency conversion factor. As described above, the heat generation (or temperature rise = ΔT) affecting the life is proportional to the ESR of capacitor. In addition, the fundamental frequency is 120Hz in measurement of capacitor characteristics, and the ripple current is also specified with this frequency; it is thus more convenient to calculate by converting the current value to that with the same temperature rise at 120Hz.
The ESR of aluminum electrolytic capacitor is frequency dependent.

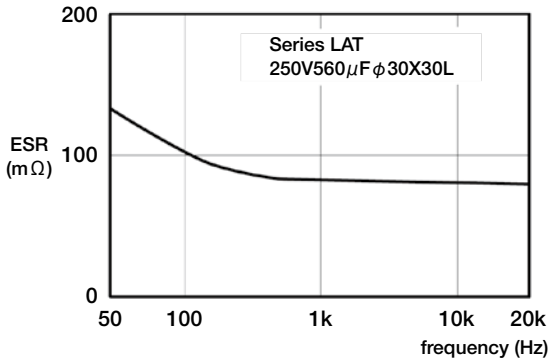

Fig.2-5 Frequency Characteristics of ESR

Figure 2-5 shows a typical example of frequency characteristics of ESR, indicating that the ESR decreases with increasing frequencies. Therefore, the high-frequency component has less effect on the heat generation of capacitor than low-frequency component.
Next, we calculate the expected life according to each condition to compare with the case with no high-frequency component.
For the case with no high-frequency component:

$$L = 2000 \times 2^{\left(\frac{105-45}{10}\right)} \times 4^{\left[1-\left(\frac{2.4}{1.80}\right)^2\right]} \times \frac{5}{10} \fallingdotseq 74{,}658 \text{ hours}$$

For the case with high-frequency component:

$$L = 2000 \times 2^{\left(\frac{105-45}{10}\right)} \times 4^{\left[1-\left(\frac{2.42}{1.80}\right)^2\right]} \times \frac{5}{10} \fallingdotseq 73{,}479 \text{ hours}$$

73,479/74,658=0.984, about a 1.6% reduction in life

$$L = 2000 \times 2^{\left(\frac{105-45}{10}\right)} \times 4^{\left[1-\left(\frac{2.48}{1.80}\right)^2\right]} \times \frac{5}{10} \fallingdotseq 70{,}822 \text{ hours}$$

70,822/74,658=0.949, about a 5.1% reduction in life

$$L = 2000 \times 2^{\left(\frac{105-45}{10}\right)} \times 4^{\left[1-\left(\frac{2.61}{1.80}\right)^2\right]} \times \frac{5}{10} \fallingdotseq 65{,}105 \text{ hours}$$

65,105/74,658=0.872, about a 12.8% reduction in life

As described above, there may be cases where the effect of larger high-frequency component on the life cannot be ignored; thus high-frequency component exceeding 30% with respect to the current with funda-mental frequency should be considered.

3 To calculate Balance when connecting in series

3-1 Circuit layout

Circuit for connecting two capacitors (C1, C2) in series and equivalent circuit can be illustrated as below figure. Formula to calculate a balance resistance R_B of below figure is shown as follows.

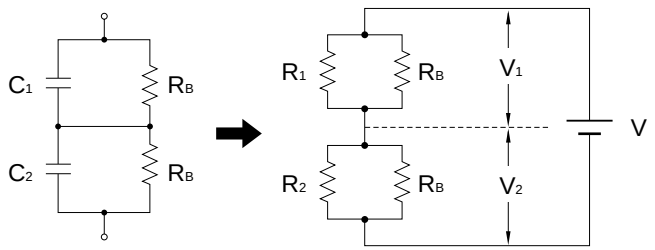

Following are the preconditions of the circuit.

① V_2 shall be the rated voltage ($=V_0$). $(V_1<V_2)$

② V shall be a times $V_0\times 2$. $V=2aV_0$ $(a<1)$

③ R_2 shall equal $R_1\times b$. $(b<1)$ (1)

3-2 Formulas to calculate [R_B]

3-2-1 Following formula can be established from balanced condition.

$$V_1\left[\frac{1}{R_1}+\frac{1}{R_B}\right]=V_2\left[\frac{1}{R_2}+\frac{1}{R_B}\right] \qquad (2)$$

3-2-2 Following formula can be established from preconditions.

$$V_2 \leqq V_0 \qquad (3)$$

$$V_1 = V - V_2 \qquad (4)$$

$$=2aV_0 - V_2 \qquad (4')$$

3-2-3 Put formulas (1), (3) and (4') in formula (2).

$$(2aV_0-V_2)\left[\frac{R_1+R_B}{R_1 \times R_B}\right]=V_2\left[\frac{bR_1+R_B}{bR_1 \times R_B}\right]$$

$$2abV_0(R_1+R_B)=V_2\{b(R_1+R_B)+bR_1+R_B\}$$

$$2ab(R_1+R_B) \leqq 2bR_1+(1+b)R_B$$

Accordingly, balance resistance R shall be the following formula.

$$\boxed{R_B \leqq 2bR_1\frac{(1-a)}{(2a-1)\times b-1}} \qquad (5)$$

3-3 Calculation Example

Calculate the value of the balance resistance in the case of connecting two 400V 470μF (LC standard value : 1.88mA) capacitors in series.

$$R_1=\frac{400(V)}{1.88(mA)}=213(k\Omega)$$

If a=0.8, 400(V)×2×0.8=640(V) as an impressed voltage.

If b=2, $R_2=b\,R_1=426(k\Omega)$, LC=0.94(mA).

Balance resistance R_B will be.

$$R_B \leqq 2\times 2\times 213(k\Omega)\frac{(1-0.8)}{(2\times 0.8)\times 2-1}=852(k\Omega)$$

4 Regarding Recovery Voltage

- After charging and then discharging the aluminum electrolytic capacitor, and further causing short-circuit to the terminals and leave them alone, the voltage between the two terminals will rise again after some interval. Voltage caused in such case is called recovery voltage. Following is the process that causes this phenomenon :
- When the voltage is impressed on a dielectric, electrical transformation will be caused inside the dielectric due to dielectric action, and electrification will occur in positive-negative opposite to the voltage impressed on the surface of the dielectric. This phenomenon is called polarization action.
- After the voltage is impressed with this polarization action, and if the terminals are discharged till the terminal voltage reaches 0 and are left open for a while, an electric potential will arise between the two terminals and thus causes recovery voltage.
- Recovery voltage comes to a peak around 10 to 20 days after the two terminals are left open, and then gradually declines. Recovery voltage has a tendency to become bigger as the component (stand-alone base type) becomes bigger.
- If the two terminals are short-circuited after the recovery voltage is generated, a spark may scare the workers working in the assembly line, and may put low-voltage driven components (CPU, memory, etc.) in danger of being destroyed. Measures to prevent this is to discharge the accumulated electric charge with resistor of about 100 to 1kΩ before using, or ship out by making the terminals in short-circuit condition by covering them with an aluminum foil at the production stage. Please consult us for adequate procedures.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

5 Electrode Foil Development Technology

5-1 Corrosion inhibition of cathode foil

Inactive treatment is implemented to ensure long life by inhibiting natural corrosion of the cathode foil. Fig. 3-1 shows its effects with values of the polarization resistance inversely proportional to the corrosion rate using the AC impedance method (FRA). This indicates that the cathode foil used in the High reliability capacitors has the polarization resistance higher than that of the conventional capacitors owing to corrosion inhibition.

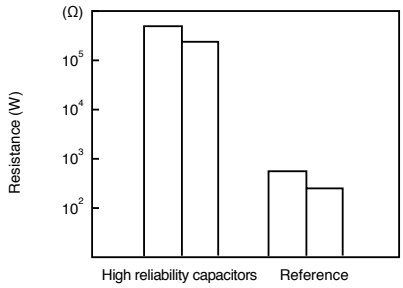

Fig. 3-1

5-2 Sealing material permeability of electrolyte

To ensure long life, a low permeable lactone solvent for the sealing material is used as the main solvent of the electrolyte of the High reliability capacitor. Fig. 3-2 shows the test results on the permeability obtained by changing the weight of the capacitors produced with different types of electrolytes at a high temperature.

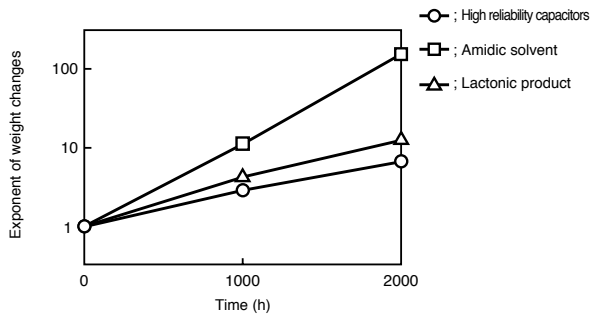

Fig. 3-2

5-3 Airtightness of sealing material

Since the electrolyte is stable for hours, the key element for capacitor's life is the sealing material. By optimizing the crosslinking density of the sealing material polymer, the sealing material of the High reliability capacitor attains its long life with electrolyte permeability less than that of the conventional capacitors.

Fig. 3-3 shows the test results on the airtightness of the sealing material obtained by changing the weight of the capacitors at a high temperature, producing capacitors with the conventional sealing material and improved one both containing the electrolyte used in the High reliability capacitor.

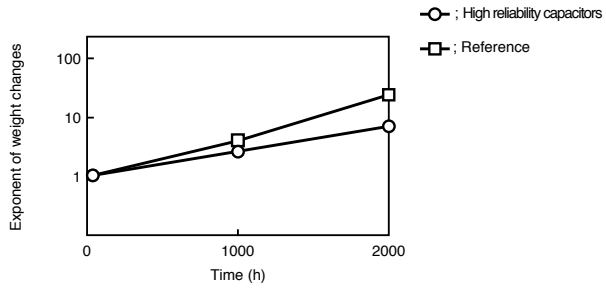

Fig. 3-3

5-4 Long-time stability of electrolyte

The electrolyte used in the High reliability capacitor is stable with low initial resistivity and small secular changes at a high temperature. Fig. 3-4 shows change in resistivity at 105°C.

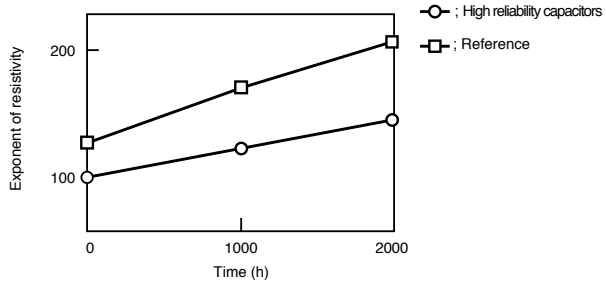

Fig. 3-4

5-5 Dielectric formation voltage and leakage current characteristics of anode foil

To increase the operating life by controlling the gas generation inside capacitor because of 1.5 to 2 times the rated voltage, while that of the previous capacitor is about 1.3 times the rated voltage.

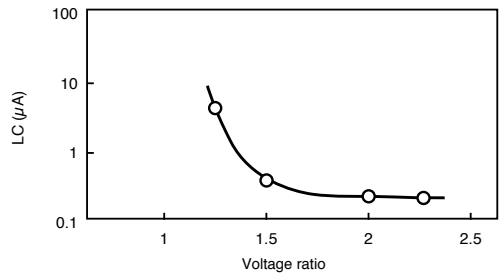

Fig. 3-5

5-6 Lowered ESR of Electrode Foil

To reduce the ESR of electrolytic capacitor, we have improved our chemical conversion technology for anode foil to develop lower ESR electrode foil compared to the conventional product as shown in Fig. 3-6

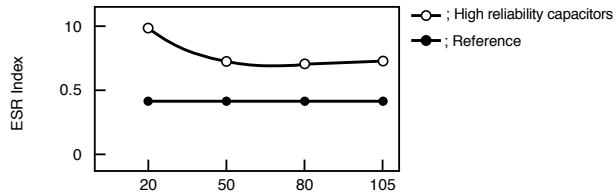

Fig. 3-6 ESR Index of Anode Foil

Electric Characteristics Data

1.CONDUCTIVE POLYMER HYBRID ALUMINUM ELECTROLYTIC CAPACITORS

Series HV (garanteed 105°C) Frequency characteristics at 20°C

	Series	Ratings	Case size
●—	HV	25V330μF	φ10×10 L
—▲	RVD	25V470μF	φ10×10 L

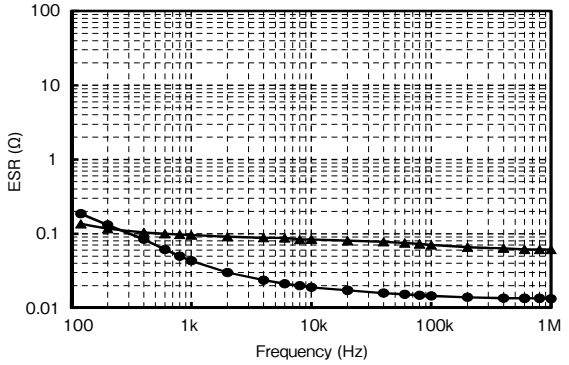

Series HVK (garanteed 125°C) Frequency characteristics at 20°C

	Series	Ratings	Case size
●—	HVK	35V68μF	φ6.3×7.7 L
—▲	RVT	35V100μF	φ6.3×7.7 L

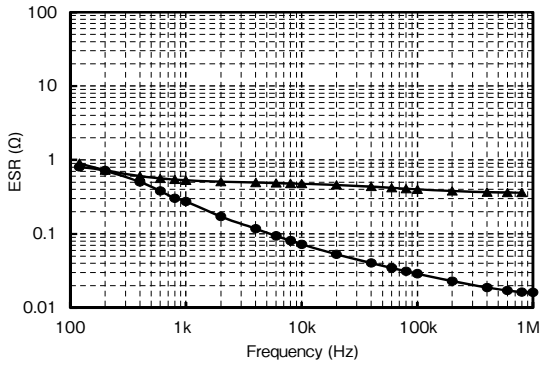

Temperature Characteristics

	Series	Ratings	Case size
●—	HV	25V330μF	φ10×10 L
—▲	RVD	25V470μF	φ10×10 L

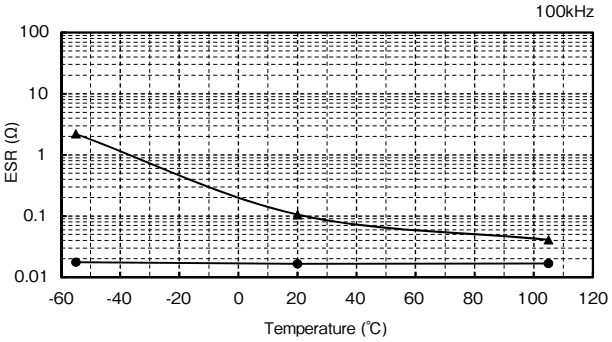

Temperature Characteristics

	Series	Ratings	Case size
●—	HVK	35V68μF	φ6.3×7.7 L
—▲	RVT	35V100μF	φ6.3×7.7 L

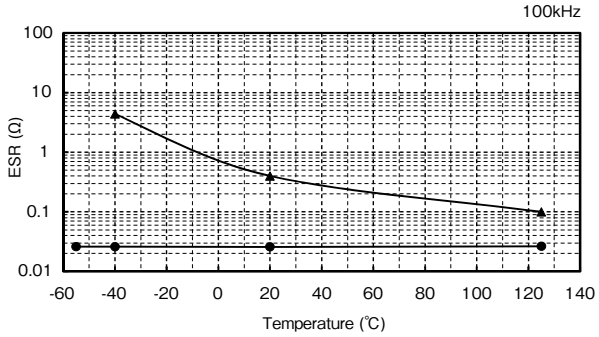

Endurance (Applied ripple current) at 105°C

	Series	Ratings	Case size	Rated ripple current (100kHz)
●—	HV	25V220μF	φ8×10 L	2300mArms
—▲	RVD	25V220μF	φ8×10 L	600mArms

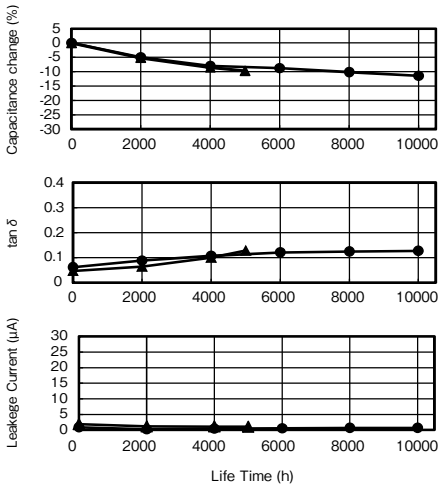

Endurance (Applied ripple current) at 125°C

	Series	Ratings	Case size	Rated ripple current (100kHz)
●—	HVK	35V270μF	φ10×10 L	2000mArms
—▲	RVT	35V220μF	φ10×10 L	500mArms

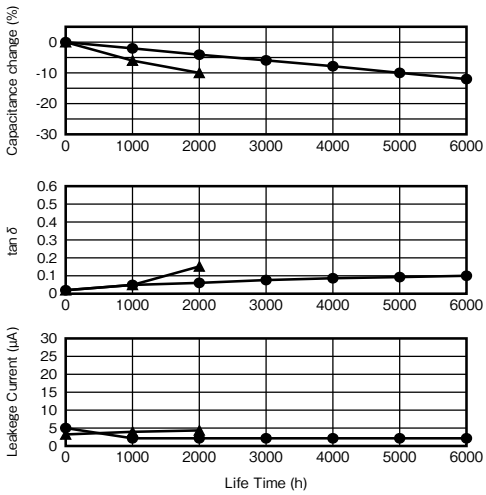

Notice : The measurement values are not guaranteed values, but measurements.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

2.CHIP TYPE ALUMINUM ELECTROLYTIC CAPACITORS

Series RZD (garanteed 105°C)
Frequency characteristics at 20°C

	Series	Ratings	Case size
●—	RZD	25V820μF	φ10×10 L
▲—	RVD	25V470μF	φ10×10 L

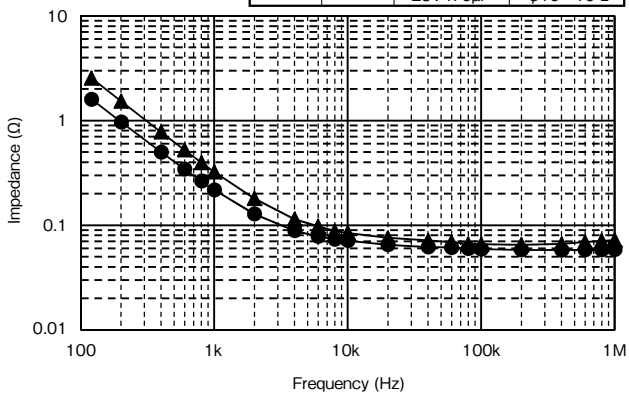

Series RZF (garanteed 125°C)
Frequency characteristics at 20°C

	Series	Ratings	Case size
●—	RZF	35V100μF	φ6.3×7.7 L
▲—	RVT	35V47μF	φ6.3×7.7 L

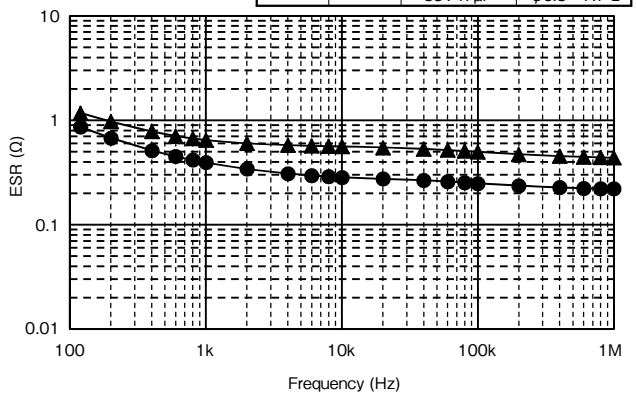

Temperature Characteristics (20°C, −40°C)

	Temperature	Series	Ratings	Case size
●—	20℃	RZD	35V100μF	φ6.3×5.8 L
▲—	−40℃	RZD	35V100μF	φ6.3×5.8 L

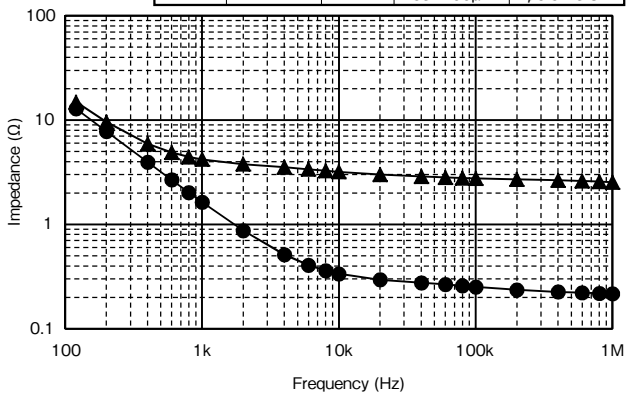

Temperature Characteristics (20°C, −40°C)

	Temperature	Series	Ratings	Case size
●—	20℃	RZF	35V100μF	φ6.3×7.7 L
▲—	−40℃	RZF	35V100μF	φ6.3×7.7 L

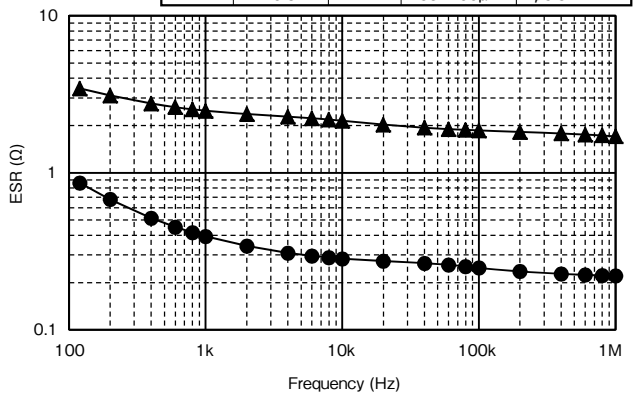

Endurance at 105°C

	Series	Ratings	Case size
●—	RZD	6.3V680μF	φ6.3×7.7 L
▲—	RVD	6.3V330μF	φ6.3×7.7 L

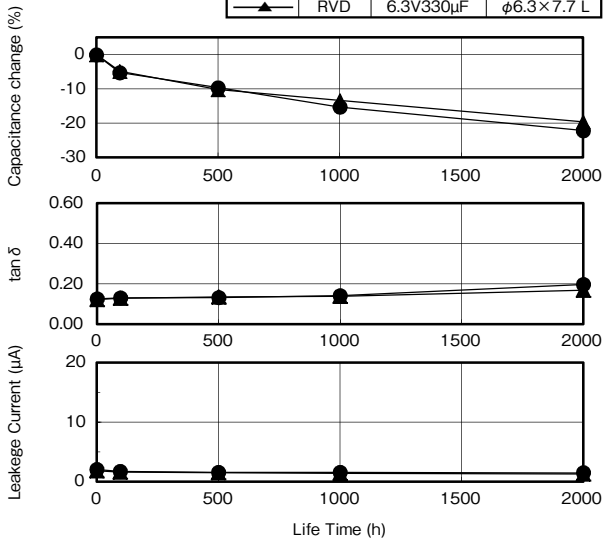

Endurance at 125°C

	Series	Ratings	Case size
●—	RZF	35V220μF	φ8×10 L
▲—	RVT	35V100μF	φ8×10 L

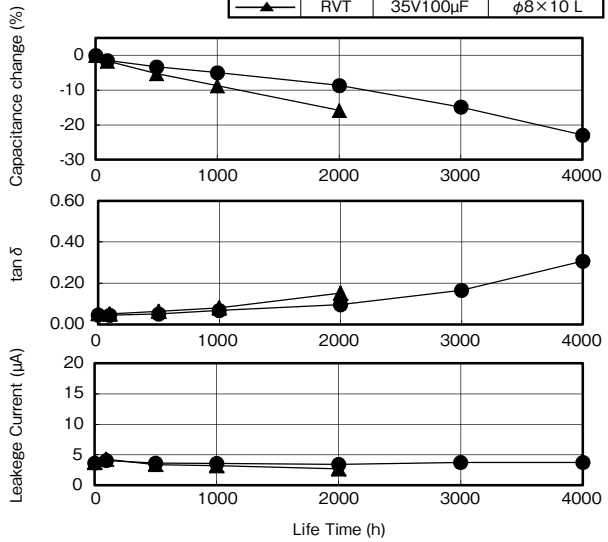

Notice : The measurement values are not guaranteed values, but measurements.

3.MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS (1)

Series RJD (garanteed 105°C) Frequency characteristics at 20°C

	Series	Ratings	Case size
●	RJD	35V1000μF	φ12.5×20 L
▲	RJB	35V680μF	φ12.5×20 L

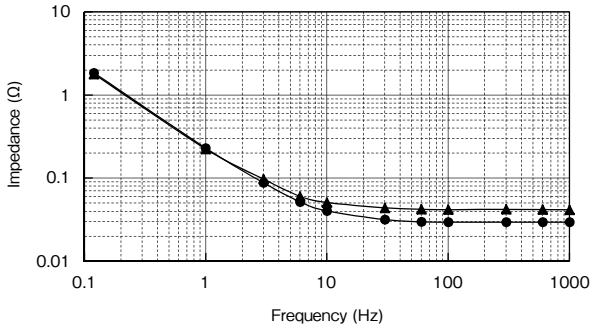

Series RJM (garanteed 105°C) Frequency characteristics at 20°C

	Series	Ratings	Case size
●	RJM	35V1000μF	φ12.5×20 L
▲	RJL	35V1000μF	φ12.5×25 L

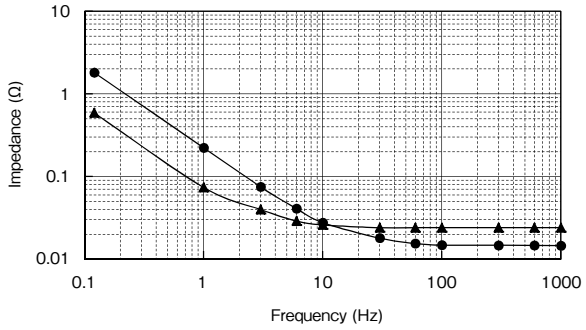

Temperature Characteristics

	Series	Ratings	Case size
●	RJD	35V1000μF	φ12.5×20 L
▲	RJB	35V680μF	φ12.5×20 L

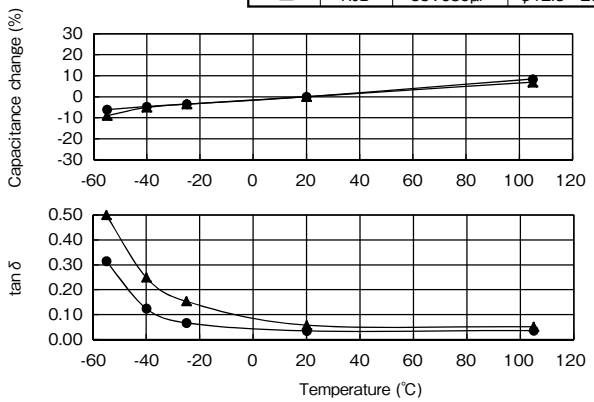

Temperature Characteristics

	Series	Ratings	Case size
●	RJM	35V1000μF	φ12.5×20 L
▲	RJL	35V1000μF	φ12.5×25 L

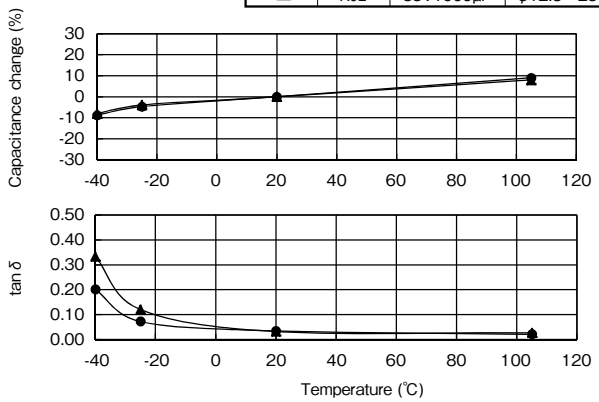

Endurance (Applied ripple current) at 105°C

	Series	Ratings	Case size	Rated ripple current (100kHz)
●	RJD	35V1000μF	φ12.5×20 L	1700mArms
▲	RJB	35V680μF	φ12.5×20 L	1690mArms

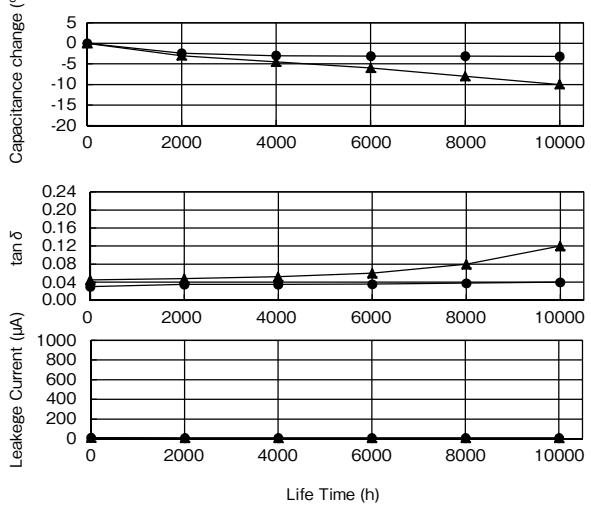

Endurance (Applied ripple current) at 105°C

	Series	Ratings	Case size	Rated ripple current (100kHz)
●	RJM	35V1000μF	φ12.5×20 L	2600mArms
▲	RJL	35V1000μF	φ12.5×25 L	2230mArms

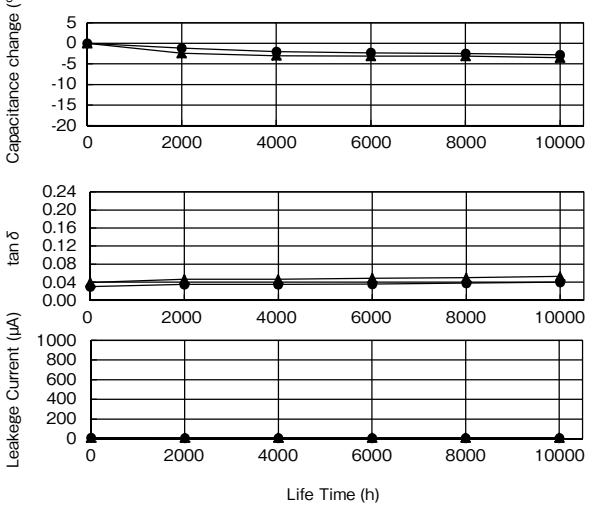

Notice : The measurement values are not guaranteed values, but measurements.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

4.MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS (2)

Series RKD (garanteed 125°C)
Frequency characteristics at 20°C

	Temperature	Series	Ratings	Case size
———	20℃	RKD	35V1000μF	φ12.5×25 L
—▲—	−40℃	RKD	35V1000μF	φ12.5×25 L

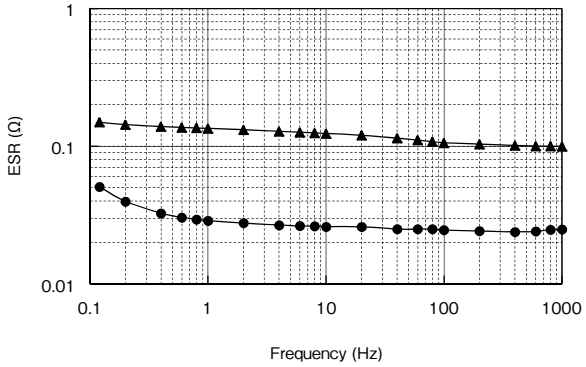

Series RKC (garanteed 135°C)
Frequency characteristics at 20°C

	Temperature	Series	Ratings	Case size
—●—	20℃	RKC	35V6200μF	φ18×35.5 L
—▲—	−40℃	RKC	35V6200μF	φ18×35.5 L

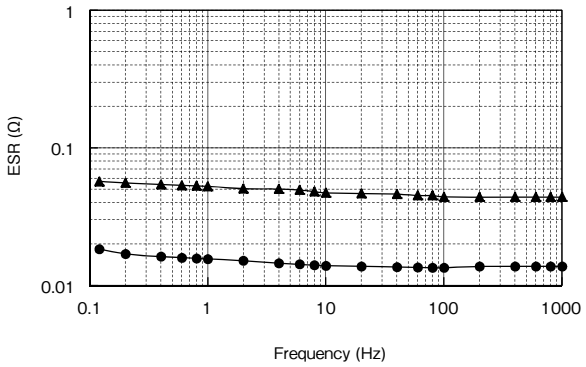

Temperature Characteristics

	Series	Ratings	Case size
—●—	RKD	35V1000μF	φ12.5×25 L

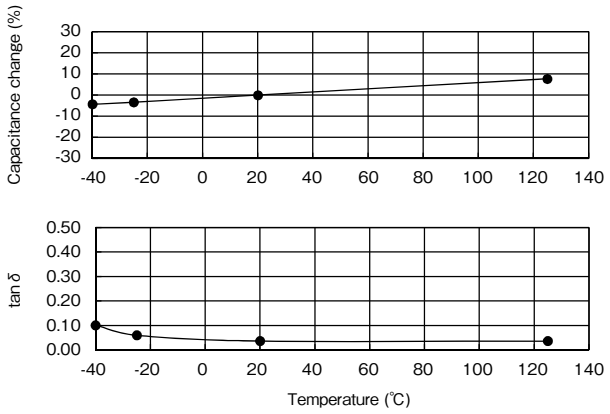

Temperature Characteristics

	Series	Ratings	Case size
—●—	RKC	35V6200μF	φ18×35.5 L

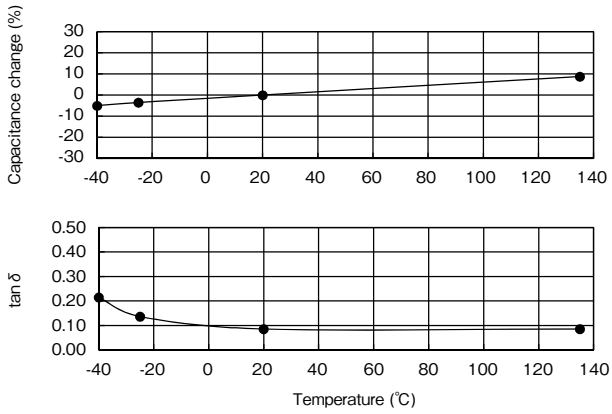

Endurance (Applied ripple current) at 125°C

	Series	Ratings	Case size	Rated ripple current (100kHz)
—●—	RKD	35V1000μF	φ12.5×25 L	2400mArms

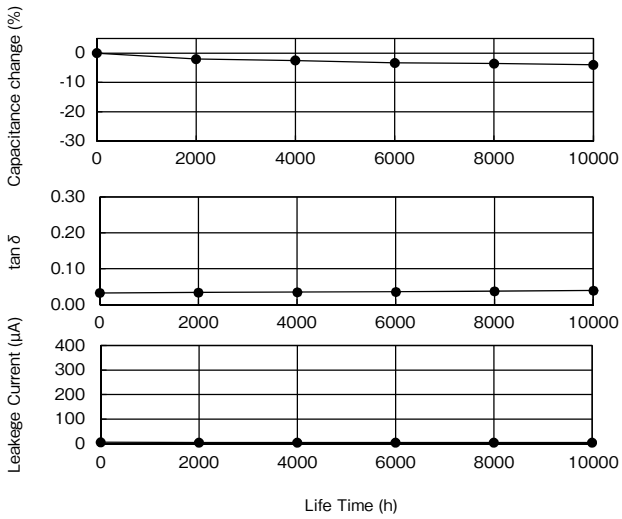

Endurance (Applied ripple current) at 135°C

	Series	Ratings	Case size	Rated ripple current (100kHz)
—●—	RKC	35V6200μF	φ18×35.5 L	3750mArms

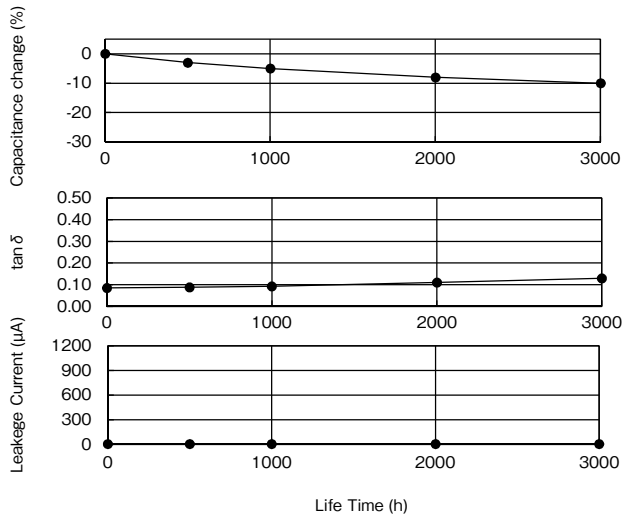

Notice : The measurement values are not guaranteed values, but measurements.

5.LARGE CAPACITANCE ALUMINUM ELECTROLYTIC CAPACITORS

Temperature characteristics, Series LAT • LAH

	Series	Ratings	Case size
●	L A T	200V680μF	φ25×30L
○	L A H	200V470μF	φ25×30L

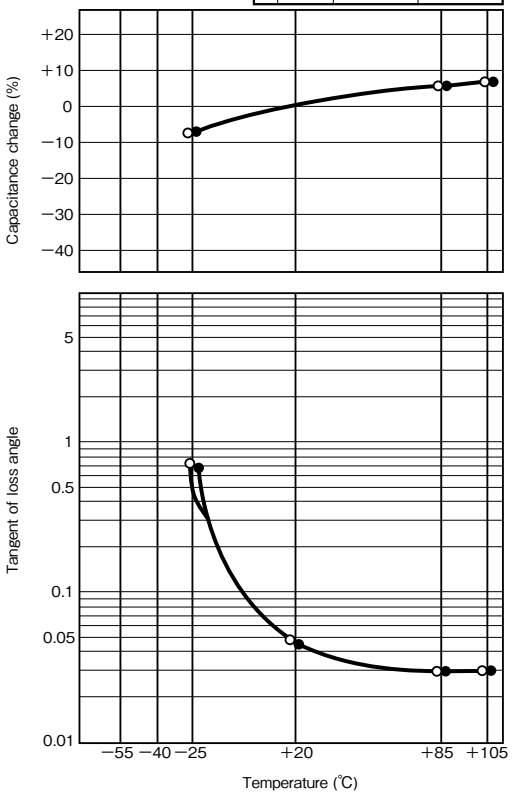

	Series	Ratings	Case size
●	L A T	400V180μF	φ25×30L
○	L A H	400V120μF	φ25×30L

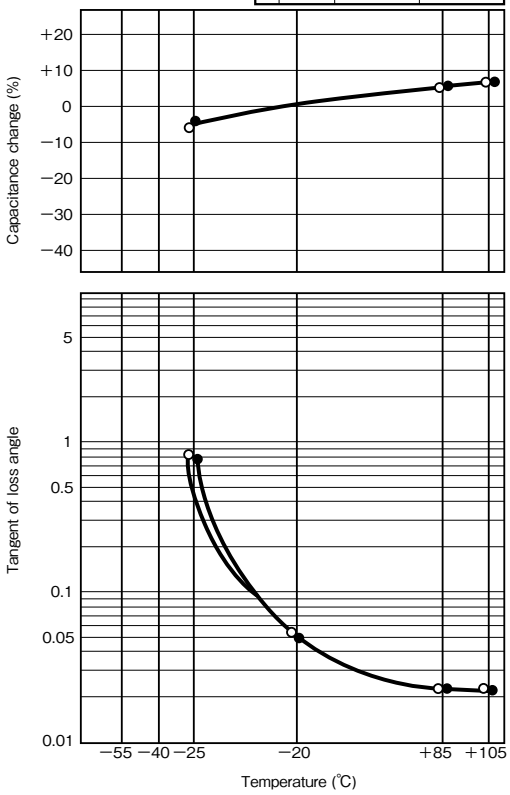

Endurance (Applied ripple current) at 105°C of Series LAT • LAH

	Series	Ratings	Case size	Rated Ripple current(120Hz)
●	L A T	160V680μF	φ22×35L	1.93Arms
○	L A H	160V560μF	φ22×40L	1.62Arms

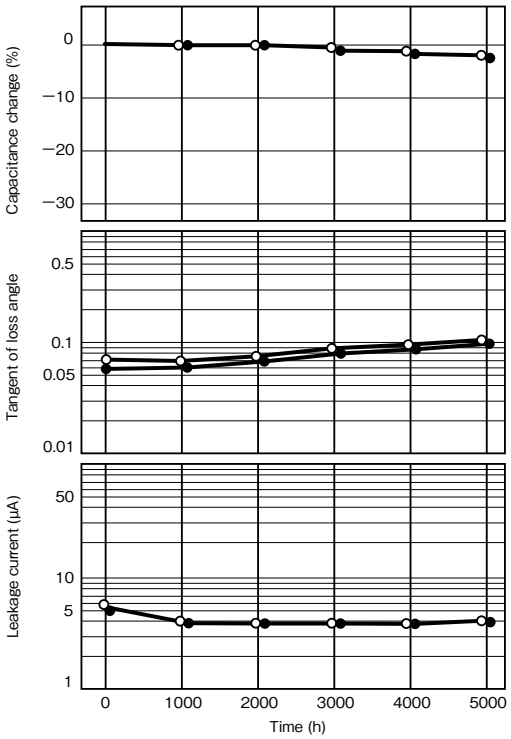

	Series	Ratings	Case size	Rated Ripple current(120Hz)
●	L A T	200V2700μF	φ35×50L	5.09Arms
○	L A H	200V1800μF	φ35×50L	2.70Arms

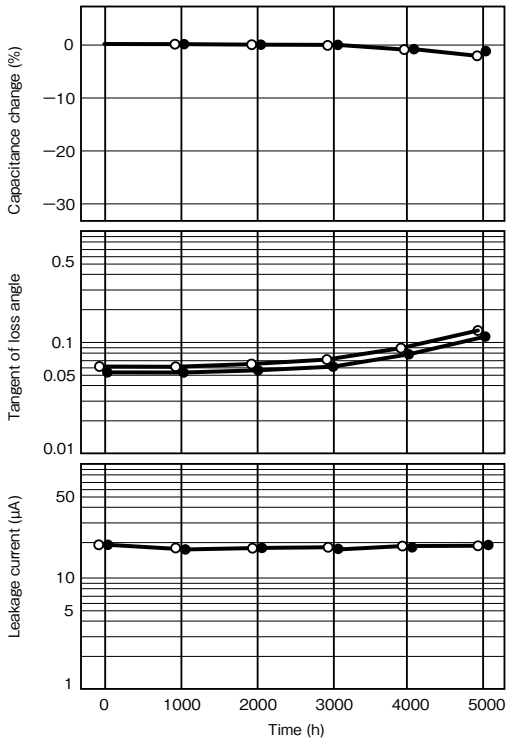

Notice : The measurement values are not guaranteed values, but measurements.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications
from ELNA to ensure that the component is suitable for your use.

ELNA®

Electric Double Layer Capacitors
"DYNACAP"

List of Contents

1. Type List and Systematized Classification for Electric Double Layer Capacitors · 232
2. Taping · 237
3. Cautions for Using Electric Double Layer Capacitors · · · · · · · · 239
4. Specifications for Electric Double Layer Capacitors by Series · 241
5. Technical Note for Electric Double Layer Capacitors · · · · · · · · 266
6. Presentation of Series and Parallel Connection Pack · · · · · · · 269
7. Technical data for Electric Double Layer Capacitors · · · · · · · · 270

2

CAT.No.2019/2020E

■ Type List for DYNACAP

★ : New series
☆ : Upgrade

Category		Series	Category temp. range ℃ Max.	Category temp. range ℃ Min.	Max.operating voltage V.DC	Capacitance range F	Color of sleeve	Page	Applications	Remarks
For memory backup	Reflow soldering type	DVN	+70	−25	5.5	0.047 to 0.33	Brown	241	Ideal for industrial, smart meter, backing up of RTC's for surveillance camera, momentary power assistance of a battery etc.	
	Reflow soldering type	DVL	+85	−40	5.5	0.047 to 0.22	Brown	242		
	Reflow soldering type	DVS	+85	−25	3.6	0.047 to 0.33	Brown	243		
	Standard type	DB	+70	−25	5.5	0.047 to 1.5	Indigo	244	Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, general electronic device, and others.	
	Low profile Low ESR type	DBN	+70	−25	5.5	0.047 to 1.5	Indigo	245		
	Low profile High temperature type	DBJ	+85	−10	5.5	0.047 to 1	Black	246		
	Low profile Low ESR High temperature	DBS	+85	−25	3.6	0.047 to 1	Black	247	Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, smart meter, general electronic device, and others.	
	Miniaturized Standard type	DX	+70	−25	5.5	0.047 to 1.5	Indigo	248	Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, general electronic device, and others.	
	Miniaturized Low ESR type	DXN	+70	−25	5.5	0.047 to 1.5	Indigo	249		
	Miniaturized High temperature type	DXJ	+85	−10	5.5	0.047 to 1	Black	250		
	Miniaturized Low ESR High temperature type	DXS	+85	−25	3.6	0.047 to 1	Black	251		
	High temperature type	DH	+85	−25	5.5	0.047 to 1	Indigo	252	Ideal for backing up of RTC's for smart meter, outdoor equipment, industrial, momentary power assistance of a battery, automotive etc.	
	Wide temperature range type	DHL	+85	−40	5.5	0.047 to 1	Indigo	253	Ideal for backing up of CMOS IC's, microcomputers, RAM's, RTC's for smart meter. outdoor equipment, auto motive and industrial.	
	High temperature long life type	DHC	+85	−25	5.5	0.047 to 1	Black	254		
	Coin type	DC (614)	+70	−25	2.5	0.2	Silver	255	Ideal for backing up of pager, solar watches, solar calculators, solar remote control units, camaras and the like.	
		DCK (614)	+60	−10	3.3	0.2				
		DC (621)	+70	−25	2.5	0.33				
		DCK (621)	+60	−10	3.3	0.4				
	Reflow soldering Coin type	DSK (414)	+70	−10	3.3	0.07	Silver	256	Mountable on board with best suited for mainly memory and time functions as well as memory backup for PDA and DSC.	
		DS (614)	+70	−25	2.5	0.2		257		
		DSK (614)	+60	−10	3.3	0.2				
		DS (621)	+70	−25	2.5	0.33				
		DSK (621)	+60	−10	3.3	0.33				
For power	Standard type	DZ	+70	−25	2.5 / 2.7	1 to 200	Black	258	Ideal for power supplies of LED displays, personal wireless items, backup for power supplies, and the storage battery of solar battery.	
	Large capacitance type	DZH	+60	−25	2.5	22 to 300	Black			
	High power type	DZN	+70	−25	2.5 / 2.7	1 to 200	Blue	260	Ideal for actuator of moters and electromagnetic coil drives.	
	High power Low temperature type	DU	+65	−40	2.7	1 to 50	Brown	262	Ideal for actuator of moters and electromagnetic coil drives.	
	High power High voltage tolerance Low temperature type	DUK	+65	−40	3.0	1 to 50	Brown	263	Ideal for actuator of moters and electromagnetic coil drives.	★
	Packed type	DZP	+70	−25	5.0	0.47 to 4.7	Blue	264	Ideal for power supplies of LED displays, personal wireless items, backup for power supplies, and the storage battery of solar battery.	

● **Some of the series listed in the below table have been removed from the catalogue. Please select from the new series for a designing your (new) application.**

Category		Series	Category temp. range ℃ Max.	Category temp. range ℃ Min.	Max.operating voltage V.DC	Capacitance range F	Color of sleeve	Applications	Substitute series to recommend
For memory backup	High voltage tolerance type	DK	+70	−25	6.3	0.047 to 1	Indigo	Ideal for backing up of Li-battery-backed equipment such as cameras, video, medical and telephone sets.	—
For energy	Low temperature type	DY	+70	−40	2.5	1 to 40	Brown	Ideal for power supplies of LED displays, personal wireless items, backup for power supplies, and the storage battery of solar battery.	DU
For energy	Large capacitance High power type	DW	+65	−40	2.7	650 to 3000	Black	Ideal for boost charge, such as energy regeneration, and a large current discharge use.	—

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ Systematized Classification of Electric Double Layer Capacitors

DYNACAP

For memory backup

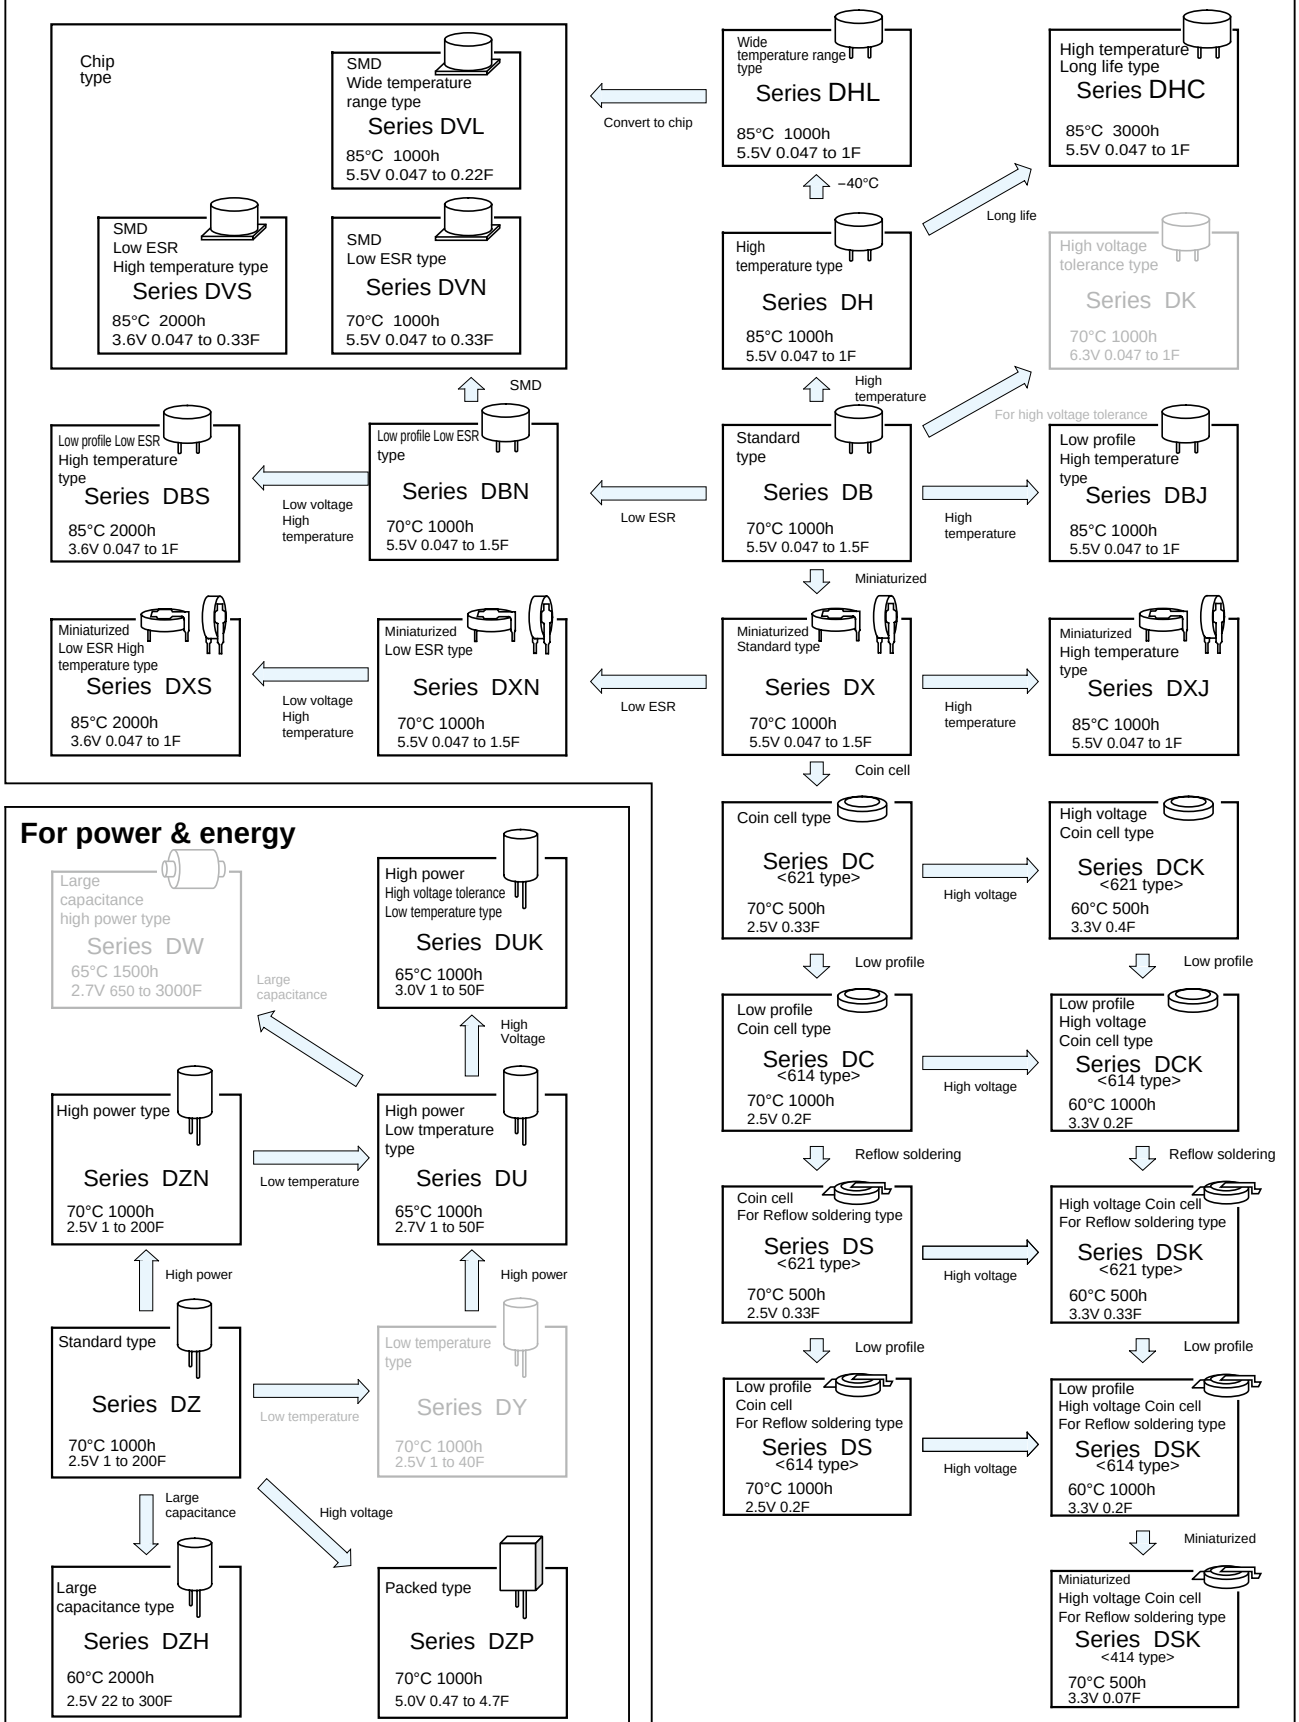

For power & energy

EDLC

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ Product Symbol System for Electric Double Layer Capacitors

□□□ – □□□ □ □□□ (□□) □ (□□□) □□□ – (□□) □□□

①	②	③	④	⑤	⑥	⑤	⑦	⑧	⑨
Series code	Max operating Voltage symbol	Shape symbol	Rated Capacitance symbol	Casing symbol	Plating symbol	Casing symbol	Optional symbol	Terminal symbol	Taping lead-forming symbol

①Series code

Please refer to the page of each series.

②Max operating voltage symbol

Example

Max.operating voltage (V)	Voltage symbol
2.5	2R5
2.7	2R7
3.0	3
3.3	3R3
3.6	3R6
5.0	5
5.5	5R5
6.3	6R3

③Shape symbol

Please refer to the page of each series.

④Rated capacitance symbol

Example

Capacitance (F)	Capacitance symbol	Capacitance (F)	Capacitance symbol
0.047	473	10	106
0.07	703	15	156
0.1	104	20	206
0.2	204	22	226
0.22	224	25	256
0.33	334	30	306
0.4	404	33	336
0.47	474	40	406
0.68	684	50	506
0.9	904	100	107
1	105	200	207
1.5	155	300	307
2.7	275		
3.3	335		
4.7	475		
5.6	565		
6.8	685		

⑤Casing symbol

Please refer to the page of each series.

⑥Plating symbol

Example

Symbol	Contents
U	Sn 100% plating or Sn+Cu plating
T	Sn 100% plating

⑦Optional symbol

Example (For Automotive)

Symbol	Contents
Q	Based on AEC-Q200
M	Based on AEC-Q200

⑧Terminal symbol

Please refer to the page of each series.

⑨Taping, Lead-forming symbol

DZ,DZH,DZN,DU,DUK : Write down one of the forming symbols given on page 15 to 19 for taping and lead-forming capacitors.
DVN,DVL,DVS,DS,DSK : Write down one of the forming symbols given on page 237 for taping capacitors.
When taping or lead-forming is not necessary, leave the boxes blank.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ Recommended soldering conditions (Lead Free)

● Series DS, DSK, DVN, DVL, DVS

Reflow soldering conditions.

Profile

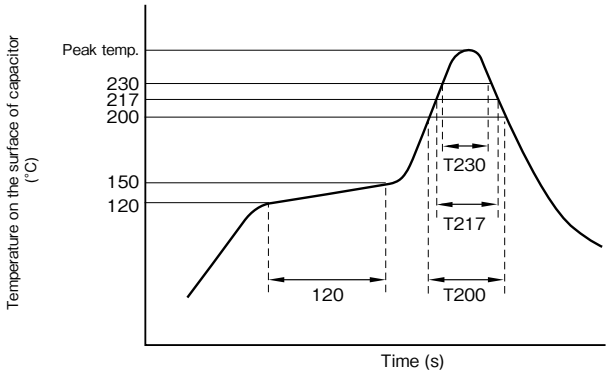

1. Preheating shall be under 150℃ within 120 seconds.
2. Peak temperature shall be within the following table.
3. For conditions exceeding the tolerances, consult with us.

T200 : Duration while capacitor head temperature exceeds 200℃ (s).
T217 : Duration while capacitor head temperature exceeds 217℃ (s).
T230 : Duration while capacitor head temperature exceeds 230℃ (s).
The measurement temperature point is the case top.

Series	Size	Peak temp. (5sec or less)	T230	T217	T200	Reflow cycle
DS DSK	φ4.8 to φ6.8	250℃ Max.	20sec. max.	30sec. max.	40sec. max.	2 times or less
DVN DVL DVS	φ12.5	260℃ Max.	20sec. max.	30sec. max.	50sec. max.	2 times or less

Attention : Carry out soldering work at low temperature and in the shortest time within above conditions.
Do NOT reflow solder, when cell voltage is above 0.5V.
＊Please consult with us about reflow soldering conditions other than the above.

■ Recommended soldering conditions (Lead free)

● Electric Double Layer capacitors

(1) Soldering iron conditions

Iron tip temperature should be 400°C±5°C within the duration of 4 secons.
However, soldering condition of DC or DCK series is only soldering iron.
DC or DCK series are iron tip temperature shou ld be 360 °C±5°C and the time should be 4 seconds or less.

(2) Flow soldering conditions

The recommendation soldering conditions of the product in which flow soldering is possible are as graph.

Recommended flow soldering profile
(PCB undersurface temperature)

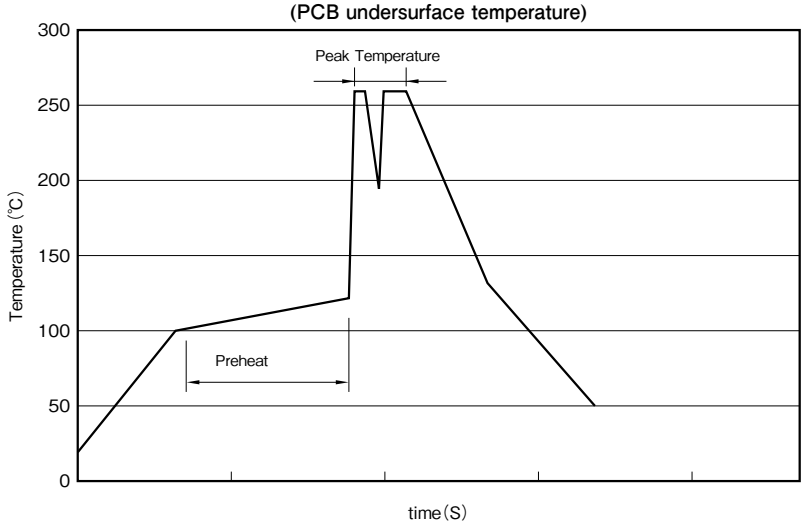

Type	Series	Size	Preheat		Peak	
			Temperature	Time	Temperature	Time
Coin cell	DB,DBN,DBJ DBS,DX,DXN DXJ,DXS,DH DHL,DHC	φ11.5 to φ21.5	100 to 110	30sec. max.	260°C Max	5sec. max.
Cylindrical cell	DZ,DZH,DZN DU,DUK,DZP	φ6.3 to φ35	100 to 130	30 to 60s	260°C±5°C	10sec. max.

Cautions when soldering

(1) Do not dip the capacitor into melted solder.
(2) Do not flux other part than the terminals.
(3) If there is a direct contact between the sleeve of the capacitor and the printed circuit pattern or a metal part of another component such as a lead wire, it may cause shrinkage of crack.
(4) If it is a coin type, please manage so that main part temperature including preheating does not exceed 90°C.
(5) Please refer to cautions for using on page 239 to 240 and the specification about other notes.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ Carrier tape dimensions (Series DS, DSK) polarity L

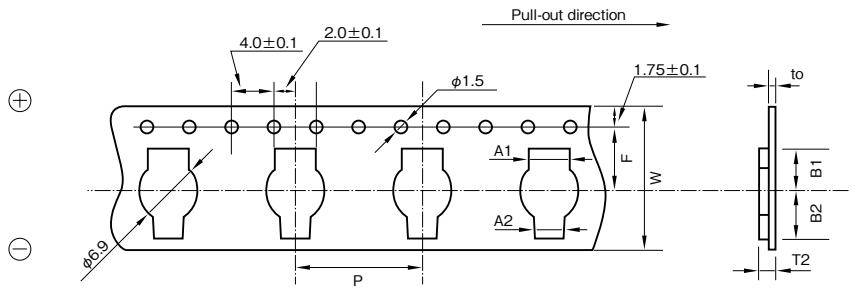

(Unit : mm)

Outside size	W	P	F	A1	A2	B1	B2	T2	to	ϕD
ϕ6.8×1.4 to 2.1L	24±0.2	12.0	11.5	4.4	3.4	5.9	6.5	3.2	0.3	6.9
ϕ4.8×1.4L (Terminal shaped : HL)	16±0.2	8.0	7.5	2.4	3.6	5.0	5.1	2.45	0.3	4.9
ϕ4.8×1.4L (Terminal shaped : HR)	↑	↑	↑	3.6	2.4	5.1	5.0	↑	↑	↑

■ Reel dimensions



(Unit : mm)

Outside size	W	t
ϕ6.8×1.4 to 2.1L	26	3
ϕ4.8×1.4L	18	3

■ Packing quantity

Outside size	Quantity
ϕ6.8×2.1L	1500PCS.
ϕ6.8×1.4L	1500PCS. to 2000PCS.
ϕ4.8×1.4L	2000PCS.

■ Carrier tape dimensions (Series DVN, DVL, DVS) polarity R

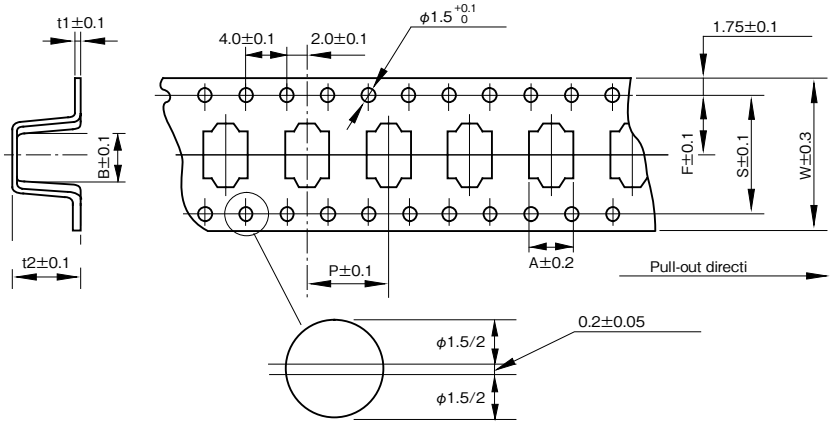

(Unit : mm)

Outside size	W	A	B	P	t2	F	t1	S
ϕ12.5×10.5L	32	13.4	13.4	24	11	14.2	0.5	28.4
ϕ12.5× 8.5L	32	13.4	13.4	24	9.5	14.2	0.5	28.4

■ Reel dimensions



(Unit : mm)

Outside size	W	t
ϕ12.5×10.5L	34	3
ϕ12.5× 8.5L	34	3

■ Packing quantity

Outside size	Quantity
ϕ12.5×10.5L	250pcs.
ϕ12.5× 8.5L	300pcs.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications
from ELNA to ensure that the component is suitable for your use.

■ Standard packing specification of Coin cell type

Series	・DC, DCK (614, 621) ・DX, DXJ, DXN, DXS ・DB, DBN, DBJ, DBS, DH, DHL, DHC (ϕ13.5)	・DB, DBN, DBJ, DBS, DH, DHL, DHC (ϕ21.5)	・DS, DSK (414, 614, 621) ・DVN, DVL, DVS
Packing style	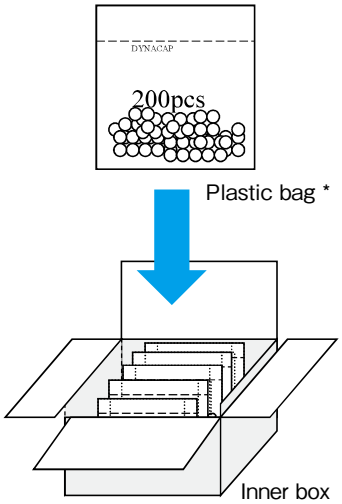 * DC, DCK : Vacuum packing	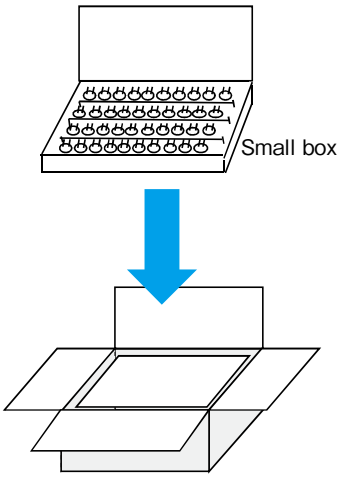	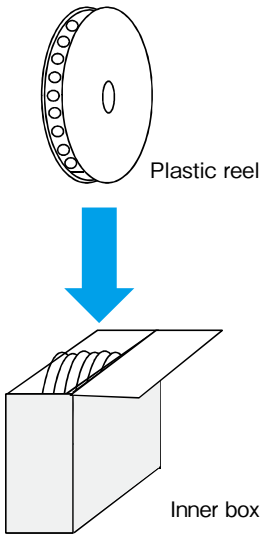

■ Standard packing specification of Cylindrical cell type

Series	・DU, DUK, DZ, DZN, DZH (ϕ6.3 to ϕ18) ・DZP	・DZ, DZN, DZH (ϕ22 or more)	・DU, DUK, DZ, DZN, DZH (ϕ6.3 to ϕ12.5) Taping
Packing style	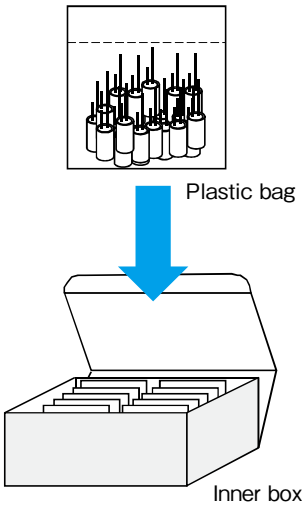	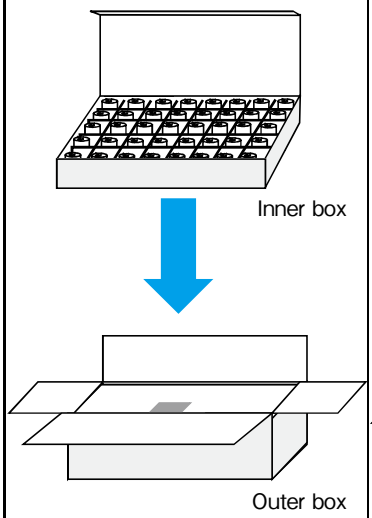	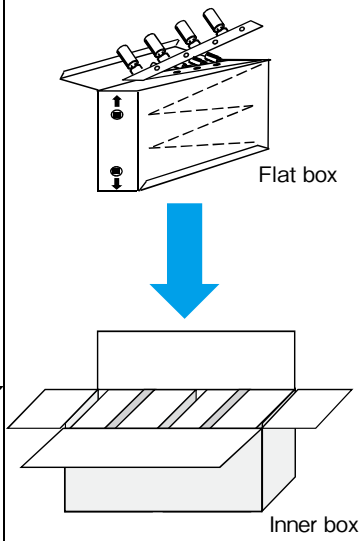 Box size are described on page 20.

Please inquire for details.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Cautions for Using Electric Double Layer Capacitors (DYNACAP)

■ Usage

1. Electric double layer capacitors (EDLC) use a conductive organic electrolyte.

The use at excessive mounting temperature or exceeding the upper category temperature can cause the electrolyte to leak. Especially,coin and multilayer coin types for the memory backup excluding the DZ, DZH, DZN, DU, DUK, DZP series use a low elastic plastic as the sealant in the cell construction like coin batteries; therefore, avoid using such capacitors in the Vicinity of automotive equipment with steep temperature change, and heating element such as motor, relay, transformer, power IC, etc. because of the risk of leakage of electrolyte.

2. Since EDLC is polarized, do not apply a reversed voltage.

EDLC is polarized. If a reversed voltage is applied for a long time, the leakage current will increase abruptly, which may cause a decrease in the capacity, an increase in the internal resistance, and causing leakage or damage to the product in some cases.

3. Do not apply any voltage higher than the operating maximum voltage (this means the surge voltage in the case of short-time charge).

If an overvoltage is applied to the product, the leakage current will increase abruptly and the product will become overheated, which may cause a decrease in the capacity, an increase in the internal resistance, and causing leakage or damage to the product in some cases.

4. Do not use smoothing a power supply (for absorbing its ripple).

Since the internal resistance of EDLC is high, the product will be overheated if it is used for smoothing a power supply (for absorbing its ripple), which may cause a decrease in the capacity. an increase in the internal resistance, and causing leakage or damage to the product in some cases .

5. Do not use in a circuit where quick charge and discharge are repeated Very often.

In a circuit where quick charge and discharge are repeated very often , the product will become overheated, which may cause a decrease in the capacity, an increase in the internal resistance, and causing leakage or damage to the product in some cases.

Reduce the charge and discharge currents while selecting a product with low internal resistance, and rnake sure that the product surface temperature does not rise.

6. EDLC life depends heavily on the ambient temperature.

①The lifetime of EDLC is seriously affected by change in ambient temperature. If the temperature is lowered by 10℃, the lifetime will be approximately doubled. Therefore, the product should be used at a temperature lower than the guaranteed maximum value for maximum life.

②If the capacitor is used at a temperature exceeding its maximum guaranteed temperature, not only is its life shortened, but increased vapor pressure of electrolyte or electrochemical reactions may increase the internal pressure, and causing leakage or damage to the product in some cases.

7. Do not use the product in an ambient atmosphere containing waterdrops (condensation) or toxic gases.

Although EDLC is sealed, water droplets or toxic gases may do degradation characteristics, a leakage and corrode the lead wires and the case, which may cause a breaking of the wires.

Avoid abrupt temperature changes, which may cause water droplets, resulting in product deterioration and electrolyte leakage.

8. Contact us before connecting the products in series.

A series connection will cause imbalance in the voltage, charged to the capacitors and an overvoltage may be charged to one or more them. This may cause a decrease in the capacity, an increase in the internal resistance and causing leakage or damage to the product in some cases. When using series connection for several capacitors, please derate the applied voltage from the operating maximum voltage or use balancing circuits (bleeder resistor, etc.) to compensate for the imbalance in the applied voltage for each capacitor Moreover, please ensure the arrangement does not cause temperature fluctuation between capacitors.

9. About vibration.

A terminal blank, a terminal bend, and a crease may occur by adding too much vibration to a capacitor.

Moreover, depending on the case, an EDLC may do degradation of the characteristic, breakage, and a leakage.

When you become too much vibration, please contact us.

10. When used on a double sided printed circuit board, do not overlap the wiring patterns on the mounted part.

A short circuit may be created by certain wiring conditions. Should the electrolyte leaks, the circuit pattern may cause a short circuit, resulting in tracking or migration.

11. Do not keep In high temperature and high humidity atmospheres.

①Avoid high temperature or high humidity or direct rays when storing capacitors.

② Keep the product in a place where the temperature is 5℃ to 30℃ and the humidity is lower than 60%. Avoid an abrupt temperature change, which may cause condensation or deterioration of the product or liquid leakage. (Recommended storage term: 1year or less after delivery)

③ Do not store EDLC at a place where there is a possibility that they may get water, salt or oil spill.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

④Do not store EDLC at place where the air contains dense hazardous gas (hydrogen sulfide, sulfurous acid, nitrous acid, chlorine ammonia, etc.).
⑤Do not store EDLC at a place where it gets ultraviolet ray or radioactive ray.

12. Capacitors fitted with a relief valve

①The relief valve is provided with a valve function with part of the case made thin to avoid explosion by increased internal pressure when the capacitor is under abnormal load such as overvoltage or reverse voltage. After activation of the relief valve, the capacitor must be replaced as it does not restore.
②For the capacitors with a case relief valve (series DZ,DZH,DZN,DZP,DU,DUK), provide a void on the top of the relief valve so as not to hamper its activation. Make a void of 2 mm or more for the product of ϕ18 or less in diameter, and a void of 3 mm or more for the product of ϕ20 to ϕ35 mm in diameter on the top.

13. Use at a high altitude

The use of capacitors at high altitudes such as on an airplane causes a large difference between the internal pressure of the capacitors and the atmospheric pressure.
However, there is no problem in use under atmospheric pressure up to about an altitude of 10,000 meters.
If the condition is severe like space, please contact us.

■Mounting

1. Do not overheat when soldered.

Depending on the type and size of the board, the product may be subjected to overheat, leading to loss of airtightness. This may greatly shorten the product life or cause liquid leakage.
In case of a 1.6mm-thick and single side printed board. for example, keep the following soldering conditions: temperature lower then 260℃, time within 5 seconds (coin type), 10 seconds (Cylindrical type).
When a board thinner than 1.6 mm or multi-layer printed board is used, contact us.
In the case of hand soldering, the iron tip temperature is lower than 400℃, time is shorter than 4 seconds.
The coin types and multilayer coin types excluding the DZ and reflow-compatible coin types use polypropylene as the packing material for sealing and therefore susceptible to excessive heat. Note that the component body temperature shall be controlled so as not to exceed 90℃ including preheating.

2. When soldering the capacitor to the wiring board, do not attach the body of the capacitor to the circuit board.

If the body of the capacitor is attached directly to the circuit board, the flux or solder can blow through the through holes in the circuit board, negatively impacting the capacitor.
Moreover, the heat influence at the time of soldering can be reduced by floating the body.

3. Contact us when cleaning is necessary after soldering.

Certain types of solvents are not compatible and may cause damage.

4. Contact us when the product Is attached by adhesive bonding.

Certain types of adhesives are not compatible.
Paste bond partially between the product and the board so that the product will not adhere completely to the board.
Do not raise the temperature over the guaranteed value while the bond is hardening.

5. Heating conditions of adhesive curing oven

During heating of the adhesive curing oven, application of excessive heat may significantly shorten the product life or cause liquid leakage. Control the body temperature so as not to exceed 90℃ during work while setting the allowable atmospheric temperature below 110℃, and allowable heating time within 30 seconds.
For the heating conditions deviating from the above, consult with us providing your temperature profile conditions.

6. Be careful not to apply an excessive force to the capacitor body, terminals or lead wires.

①Mount the capacitor while making sure that the terminal spacing of the capacitor and the spacing of the holes in the printed wiring board are aligned.
②If the capacitor body is subjected to stress such as grabbing, falling, bend, pushing or twisting after mounted, its terminals may come off, leading to open, short or liquid leakage.

■Other cautions

1. Emergency procedures

If the EDLC overheats or starts to smell, immediately switch off the units main power supply to stop operation.
Keep your face and hands away from the EDLC, since the temperature may be high enough to cause the EDLC to ignite and burn.

2. Periodical inspections should be established for the EDLC used in industrial appliances.

The following items should be checked:
①Appearance : Check if there is leakage.
②Electronic performance : Check the leakage current, the electrostatic, the internal resistance and other items described in the catalog or the product specifications.

3. Disposing of EDLC

①Punch a hole or crush the EDLC (to prevent explosion) before incineration at approved facility.
②If they are not to be incinerated, bring them to a professional industrial waste disposal company.

4. Other notes

Please refer to the following literature for anything not described in the specification or the catalog. (Technical Report of Japan Electronics and Information Technology Industries Association #EIAJ RCR-2370B "Guideline of notabilia for fixed electric double layer capacitors")

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

5.5V SMD, Low Resistance Capacitors

GREEN CAP | SMD | 70°C

- Size : φ12.5×8.5Lmm, compatible with surface mounting and low ESR.
- Unlike batteries, safe and high reliability without containing active and hazardous substance.
- Unlike batteries, excellent charge and discharge characteristics with no chemical reactions.
- Responds to temperature 260℃ during the reflow peek.
- Ideal for industrial, smart meter, backing up of RTC's for surveillance camera, momentary power assistance of a battery etc.

Marking color : White print on an brown sleeve

Convert to chip

DVN ⇦ DBN

Specifications

Item	Performance
Category temperature range (℃)	−25 to +70
Tolerance at rated capacitance (%)	−20 to +80
Internal resistance at 1 kHz	

Rated capacitance (F)	0.047	0.1	0.22	0.33
Internal resistance (Ω Max.)	30	30	30	30

Characteristics at high and low temperature	
Percentage of capacitance change	Within ±30% of the value at 20℃
Internal resistance	Five times or less of the value at 20℃

Endurance (70℃)	
Test time	1000 hours
Percentage of capacitance change	Within ±30% of the initial measured value
Internal resistance	Four times or less of the initial specified value.

Shelf life (70℃)	Test time : 1000 hours ; Same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)

Outline Drawing

Unit : mm

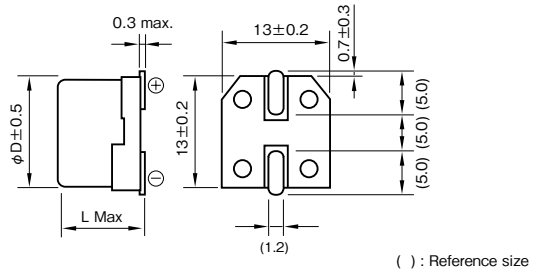

( ) : Reference size

Recommended land pattern size

Unit : mm



Thickness of solder paste: 0.15mm

Part numbering system (example : 5.5V0.22F)						
DVN	—	5R5	D	224	T —	R5
Series code		Max. operating voltage symbol		Rated capacitance symbol		Taping symbol

Part number is refer to following table.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
5.5	0.047	DVN-5R5D473T-R5	12.5×8.5
5.5	0.1	DVN-5R5D104T-R5	12.5×8.5
5.5	0.22	DVN-5R5D224T-R5	12.5×8.5
5.5	0.33	DVN-5R5D334T-R5	12.5×8.5

∗soldering conditions are described on page 235.
∗It can discharge with 1.5 times as much current (mA) as rated capacitance.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

ELNA®

5.5V SMD, Wide Temperature range Capacitors

GREEN CAP | SMD | 85°C

- Size : φ12.5×10.5Lmm, compatible with surface mounting.
- Wide temperature range (−40 to 85℃), Low ESR.
- Unlike batteries, safe and high reliability without containing active and hazardous substance.
- Unlike batteries, excellent charge and discharge characteristics with no chemical reactions.
- Responds to temperature 260℃ during the reflow peek.
- Ideal for industrial, smart meter, backing up of RTC's for surveillance camera, momentary power assistance of a battery, automotive etc.

Marking color : White print on an brown sleeve

Convert to chip

DVL ⇦ DHL

Specifications

Item	Performance
Category temperature range (℃)	− 40 to +85
Tolerance at rated capacitance (%)	− 20 to +80
Internal resistance at 1 kHz	Rated capacitance (F): 0.047 / 0.1 / 0.22 Internal resistance (Ω Max.): 45 / 45 / 45
Characteristics at high and low temperature	Percentage of capacitance change: Within ±30% of the value at 20℃ Internal resistance: −40℃ : Seven times or less of the value at 20℃ 85℃ : Five times or less of the value at 20℃
Endurance (85℃)	Test time: 1000 hours Percentage of capacitance change: Within ±30% of the initial measured value Internal resistance: Four times or less of the initial specified value
Shelf life (85℃)	Test time : 1000 hours ; Same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)

Outline Drawing

Unit : mm

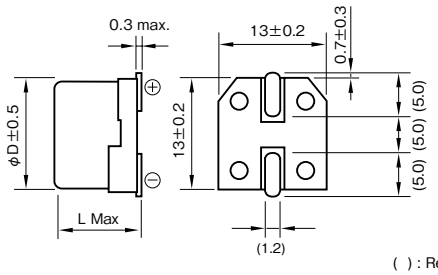

( ) : Reference size

Recommended land pattern size

Unit : mm



Thickness of solder paste: 0.15mm

Part numbering system (example : 5.5V0.22F)

DVL	—	5R5	D	224	T	—	R5
Series code		Max. operating voltage symbol		Rated capacitance symbol			Taping symbol

Part number is refer to following table.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
5.5	0.047	DVL-5R5D473T-R5	12.5×10.5
5.5	0.1	DVL-5R5D104T-R5	12.5×10.5
5.5	0.22	DVL-5R5D224T-R5	12.5×10.5

*soldering conditions are described on page 235.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

3.6V SMD, High Temperature range Capacitors

GREEN CAP | SMD | 85°C

- Size : φ12.5×8.5Lmm, compatible with surface mounting.
- Wide temperature range (−25 to 85℃), Low ESR.
- Unlike batteries, safe and high reliability without containing active and hazardous substance.
- Unlike batteries, excellent charge and discharge characteristics with no chemical reactions.
- Responds to temperature 260℃ during the reflow peek.
- Ideal for industrial, smart meter, backing up of RTC's for surveillance camera, momentary power assistance of a battery, automotive etc.

Marking color : White print on a brown sleeve

Convert to chip

DVS ⇦ DBS

Specifications

Item	Performance
Category temperature range (℃)	− 25 to +85
Tolerance at rated capacitance (%)	− 20 to +80
Internal resistance at 1 kHz	

Rated capacitance (F)	0.047	0.1	0.22	0.33
Internal resistance (Ω Max.)	30	30	30	30

Characteristics at high and low temperature	
Percentage of capacitance change	Within ±30% of the value at 20℃
Internal resistance	Five times or less of the value at 20℃

Endurance (85℃)	
Test time	2000 hours
Percentage of capacitance change	Within ±30% of the initial measured value
Internal resistance	Four times or less of the initial specified value.

Shelf life (85℃)	Test time : 1000 hours ; Same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)

Outline Drawing

Unit : mm

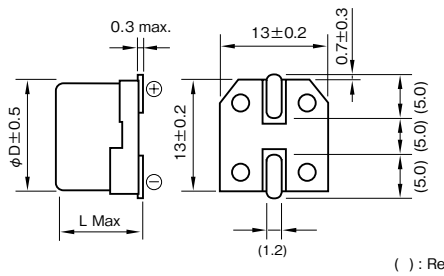

( ) : Reference size

Recommended land pattern size

Unit : mm



Thickness of solder paste: 0.15mm

Part numbering system (example : 3.6V0.22F)

DVS	—	3R6	D	224	T	—	R5
Series code		Max. operating voltage symbol		Rated capacitance symbol			Taping symbol

Part number is refer to following table.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
3.6	0.047	DVS-3R6D473T-R5	12.5×8.5
3.6	0.1	DVS-3R6D104T-R5	12.5×8.5
3.6	0.22	DVS-3R6D224T-R5	12.5×8.5
3.6	0.33	DVS-3R6D334T-R5	12.5×8.5

∗soldering conditions are described on page 235.
∗It can discharge with 1.5 times as much current (mA) as rated capacitance.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

ELNA®

5.5V Standard Capacitors

GREEN CAP | 70°C

- Small-sized, large capacity, excellent voltage holding.
- For all ratings, uniform 5mm pitch of terminal spacing.
- Wider temperature range (−25 to +70°C) than battery.
- φ21.5×8.0Lmm size can encase up to 1.5F.
- Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, general electronic device, and others.

DB

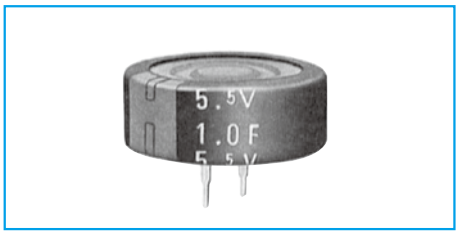

Marking color : White print on an indigo sleeve

Specifications

Item	Performance
Category temperature range (℃)	−25 to +70
Tolerance at rated capacitance (%)	−20 to +80
Internal resistance at 1 kHz	
Characteristics at high and low temperature	
Endurance (70℃)	
Shelf life (70℃)	Test time : 1000 hours ; Same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)

Internal resistance at 1 kHz:

Rated capacitance (F)	0.047	0.1	0.22	0.33	0.47	0.47	1	1.5
Internal resistance (Ω Max.)	120	75	75	75	75(φ13.5)	30(φ21.5)	30	30

Characteristics at high and low temperature:

Percentage of capacitance change	Within ±30% of the value at 20℃
Internal resistance	Five times or less of the value at 20℃

Endurance (70℃):

Test time	1000 hours
Percentage of capacitance change	Within ±30% of the initial measured value
Internal resistance	Four times or less of the initial specified value

Outline Drawing

Unit : mm

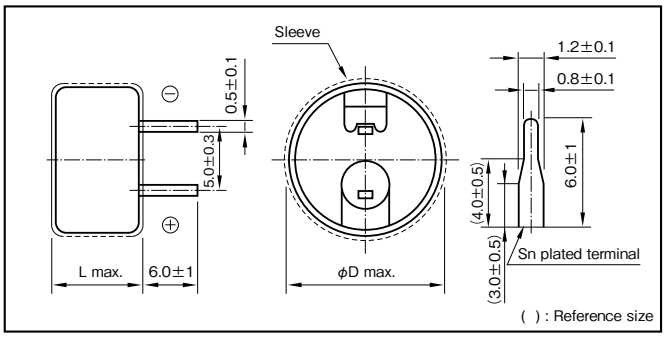

Part numbering system (example : 5.5V0.22F)

DB	—	5R5	D	224	⬚	T
Series code		Max. operating voltage symbol		Reted capacitance symbol	Additional symbol	

Part number is refer to following table.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
5.5	0.047	DB-5R5D473T	13.5×7.5
5.5	0.1	DB-5R5D104T	13.5×7.5
5.5	0.22	DB-5R5D224T	13.5×7.5
5.5	0.33	DB-5R5D334T	13.5×7.5
5.5	0.47	DB-5R5D474ST	13.5×7.5
5.5	0.47	DB-5R5D474T	21.5×8.0
5.5	1	DB-5R5D105T	21.5×8.0
5.5	1.5	DB-5R5D155T	21.5×8.0

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

5.5V Low Resistance

GREEN CAP | 70°C | Low ESR

- Internal resistance was reduced to about 1/3 (φ13.5) , compared with DB series.
- It excels in rapid charge.

Low resistance

DBN ⇦ DB

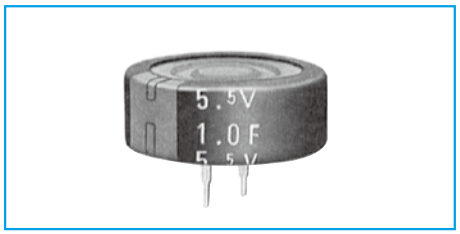

Marking color : White print on an indigo sleeve

Specifications

Item	Performance
Category temperature range (℃)	−25 to +70
Tolerance at rated capacitance (%)	−20 to +80
Internal resistance at 1 kHz	
Characteristics at high and low temperature	
Endurance (70℃)	
Shelf life (70℃)	Test time : 1000 hours ; Same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)

Internal resistance at 1 kHz:

Rated capacitance (F)	0.047	0.1	0.22	0.33	0.47	0.47	1	1.5
Internal resistance (Ω Max.)	25	25	25	25	25(φ13.5)	20(φ21.5)	20	20

Characteristics at high and low temperature:

Percentage of capacitance change	Within ±30% of the value at 20℃
Internal resistance	Five times or less of the value at 20℃

Endurance (70℃):

Test time	1000 hours
Percentage of capacitance change	Within ±30% of the initial measured value
Internal resistance	Four times or less of the initial specified value

Outline Drawing

Unit : mm

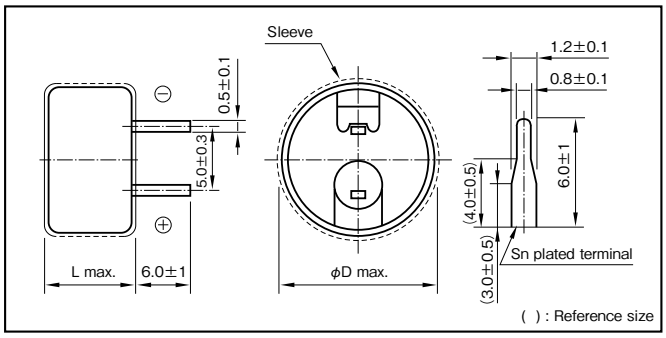

Part numbering system (example : 5.5V0.22F)

DBN	—	5R5	D	224	⬚	T
Series code		Max. operating voltage symbol		Reted capacitance symbol	Additional symbol	

Part number is refer to following table.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
5.5	0.047	DBN-5R5D473T	13.5×7.5
5.5	0.1	DBN-5R5D104T	13.5×7.5
5.5	0.22	DBN-5R5D224T	13.5×7.5
5.5	0.33	DBN-5R5D334T	13.5×7.5
5.5	0.47	DBN-5R5D474ST	13.5×7.5
5.5	0.47	DBN-5R5D474T	21.5×8.0
5.5	1	DBN-5R5D105T	21.5×8.0
5.5	1.5	DBN-5R5D155T	21.5×8.0

*It can discharge with 1.5 times as much current (mA) as rated capacitance.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

ELNA®

5.5V Low Profile and High Temperature Capacitors

GREEN CAP | 85°C

- High temperature type of series DB.
- Small-sized, large capacity, excellent voltage holding.
- For all ratings, uniform 5mm pitch of terminal spacing.
- φ13.5×7.5Lmm size can encase up to 0.33F.
- Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, general electronic device, and others.



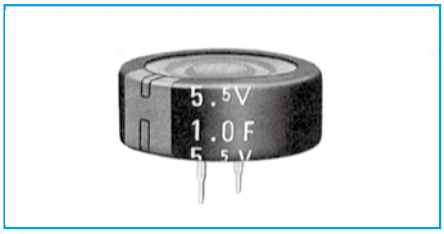

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−10 to +85
Tolerance at rated capacitance (%)	−20 to +80
Internal resistance at 1 kHz	
Characteristics at high and low temperature	
Endurance (85℃)	
Shelf life (85℃)	Test time : 1000 hours ; Same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)

Internal resistance at 1 kHz:

Rated capacitance (F)	0.047	0.1	0.22	0.33	0.47	1
Internal resistance (Ω Max.)	200	150	150	150	100	75

Characteristics at high and low temperature:

Percentage of capacitance change	Within ±30% of the value at 20℃
Internal resistance	Four times or less of the initial specified value.

Endurance (85℃):

Test time	1000 hours
Percentage of capacitance change	Within ±30% of the initial measured value
Internal resistance	Four times or less of the initial specified value

Outline Drawing

Unit : mm

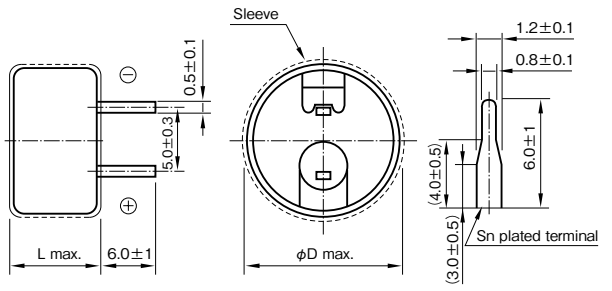

( ) : Reference size

Part numbering system (example : 5.5V0.22F)

DBJ	—	5R5	D	224	T
Series code		Max.operating voltage symbol		Rated capacitance symbol	

Part number is refer to following table.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
5.5	0.047	DBJ-5R5D473T	13.5×7.5
5.5	0.1	DBJ-5R5D104T	13.5×7.5
5.5	0.22	DBJ-5R5D224T	13.5×7.5
5.5	0.33	DBJ-5R5D334T	13.5×7.5
5.5	0.47	DBJ-5R5D474T	21.5×8.0
5.5	1	DBJ-5R5D105T	21.5×8.0

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

3.6V Low Profile and Low ESR High Temperature Capacitors

GREEN CAP | 85°C

- Long life of 3.6V 2000 hours in small size low ESR.
- For all ratings, uniform 5mm pitch of terminal spacing.
- Wider temperature range (−25 to +85℃) than battery.
- φ13.5×7.5Lmm size can encase up to 0.47F.
- Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, smart meter, general electronic device, and others.
- It excels in rapid charge.

Low voltage
High
temperature

DBS ⇦ DBN

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−25 to +85
Tolerance at rated capacitance (%)	−20 to +80
Internal resistance at 1 kHz	

Rated capacitance (F)	0.047	0.1	0.22	0.33	0.47	0.47	1
Internal resistance (Ω Max.)	25	25	25	25	25(φ13.5)	20(φ21.5)	20

Characteristics at high and low temperature	
Percentage of capacitance change	Within ±30% of the value at 20℃
Internal resistance	Five times or less of the value at 20℃

Endurance (85℃)	
Test time	2000 hours (φ13.5 0.47F : 1000 hours)
Percentage of capacitance change	Within ±30% of the initial measured value
Internal resistance	Four times or less of the initial specified value

Shelf life (85℃)	Test time : 1000 hours ; Same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)

Outline Drawing

Unit : mm

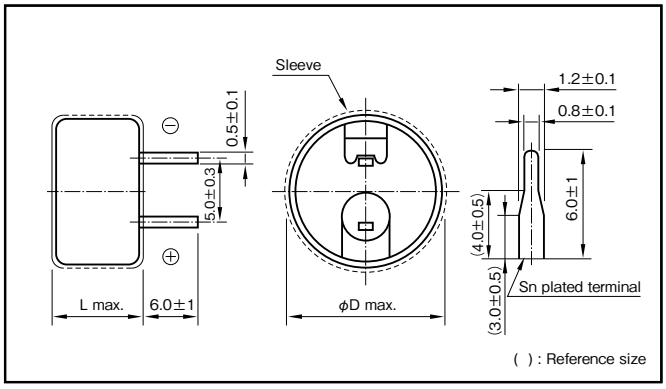

Part numbering system (example : 3.6V0.22F)

DBS	—	3R6	D	224	□	T
Series code		Max. operating voltage symbol		Reted capacitance symbol	Additional symbol	

Part number is refer to following table.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
3.6	0.047	DBS-3R6D473T	13.5×7.5
3.6	0.1	DBS-3R6D104T	13.5×7.5
3.6	0.22	DBS-3R6D224T	13.5×7.5
3.6	0.33	DBS-3R6D334T	13.5×7.5
3.6	0.47	DBS-3R6D474ST	13.5×7.5
3.6	0.47	DBS-3R6D474T	21.5×8.0
3.6	1	DBS-3R6D105T	21.5×8.0

∗It can discharge with 1.5 times as much current (mA) as rated capacitance.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

5.5V Miniaturized Standard Capacitors

GREEN CAP | 70°C

- Smaller and lighter than Series DB.
- 5mm tall. Max. thin profile (H-shaped).
- Miniaturized but can encase up to 0.47F in φ11.5 case, and 1.5F in φ19.0 case.
- Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, general electronic device, and others.

Miniaturized

DX ⇦ DB

Marking color : White print on an indigo sleeve

Specifications

Item	Performance
Category temperature range (℃)	−25 to +70
Tolerance at rated capacitance (%)	−20 to +80
Internal resistance at 1 kHz	
Characteristics at high and low temperature	
Endurance (70℃)	
Shelf life (70℃)	Test time : 1000 hours ; Same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)

Internal resistance at 1 kHz:

Rated capacitance (F)	0.047	0.1	0.22	0.33	0.47	0.47	1	1.5
Internal resistance (Ω Max.)	120	75	75	75	75(φ11.5)	30(φ19.0)	30	30

Characteristics at high and low temperature:

Percentage of capacitance change	Within ±30% of the value at 20℃
Internal resistance	Five times or less of the value at 20℃

Endurance (70℃):

Test time	1000 hours
Percentage of capacitance change	Within ±30% of the initial measured value
Internal resistance	Four times or less of the initial specified value

Outline Drawing

Unit : mm

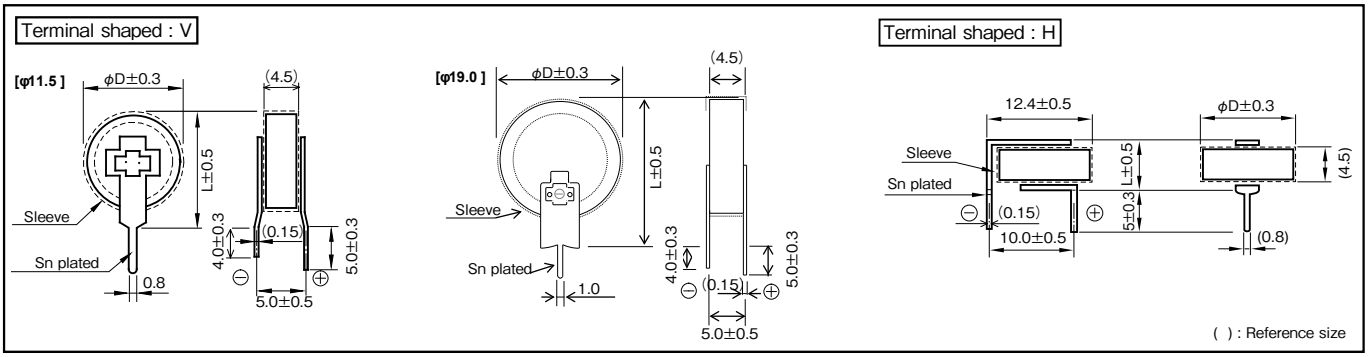

Part numbering system (example : 5.5V0.22F)

DX	—	5R5	□	224	□	U
Series code		Max.operating voltage symbol	Terminal code	Reted capacitance symbol	Additional symbol	

Part number is refer to following table.

Note

Do not apply external force to products or terminals as stress such as twisting, bending, pushing, or falling of such products or terminals may remove the terminals, resulting in an open/short circuit or liquid leakage.
Avoid applying excessive heat to capacitors during heating of an adhesive curing oven.
For details, refer to the precautions in use of DYNACAP.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
5.5	0.047	DX-5R5V473U	11.5×13.0
		DX-5R5H473U	11.5× 5.0
5.5	0.1	DX-5R5V104U	11.5×13.0
		DX-5R5H104U	11.5× 5.0
5.5	0.22	DX-5R5V224U	11.5×13.0
		DX-5R5H224U	11.5× 5.0
5.5	0.33	DX-5R5V334U	11.5×13.0
		DX-5R5H334U	11.5× 5.0
5.5	0.47	DX-5R5V474SU	11.5×13.0
		DX-5R5H474SU	11.5× 5.0
		DX-5R5V474U	19.0×20.5
5.5	1	DX-5R5V105U	19.0×20.5
5.5	1.5	DX-5R5V155U	19.0×20.5

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

5.5V Miniaturized Low Resistance Capacitors

GREEN CAP | 70°C

- Internal resistance was reduced to about 1/3 (φ11.5), compared with DX series.
- 5mm tall. Max. thin profile (H-shaped).
- Miniaturized but can encase up to 0.47F in φ11.5 case, and 1.5F in φ19.0 case.
- It excels in rapid charge.
- Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, general electronic device, and others.

Low resistance

DXN ⇦ DX

Marking color : White print on an indigo sleeve

Specifications

Item	Performance
Category temperature range (℃)	−25 to +70
Tolerance at rated capacitance (%)	−20 to +80
Internal resistance at 1 kHz	
Characteristics at high and low temperature	
Endurance (70℃)	
Shelf life (70℃)	Test time : 1000 hours ; Same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)

Internal resistance at 1 kHz:

Rated capacitance (F)	0.047	0.1	0.22	0.33	0.47	0.47	1	1.5
Internal resistance (Ω Max.)	25	25	25	25	25(φ11.5)	20(φ19.0)	20	20

Characteristics at high and low temperature:

Percentage of capacitance change	Within ±30% of the value at 20℃
Internal resistance	Five times or less of the value at 20℃

Endurance (70℃):

Test time	1000 hours
Percentage of capacitance change	Within ±30% of the initial measured value
Internal resistance	Four times or less of the initial specified value

Outline Drawing

Unit : mm

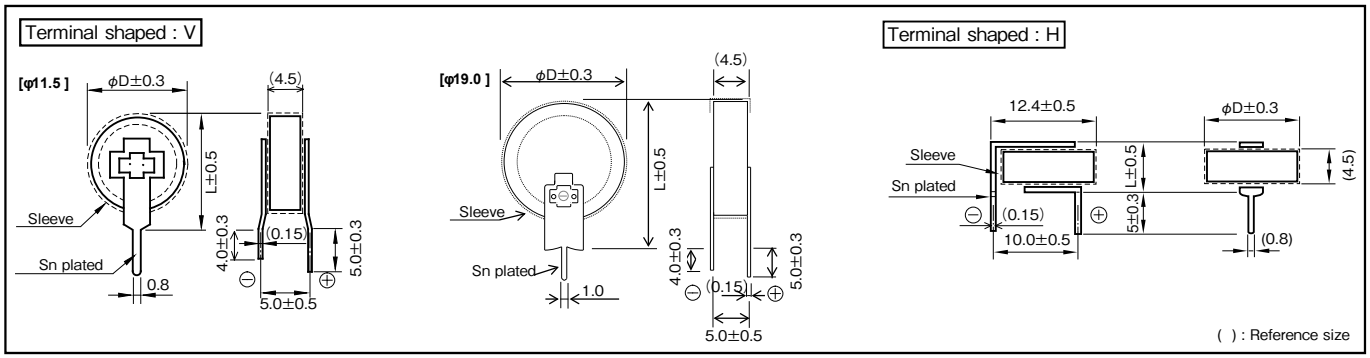

Part numbering system (example : 5.5V0.22F)

DXN	—	5R5	□	224	□	U
Series code		Max.operating voltage symbol	Terminal code	Rated Capacitance symbol	Additional symbol	

Part number is refer to following table.

Note

Do not apply external force to products or terminals as stress such as twisting, bending, pushing, or falling of such products or terminals may remove the terminals, resulting in an open/short circuit or liquid leakage.
Avoid applying excessive heat to capacitors during heating of an adhesive curing oven.
For details, refer to the precautions in use of DYNACAP.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
5.5	0.047	DXN-5R5V473U	11.5×13.0
		DXN-5R5H473U	11.5× 5.0
5.5	0.1	DXN-5R5V104U	11.5×13.0
		DXN-5R5H104U	11.5× 5.0
5.5	0.22	DXN-5R5V224U	11.5×13.0
		DXN-5R5H224U	11.5× 5.0
5.5	0.33	DXN-5R5V334U	11.5×13.0
		DXN-5R5H334U	11.5× 5.0
5.5	0.47	DXN-5R5V474SU	11.5×13.0
		DXN-5R5H474SU	11.5× 5.0
		DXN-5R5V474U	19.0×20.5
5.5	1	DXN-5R5V105U	19.0×20.5
5.5	1.5	DXN-5R5V155U	19.0×20.5

∗It can discharge with 1.5 times as much current (mA) as rated capacitance.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

ELNA®

5.5V Miniaturized High Temperature Capacitors

GREEN CAP 85℃

- High temperature type of Series DX.
- 5mm tall. Max. thin profile (H-shaped).
- Miniaturized but can encase up to 0.33F in φ11.5 case, and 1.0F in φ19.0 case.
- Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, general electronic device, and others.

High temperature

DXJ ⇦ DX

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−10 to +85
Tolerance at rated capacitance (%)	−20 to +80
Internal resistance at 1 kHz	
Characteristics at high and low temperature	
Endurance (85℃)	
Shelf life (85℃)	Test time : 1000 hours ; Same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)

Internal resistance at 1 kHz:

Rated capacitance (F)	0.047	0.1	0.22	0.33	1
Internal resistance (Ω Max.)	200	150	150	150	75

Characteristics at high and low temperature:

Percentage of capacitance change	Within ±30% of the value at 20℃
Internal resistance	Four times or less of the initial specified value.

Endurance (85℃):

Test time	1000 hours
Percentage of capacitance change	Within ±30% of the initial measured value
Internal resistance	Four times or less of the initial specified value.

Outline Drawing

Unit : mm

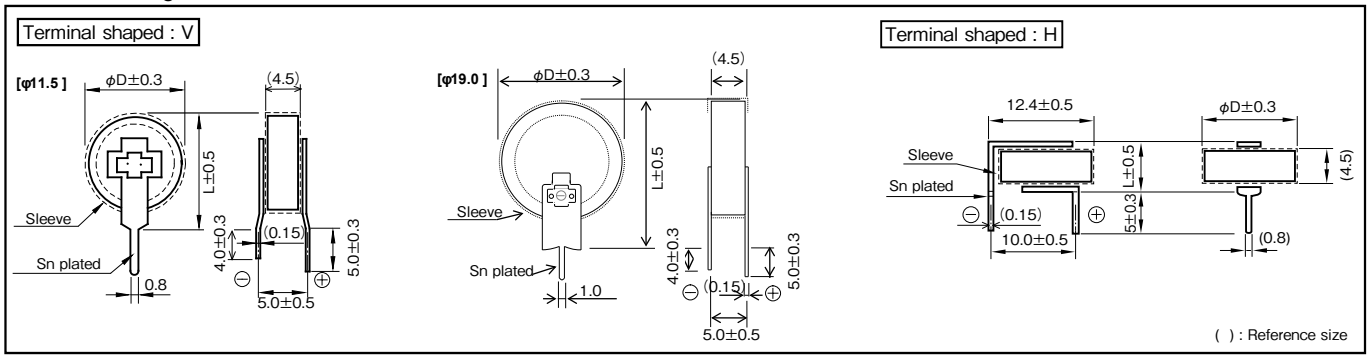

Part numbering system (example : 5.5V0.22F)

DXJ	—	5R5	☐	224	☐	U
Series code		Max.operating voltage symbol	Terminal code	Rated Capacitance symbol	Additional symbol	

Part number is refer to following table.

Note

Do not apply external force to products or terminals as stress such as twisting, bending, pushing, or falling of such products or terminals may remove the terminals, resulting in an open/short circuit or liquid leakage.
Avoid applying excessive heat to capacitors during heating of an adhesive curing oven.
For details, refer to the precautions in use of DYNACAP.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
5.5	0.047	DXJ-5R5V473U	11.5×13.0
		DXJ-5R5H473U	11.5× 5.0
5.5	0.1	DXJ-5R5V104U	11.5×13.0
		DXJ-5R5H104U	11.5× 5.0
5.5	0.22	DXJ-5R5V224U	11.5×13.0
		DXJ-5R5H224U	11.5× 5.0
5.5	0.33	DXJ-5R5V334U	11.5×13.0
		DXJ-5R5H334U	11.5× 5.0
5.5	1	DXJ-5R5V105U	19.0×20.5

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

3.6V Miniaturized Low ESR High Temperature Capacitors

GREEN CAP | 85°C

- Long life of 3.6V 2000 hours, low ESR in DX series and this size.
- 5mm tall. Max. thin profile (H-shaped).
- Wider temperature range (−25 to +85°C) than battery.
- Miniaturized but can encase up to 0.47F in φ11.5 case, and 1.0F in φ19.0 case.
- It excels in rapid charge.
- Ideal for backing up of CMOS's, IC's of camera, microcomputers, RAM's, RTC's and the like used in audio, general electronic device, and others.

Low voltage
High temperature

DXS ⇦ DXN

Marking color : White print on a black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−25 to +85
Tolerance at rated capacitance (%)	−20 to +80
Internal resistance at 1 kHz	
Characteristics at high and low temperature	
Endurance (85℃)	
Shelf life (85℃)	Test time : 1000 hours ; Same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)

Internal resistance at 1 kHz:

Rated capacitance (F)	0.047	0.1	0.22	0.33	0.47	0.47	1
Internal resistance (Ω Max.)	25	25	25	25	25 (φ11.5)	20 (φ19.0)	20

Characteristics at high and low temperature:

Percentage of capacitance change	Within ±30% of the value at 20℃
Internal resistance	Five times or less of the value at 20℃

Endurance (85℃):

Test time	2000 hours (φ11.5 0.47F : 1000 hours)
Percentage of capacitance change	Within ±30% of the initial measured value
Internal resistance	Four times or less of the initial specified value

Outline Drawing

Unit : mm

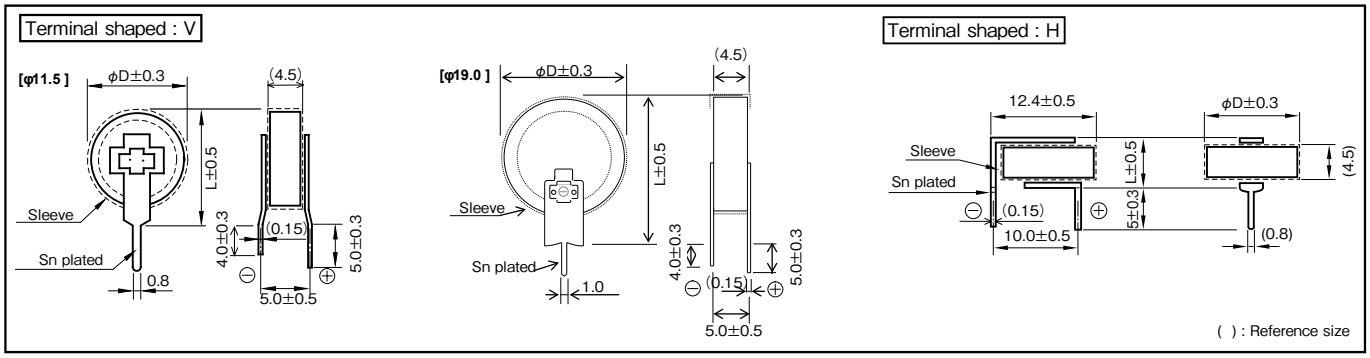

Part numbering system (example : 3.6V0.22F)

DXS	—	3R6	☐	224	☐	U
Series code		Max.operating voltage symbol	Terminal shaped	Rated capacitance symbol	Additional symbol	

Part number is refer to following table.

Note

Do not apply external force to products or terminals as stress such as twisting, bending, pushing, or falling of such products or terminals may remove the terminals, resulting in an open/short circuit or liquid leakage.
Avoid applying excessive heat to capacitors during heating of an adhesive curing oven.
For details, refer to the precautions in use of DYNACAP.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
3.6	0.047	DXS-3R6V473U	11.5×13.0
		DXS-3R6H473U	11.5× 5.0
3.6	0.1	DXS-3R6V104U	11.5×13.0
		DXS-3R6H104U	11.5× 5.0
3.6	0.22	DXS-3R6V224U	11.5×13.0
		DXS-3R6H224U	11.5× 5.0
3.6	0.33	DXS-3R6V334U	11.5×13.0
		DXS-3R6H334U	11.5× 5.0
3.6	0.47	DXS-3R6V474SU	11.5×13.0
		DXS-3R6H474SU	11.5× 5.0
		DXS-3R6V474U	19.0×20.5
3.6	1	DXS-3R6V105U	19.0×20.5

∗It can discharge with 1.5 times as much current (mA) as rated capacitance.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

ELNA®

High Temperature Capacitors

GREEN CAP | 85°C

- High temperature tolerant (−25 to +85℃) and highly reliable.
- Ideal for backing up of CMOS IC's, microcomputers, RAM's, RTC's for smart meter, outdoor equipment, industrial.

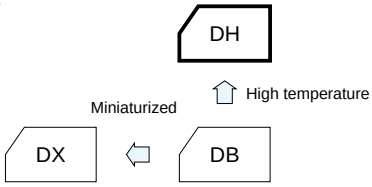

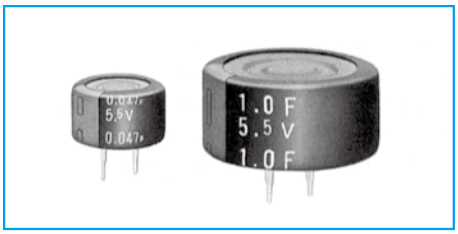

Marking color : White print on an indigo sleeve

Specifications

Item	Performance
Category temperature range (℃)	−25 to +85
Tolerance at rated capacitance (%)	−20 to +80
Internal resistance at 1 kHz	
Characteristics at high and low temperature	
Endurance (85℃)	
Shelf life (85℃)	Test time : 1000 hours ; Same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)

Rated capacitance (F)	0.047	0.1	0.22	0.47	0.68	1
Internal resistance (Ω Max.)	300	200	120	50	50	30

Percentage of capacitance change	Within ±30% of the value at 20℃
Internal resistance	Five times or less of the value at 20°C

Test time	1000 hours
Percentage of capacitance change	Within ±30% of the initial measured value
Internal resistance	Four times or less of the initial specified value

Outline Drawing

Unit : mm

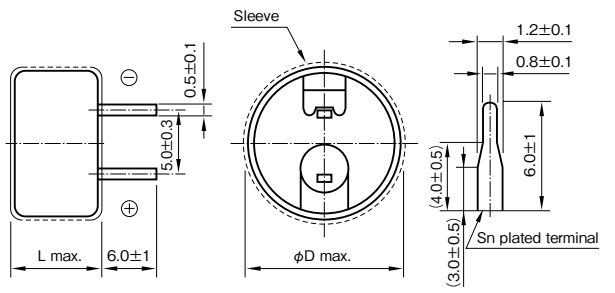

( ) : Reference size

Part numbering system (example : 5.5V0.22F)

DH	—	5R5	D	224	T
Series code		Max.operating voltage symbol		Rated capacitance symbol	

Part number is refer to following table.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
5.5	0.047	DH-5R5D473T	13.5×9.5
5.5	0.1	DH-5R5D104T	13.5×9.5
5.5	0.22	DH-5R5D224T	13.5×9.5
5.5	0.47	DH-5R5D474T	21.5×9.5
5.5	0.68	DH-5R5D684T	21.5×9.5
5.5	1	DH-5R5D105T	21.5×9.5

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

5.5V Wide Temperature Range Capacitors

GREEN CAP | 85°C

- It is a category temperature range larger than battery.
- φ13.5 size can encase up to 0.22F, φ21.5 size can encase up to 1.0F.
- It excels in rapid charge.
- Ideal for backing up of CMOS IC's, microcomputers, RAM's, RTC's for smart meter, outdoor equipment, auto motive and industrial.

Wide temperature range

DHL ⇦ DH

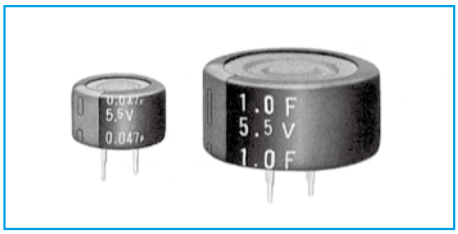

Marking color : White print on an indigo sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +85
Tolerance at rated capacitance (%)	−20 to +80
Internal resistance at 1 kHz	
Characteristics at high and low temperature	
Endurance (85℃)	
Shelf life (85℃)	Test time : 1000 hours ; Same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)

Internal resistance at 1 kHz:

Rated capacitance (F)	0.047	0.1	0.22	0.47	0.68	1
Internal resistance (Ω Max.)	40	40	40	20	20	20

Characteristics at high and low temperature:

Percentage of capacitance change	Within ±30% of the value at 20℃
Internal resistance	−40℃ : Seven times or less of the value at 20℃ 85℃ : Five times or less of the value at 20℃

Endurance (85℃):

Test time	1000 hours
Percentage of capacitance change	Within ±30% of the initial measured value
Internal resistance	Four times or less of the initial specified value

Outline Drawing

Unit : mm

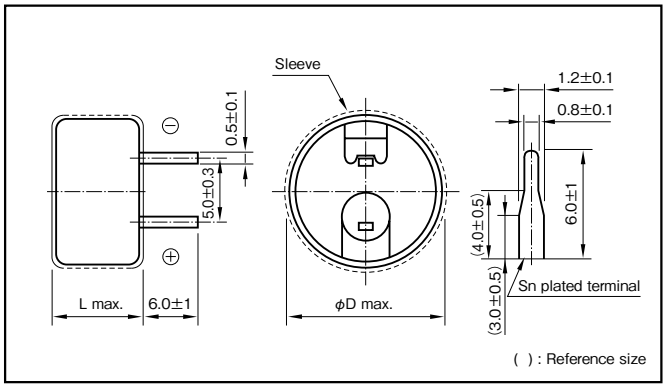

Part numbering system (example : 5.5V0.22F)

DHL	—	5R5	D	224	T
Series code		Rated voltage symbol		Rated capacitance symbol	

Part number is refer to following table.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
5.5	0.047	DHL-5R5D473T	13.5×9.5
5.5	0.1	DHL-5R5D104T	13.5×9.5
5.5	0.22	DHL-5R5D224T	13.5×9.5
5.5	0.47	DHL-5R5D474T	21.5×9.5
5.5	0.68	DHL-5R5D684T	21.5×9.5
5.5	1	DHL-5R5D105T	21.5×9.5

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

5.5V High Temperature, Long Life Capacitors

GREEN CAP | 85°C

- Guarantees 3000 hours at 85℃, 5.5V (10 years at room temperature).
- It is a category temperature range larger than battery.
- It excels in rapid charge.
- Ideal for backing up of CMOS IC's, microcomputers, RAM's, RTC's for smart meter, outdoor equipment, auto motive and industrial.

Long Life

DHC ⇦ DH

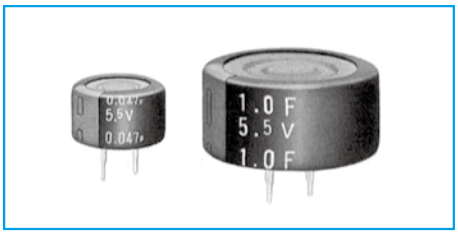

Marking color : White print on a Black sleeve

Specifications

Item	Performance
Category temperature range (℃)	−25 to +85
Tolerance at rated capacitance (%)	−20 to +80
Internal resistance at 1 kHz	

Rated capacitance (F)	0.047	0.1	0.22	0.47	0.68	1
Internal resistance (Ω Max.)	300	200	120	50	50	30

Characteristics at high and low temperature	
Percentage of capacitance change	Within ±30% of the value at 20℃
Internal resistance	Five times or less of the value at 20℃

Endurance (85℃)	
Test time	3000 hours
Percentage of capacitance change	Within ±30% of the initial measured value
Internal resistance	Four times or less of the initial specified value

Shelf life (85℃)	Test time : 1000 hours ; Same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)

Outline Drawing

Unit : mm

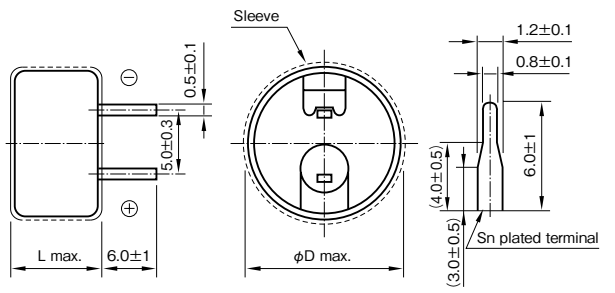

( ) : Reference size

Part numbering system (example : 5.5V0.22F)

DHC	—	5R5	D	224	T
Series code		Rated voltage symbol		Rated capacitance symbol	

Part number is refer to following table.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
5.5	0.047	DHC-5R5D473T	13.5×9.5
5.5	0.1	DHC-5R5D104T	13.5×9.5
5.5	0.22	DHC-5R5D224T	13.5×9.5
5.5	0.47	DHC-5R5D474T	21.5×9.5
5.5	0.68	DHC-5R5D684T	21.5×9.5
5.5	1	DHC-5R5D105T	21.5×9.5

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

DC,DCK-614,621

Coin Cell Capacitors

GREEN CAP | 60℃/70℃

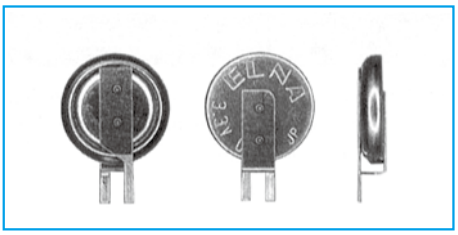

- High reliability, Safe and unlike secondarybatteries, environmentally friendly devices.
- Unlike batteries, excellent charge and discharge characteristics with no chemical reactions.
- 1.8mm height 614type made lineup in the DC, DCK Series.
- Ideal for backing up of portable device etc.



Specifications

Item	Performance	
Series Name	Series DC	Series DCK
Max. operating voltage (V)	2.5	3.3
Category temperature range (℃)	−25 to +70	−10 to +60
Tolerance at rated capacitance (%)	−20 to +80	−20 to +80
Internal resistance (Ω) at 1 kHz	Size code: 614 / 621 Rated capacitance (F): 0.2 / 0.33 Internal resistance (ΩMax.): 100 / 100	Size code: 614 / 621 Rated capacitance (F): 0.2 / 0.4 Internal resistance (ΩMax.): 200 / 200
Characteristics at high and low temperature	Size code: 614 / 621 Percentage of capacitance change: Within ±30% of the value at 20℃ / Within ±30% of the value at 20℃ Internal resistance: Five times or less of the value at 20℃ / Five times or less of the value at 20℃	Size code: 614 / 621 Percentage of capacitance change: Within ±50% of the value at 20℃ / Within ±50% of the value at 20℃ Internal resistance: Five times or less of the initial specified value. / Five times or less of the value at 20℃
Endurance	Size code: 614 / 621 Test time and temp: 70℃ 1000 hours / 70℃ 500 hours Percentage of capacitance change: Within ±30% of the initial measured value / Within ±40% of the initial measured value Internal resistance: 1kΩ Max. / 400Ω Max.	Size code: 614 / 621 Test time and temp: 60℃ 1000 hours / 60℃ 500 hours Percentage of capacitance change: Within ±30% of the initial measured value / Within ±40% of the initial measured value Internal resistance: 2kΩ Max. / 800Ω Max.
Shelf life	Same as endurance.	Same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)	

Outline Drawing

Unit : mm

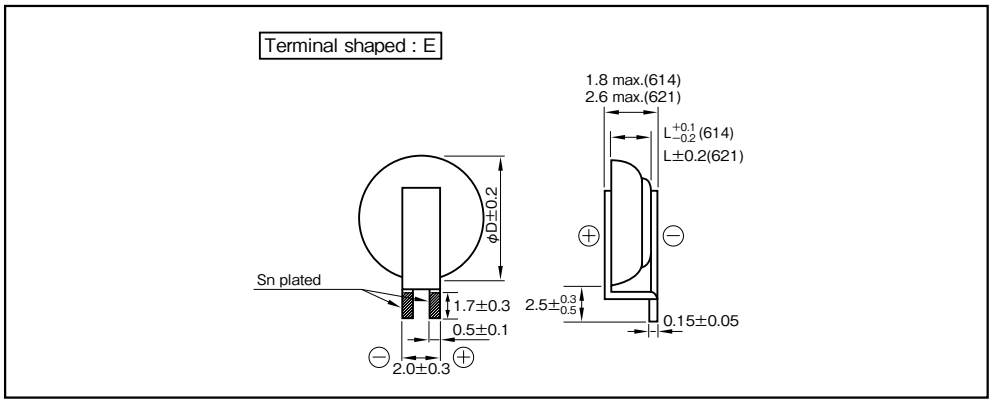

・Soldering condition of DC or DCK series is only soldering iron. (Soldering conditions are described on page 236.)

Part numbering system (example : 614,2.5V0.2F, terminal shaped : E)

DC	—	2R5	E	204	T	614	—	E
Series code		Max. operating voltage symbol		Rated capacitance symbol	Additional symbol			

Part number is refer to following table.

Part numbering system (example : 621, 3.3V0.4F, terminal shaped : E)

DCK	—	3R3	E	404	T	—	E
Series code		Max. operating voltage symbol		Rated capacitance symbol	Additional symbol		

Part number is refer to following table.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
2.5	0.2	DC-2R5E204T614-E	6.8×1.4
3.3	0.2	DCK-3R3E204T614-E	6.8×1.4
2.5	0.33	DC-2R5E334T-E	6.8×2.1
3.3	0.4	DCK-3R3E404T-E	6.8×2.1

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

DSK-414 ELECTRIC DOUBLE LAYER CAPACITORS "DYNACAP"

ELNA®

Coin Cell Capacitors

GREEN CAP | SMD | 70℃

- Reflow soldering method available.
- High reliability, Safe and unlike secondarybatteries, environmentally friendly devices.
- Unlike batteries, exceilent charge and discharge characteristics with no chemical reactions.
- ϕ4.8×1.71Lmm Max height type made lineup in the DSK series.
- Ideal for backing up of portable device etc.

Low profile

DSK (414) ⇦ DSK (614)

Specifications

Item	Performance	
Series name	series DSK	
Max. operating voltage (V)	3.3	
Category temperature range (℃)	−10 to +70	
Tolerance at rated capacitance (%)	−20 to +80	
Rated capacitance (F)	0.07	
Internal resistance (Ω Max.) at 1 kHz	100	
Characteristics at high and low temperature	Percentage of capacitance change	Within ±50% of the value at 20℃
	Internal resistance	Ten times or less of the value at 20℃
Endurance (70℃)	Test time	500 hours
	Percentage of capacitance change	Within ±30% of the initial measured value
	Internal resistance	5kΩ Max.
Shelf life (70℃)	Test time : 500 hours ; Same as endurance.	
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)	

Outline Drawing

Unit : mm

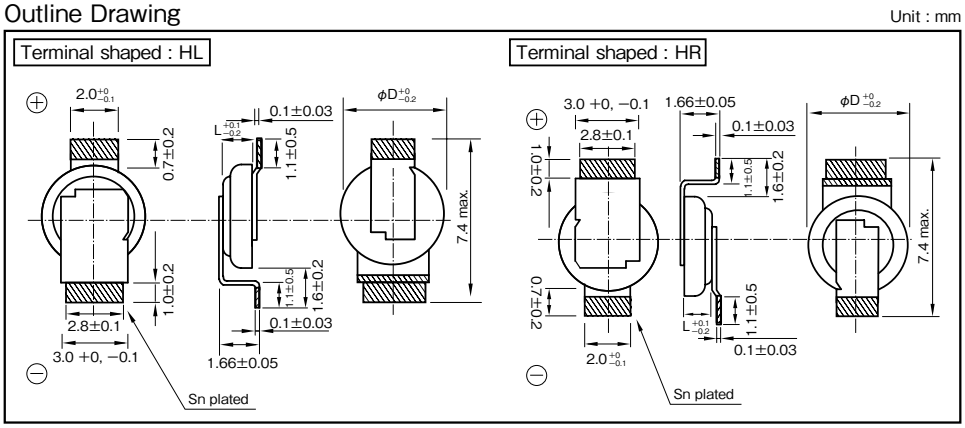

Recommended land pattern size

Unit : mm



Thickness of solder paste: 0.15mm
Polarity changes to terminal form.

∗Please consult with us about other terminal form

Part numbering system (3.3V0.07F, terminal shaped : HL)

DSK	—	3R3	H	703	T414	—	HL	L
Series code		Max.operating voltage symbol		Rated capacitance symbol	Additional symbol		Terminal shaped	Taping symbol

Part number is refer to following table.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	ϕD×L (mm)
3.3	0.07	DSK-3R3H703T414-HLL	4.8×1.4
		DSK-3R3H703T414-HRL	

∗Soldering conditions are described on page 235.

EDLC

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

ELECTRIC DOUBLE LAYER CAPACITORS "DYNACAP"

DS,DSK-614,621

Coin Cell Capacitors

GREEN CAP | SMD | 60°C / 70°C

- Reflow soldering method available.
- High reliability, Safe and unlike secondarybatteries, environmentally friendly devices.
- Unlike batteries, excellent charge and discharge characteristics with no chemical reactions.
- 1.8Lmm height type 614 made lineup in the DS, DSK series.
- Ideal for backing up of portable device etc.



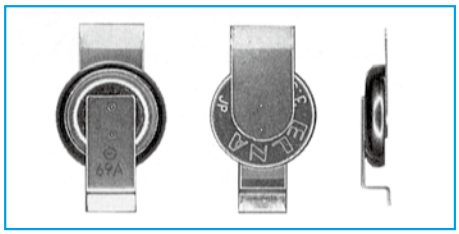

Specifications

Item	Performance	
Series Name	Series DS	Series DSK
Max.operating voltage (V)	2.5	3.3
Category temperature range (℃)	−25 to +70	−10 to +60
Tolerance at rated capacitance (%)	−20 to +80	−20 to +80
Internal resistance (Ω) at 1 kHz		
Characteristics at high and low temperature		
Endurance		
Shelf life	Same as endurance.	Same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)	

Internal resistance (Ω) at 1 kHz:

Size code	614	621
Rated capacitance (F)	0.2	0.33
Internal resistance (Ω Max.)	100	100

Size code	614	621
Rated capacitance (F)	0.2	0.33
Internal resistance (Ω Max.)	200	200

Characteristics at high and low temperature:

Size code	614	621
Percentage of capacitance change	Within ±30% of the value at 20℃	Within ±30% of the value at 20℃
Internal resistance	Five times or less of the value at 20℃	Five times or less of the value at 20℃

Size code	614	621
Percentage of capacitance change	Within ±50% of the value at 20℃	Within ±50% of the value at 20℃
Internal resistance	Five times or less of the initial specified value	Five times or less of the value at 20℃

Endurance:

Size code	614	621
Test time and temp.	70℃ 1000 hours	70℃ 500 hours
Percentage of capacitance change	Within ±30% of the initial measured value	Within ±30% of the initial measured value
Internal resistance	1kΩ Max.	400Ω Max.

Size code	614	621
Test time and temp.	60℃ 1000 hours	60℃ 500 hours
Percentage of capacitance change	Within ±30% of the initial measured value	Within ±30% of the initial measured value
Internal resistance	2kΩ Max.	800Ω Max.

Outline Drawing

Unit : mm

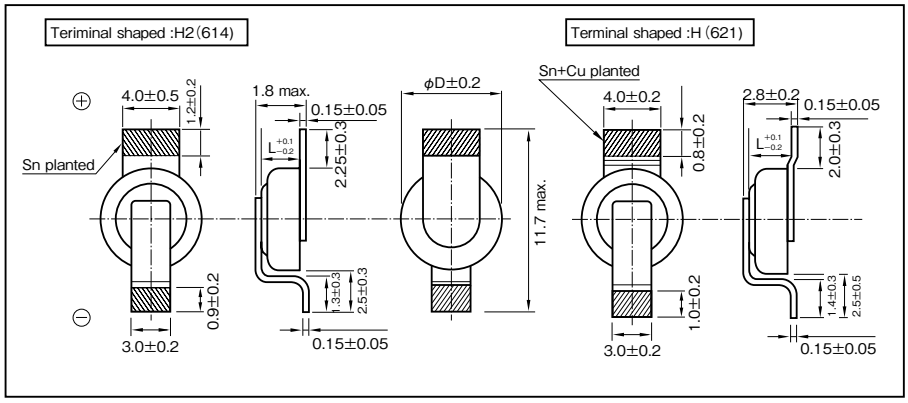

※Please consult with us about other terminal form.

Recommended land pattern size

Unit : mm

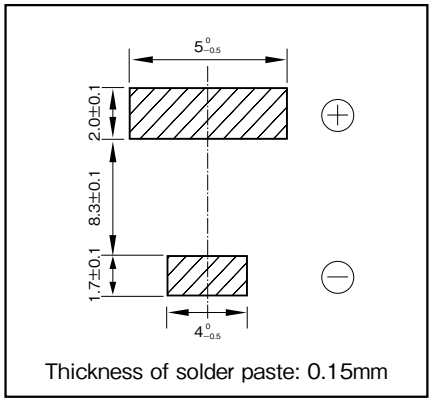

Thickness of solder paste: 0.15mm

Part numbering system (example : 614, 2.5V0.2F, terminal shaped : H2)							
DS	—	2R5	H	204	T614	— H2	L
Series code		Max.operating voltage symbol		Rated capacitance symbol	Additional symbol	Terminal shaped	Taping symbol

Part number is refer to following table.

Part numbering system (example:621, 3.3V0.33F, terminal shaped:H)							
DSK	—	3R3	H	334	U	— H	L
Series code		Max.operating voltage symbol		ated capacitance symbol	Additional symbol	Terminal shaped	Taping symbol

Part number is refer to following table.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	ELNA Parts No.	φD×L (mm)
2.5	0.2	DS-2R5H204T614-H2L	6.8×1.4
3.3	0.2	DSK-3R3H204T614-H2L	6.8×1.4
2.5	0.33	DS-2R5H334U-HL	6.8×2.1
3.3	0.33	DSK-3R3H334U-HL	6.8×2.1

＊Soldering conditions are described on page 235.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard, Large Capacitance Type Capacitors

GREEN CAP | 60°C / 70°C | 2.5V / 2.7V

- Environmentally Friendly : without environmentally hazardous substances such as Cd or Pb.
- Unlike batteries, excellent charge and discharge characteristics with no chemical reactions.

Large capacitance

DZH ⇦ DZ

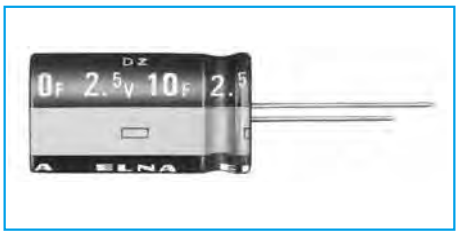

Marking color : White print on a black sleeve

Specifications

Item	Performance	
Series name	Series DZ	Series DZH
Category temperature range (℃)	−25 to +70	−25 to +60
Tolerance at rated capacitance (%)	−20 to +80	−20 to +80
Internal resistance at 1kHz	Refer to the following page	
Characteristics at high and low temperature	Percentage of capacitance change: Within ±30% of the value at 20℃ Internal resistance: Five times or less of the value at 20℃	Percentage of capacitance change: Within ±30% of the value at 20℃ Internal resistance: Eight times or less of the value at 20℃
Endurance	Test temperature: 70℃ Test time: 1000 hours Percentage of capacitance change: Within ±30% of the initial measured value Internal resistance: Four times or less of the initial specified value	Test temperature: 60℃ Test time: 2000 hours Percentance of capacitance change: Within ±30% of the initial measured value Internal resistance: Four times or less of the initial specified value
Shelf life	Same as endurance	Same as endurance
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)	

Outline Drawing

Unit : mm

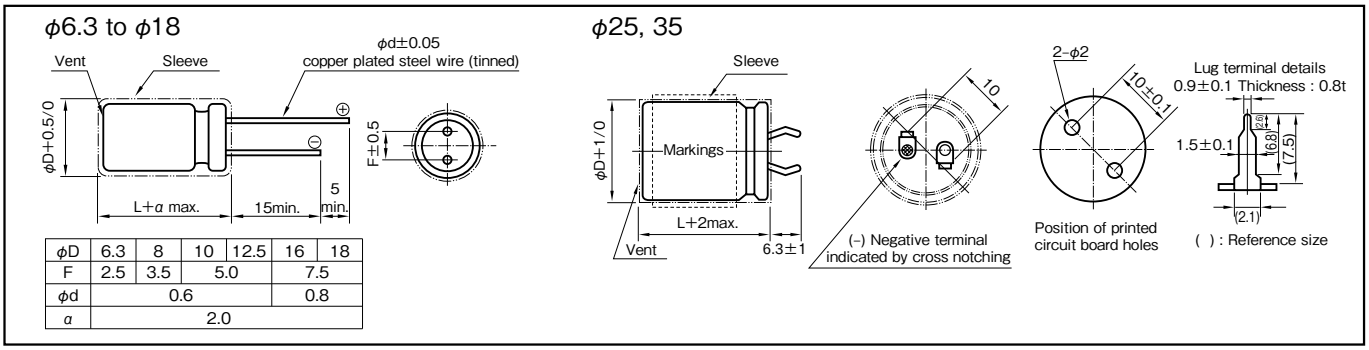

φD	6.3	8	10	12.5	16	18
F	2.5	3.5	5.0		7.5	
φd	0.6				0.8	
α	2.0					

Part numbering system (example : 2.5V10F)

DZ	—	2R5	D	106	(Z6)(S)	T	—	⬚
Series code		Max. operating voltage symbol		Rated capacitance symbol	Casing symbol			Taping (Forming) symbol

Part number is refer to the following page.

EDLC

NOTE : Design, Specifications are subject to change without notice. It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings (Series DZ 2.5V)

Max. operating voltage (V)	Rated capacitance (F)	Max. Leakage Current (mA) after 24h	ELNA Parts No.	φD × L (mm)	Internal resistance (Ω max.) at 1kHz	Internal resistance (mΩ) at 1kHz (measurement value)
2.5	1	0.1	DZ-2R5D105F4T	6.3 × 14	1.0	400
2.5	1	0.1	DZ-2R5D105G3T	8 × 12	1.0	200
2.5	2.7	0.2	DZ-2R5D275G5ST	8 × 20	0.5	150
2.5	3.3	0.2	DZ-2R5D335H5T	10 × 20	0.3	90
2.5	4.7	0.3	DZ-2R5D475H5T	10 × 20	0.2	80
2.5	5.6	0.3	DZ-2R5D565H5T	10 × 20	0.2	70
2.5	6.8	0.4	DZ-2R5D685H6T	10 × 25	0.2	60
2.5	10	0.5	DZ-2R5D106H8T	10 × 35	0.2	40
2.5	10	0.5	DZ-2R5D106Z6ST	12.5 × 25	0.2	40
2.5	15	0.7	DZ-2R5D156Z8ST	12.5 × 35	0.2	35
2.5	15	0.7	DZ-2R5D156J5T	16 × 20	0.2	35
2.5	22	0.8	DZ-2R5D226J6T	16 × 25	0.2	30
2.5	33	0.8	DZ-2R5D336J8T	16 × 35.5	0.2	30
2.5	40	0.8	DZ-2R5D406K9T	18 × 40	0.2	30
2.5	50	1.0	DZ-2R5D506T	25 × 40	0.08	20
2.5	100	1.0	DZ-2R5D107S37T	25 × 50	0.08	15
2.5	200	2.0	DZ-2R5D207S57T	35 × 50	0.08	15

We tailor packaged product in series and parallel arrangements according to voltage and capacitance as required.

Standard Ratings (Series DZ 2.7V)

Max. operating voltage (V)	Rated capacitance (F)	Max. Leakage Current (mA) after 24h	ELNA Parts No.	φD × L (mm)	Internal resistance (Ω max.) at 1kHz	Internal resistance (mΩ) at 1kHz (measurement value)
2.7	1	0.2	DZ-2R7D105F4T	6.3 × 14	1.0	400
2.7	1	0.2	DZ-2R7D105G3T	8 × 12	1.0	200
2.7	2.7	0.3	DZ-2R7D275G5ST	8 × 20	0.5	150
2.7	3.3	0.3	DZ-2R7D335H5T	10 × 20	0.3	130
2.7	4.7	0.4	DZ-2R7D475H5T	10 × 20	0.2	80
2.7	5.6	0.4	DZ-2R7D565H5T	10 × 20	0.2	70
2.7	6.8	0.5	DZ-2R7D685H6T	10 × 25	0.2	60
2.7	10	0.6	DZ-2R7D106H8T	10 × 35	0.2	40
2.7	10	0.6	DZ-2R7D106Z6ST	12.5 × 25	0.2	40
2.7	15	0.8	DZ-2R7D156Z8ST	12.5 × 35	0.2	35
2.7	15	0.8	DZ-2R7D156J6T	16 × 25	0.2	35
2.7	22	1.0	DZ-2R7D226J7T	16 × 31.5	0.2	30
2.7	33	1.0	DZ-2R7D336J9T	16 × 40	0.2	30

We tailor packaged product in series and parallel arrangements according to voltage and capacitance as required.

Standard Ratings (Series DZH 2.5V)

Max. operating voltage (V)	Rated capacitance (F)	Max. Leakage Current (mA) after 24h	ELNA Parts No.	φD × L (mm)	Internal resistance (Ω max.) at 1kHz	Internal resistance (mΩ) at 1kHz (measurement value)
2.5	22	0.8	DZH-2R5D226Z8ST	12.5 × 35	0.2	55
2.5	50	1.0	DZH-2R5D506K9T	18 × 40	0.08	30
2.5	100	2.0	DZH-2R5D107S35T	25 × 40	0.08	20
2.5	300	5.0	DZH-2R5D307S57T	35 × 50	0.08	15

We tailor packaged product in series and parallel arrangements according to voltage and capacitance as required.

ELNA®

High Power Type Capacitors

GREEN CAP | 70°C | Low ESR | 2.5V / 2.7V

- Low internal resistance allows boosting charge and heavy-current discharge. (ampere level)
- Environmentally Friendly : without environmentally hazardous substances such as Cd or Pb.
- Unlike batteries, excellent charge and discharge characteristics with no chemical reaction.

High power

DZN ⇦ DZ

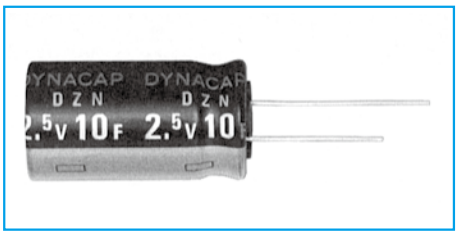

Marking color : White print on a blue sleeve

Specifications

Item	Performance
Category temperature range (℃)	−25 to +70
Tolerance at rated capacitance (%)	−20 to +80
Internal resistance	Refer to the following page
Characteristics at high and low temperature	Percentage of capacitance change: Within ±30% of the value at 20℃ Internal resistance: Five times or less of the value at 20℃
Endurance (70℃)	Test time: 1000 hours Percentage of capacitance change: Within ±30% of the initial measured value Internal resistance: Four times or less of the initial specified value
Shelf life (70℃)	Test time : 1000 hours ; Same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)

Outline Drawing

Unit : mm

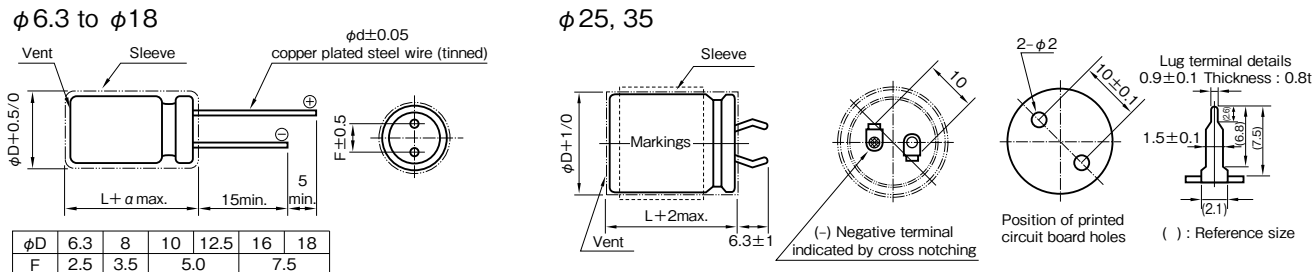

φD	6.3	8	10	12.5	16	18
F	2.5	3.5	5.0		7.5	
φd	0.6				0.8	
α	2.0					

Part numbering system (example : 2.5V10F)

DZN	—	2R5	D	106	(Z6)(S)	T	—	⬚
Series code		Max. operating voltage symbol		Rated capacitance symbol	Casing symbol			Taping (Forming) symbol

Part number is refer to the following page.

EDLC

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings (Series DZN 2.5V)

Max. operating voltage (V)	Rated capacitance (F)	Max. Leakage Current (mA) after 24h	ELNA Parts No.	φD × L (mm)	Internal resistance (Ω max.) at 1kHz	Internal DC resistance (mΩ Max.)
2.5	1	0.1	DZN-2R5D105F4T	6.3 × 14	0.4	1500
2.5	1	0.1	DZN-2R5D105G3T	8 × 12	0.3	1000
2.5	2.7	0.2	DZN-2R5D275G5ST	8 × 20	0.3	500
2.5	3.3	0.2	DZN-2R5D335H5T	10 × 20	0.1	400
2.5	4.7	0.3	DZN-2R5D475H5T	10 × 20	0.1	400
2.5	5.6	0.3	DZN-2R5D565H5T	10 × 20	0.1	350
2.5	6.8	0.4	DZN-2R5D685H6T	10 × 25	0.1	300
2.5	10	0.5	DZN-2R5D106H8T	10 × 35	0.1	200
2.5	10	0.5	DZN-2R5D106Z6ST	12.5 × 25	0.1	200
2.5	15	0.7	DZN-2R5D156Z8ST	12.5 × 35	0.1	150
2.5	15	0.7	DZN-2R5D156J5T	16 × 20	0.1	150
2.5	22	0.8	DZN-2R5D226J6T	16 × 25	0.1	120
2.5	33	0.8	DZN-2R5D336J8T	16 × 35.5	0.1	100
2.5	40	0.8	DZN-2R5D406K9T	18 × 40	0.1	75
2.5	50	1.0	DZN-2R5D506T	25 × 40	0.03	60
2.5	100	1.0	DZN-2R5D107S37T	25 × 50	0.03	50
2.5	200	2.0	DZN-2R5D207S57T	35 × 50	0.03	40

We tailor packaged product in series and parallel arrangements according to voltage and capacitance as required.

Standard Ratings (Series DZN 2.7V)

Max. operating voltage (V)	Rated capacitance (F)	Max. Leakage Current (mA) after 24h	ELNA Parts No.	φD × L (mm)	Internal resistance (Ω max.) at 1kHz	Internal DC resistance (mΩ Max.)
2.7	1	0.2	DZN-2R7D105F4T	6.3 × 14	0.4	1500
2.7	1	0.2	DZN-2R7D105G3T	8 × 12	0.3	1000
2.7	2.7	0.3	DZN-2R7D275G5ST	8 × 20	0.3	500
2.7	3.3	0.3	DZN-2R7D335H5T	10 × 20	0.2	470
2.7	4.7	0.4	DZN-2R7D475H5T	10 × 20	0.1	400
2.7	5.6	0.4	DZN-2R7D565H5T	10 × 20	0.1	350
2.7	6.8	0.5	DZN-2R7D685H6T	10 × 25	0.1	300
2.7	10	0.6	DZN-2R7D106H8T	10 × 35	0.1	200
2.7	10	0.6	DZN-2R7D106Z6ST	12.5 × 25	0.1	200
2.7	15	0.8	DZN-2R7D156Z8ST	12.5 × 35	0.1	150
2.7	15	0.8	DZN-2R7D156J6T	16 × 25	0.1	150
2.7	22	1.0	DZN-2R7D226J7T	16 × 31.5	0.1	120
2.7	33	1.0	DZN-2R7D336J9T	16 × 40	0.1	100

We tailor packaged product in series and parallel arrangements according to voltage and capacitance as required.

High Power, For Low Temperature Type Capacitors

GREEN CAP | 65°C | 2.7V | For −40°C

- For Low Temperature (−40°C).
- Environmentally Friendly : without environmentally hazardous substances such as Cd or Pb.
- Unlike batteries, excellent charge and discharge characteristics with no chemical reaction.

For low temperature

DU ⇦ DZN

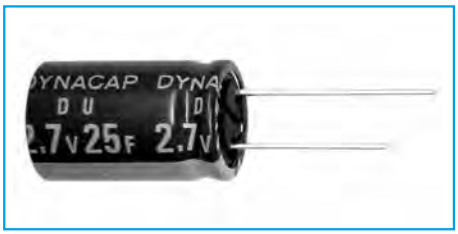

Marking color : White print on a brown sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +65
Tolerance at rated capacitance (%)	−20 to +80
Internal resistance	Refer to the Standard Ratings
Characteristics at high and low temperature	Percentage of capacitance change: Within ±30% of the value at 20℃ Internal resistance: Three times or less of the value at 20℃
Endurance (65℃)	Test time: 1000 hours Percentage of capacitance change: Within ±30% of initial measured value Internal resistance: Three times or less of the initial specified value
Shelf life (65℃)	Test time : 1000 hours ; same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)

Outline Drawing

Unit : mm

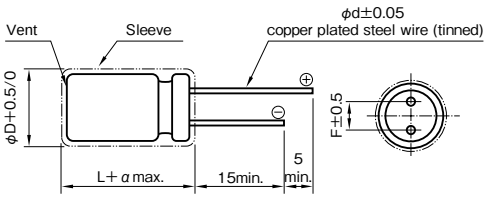

ϕD	8	10	12.5	16	18
F	3.5	5.0		7.5	
ϕd	0.6			0.8	
α	2.0				

Part numbering system (example : 2.7V10F)

DU	—	2R7	D	106	H7	T	—	⬚
Series code		Max. operating voltage symbol		Rated capacitance symbol	Casing symbol			Taping (Forming) symbol

Part number is refer to the following table.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	Max. Leakage Current (mA) after 24h	ELNA Parts No.	ϕD × L (mm)	Internal resistance (mΩ max.) at 1kHz	Internal DC resistance (mΩ Max.)
2.7	1	0.2	DU-2R7D105G3T	8 × 12	250	700
2.7	3.3	0.3	DU-2R7D335G5T	8 × 20	75	200
2.7	6.8	0.5	DU-2R7D685H5T	10 × 20	60	120
2.7	10	0.6	DU-2R7D106H7T	10 × 30	50	75
2.7	15	0.8	DU-2R7D156Z6T	12.5 × 25	35	60
2.7	25	1.0	DU-2R7D256J6T	16 × 25	25	42
2.7	33	1.0	DU-2R7D336J7T	16 × 31.5	20	35
2.7	50	1.5	DU-2R7D506K9T	18 × 40	14	25

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

High Power, For Low Temperature and High Voltage Tolerance Type Capacitors

GREEN CAP | 65°C/85°C | 3.0V/2.5V | For −40°C

- For Low Temperature (−40°C), High voltage tolerant (3.0V guaranteed).
- Environmentally Friendly ; without environmentally hazardous substances such as Cd or Pb.
- Unlike batteries, excellent charge and discharge characteristics with no chemical reaction.

High Voltage, High Temperature

DUK ⇦ DU

Marking color : White print on a brown sleeve

Specifications

Item	Performance
Category temperature range (℃)	−40 to +65
Expansion category temperature range (℃)	−40 to +85 (Applied voltage: 2.5 V or less)
Tolerance at rated capacitance (%)	−20 to +20
Internal resistance	Refer to the Standard Ratings
Characteristics at high and low temperature	Percentage of capacitance change: Within ±30% of the value at 20℃ Internal resistance: Three times or less of the value at 20℃
Endurance	Test temperature: 65℃; Test voltage: 3.0V; Test time: 1000 hours; Percentage of capacitance change: Within ±30% of the initial measured value; Internal resistance: Three times or less of the initial specified value Test temperature: 85℃; Test voltage: 2.5V; Test time: 1000 hours; Percentage of capacitance change: Within ±30% of the initial measured value; Internal resistance: Three times or less of the initial specified value
Shelf life (85℃)	Test time : 1000hours ; same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)

Outline Drawing

Unit : mm

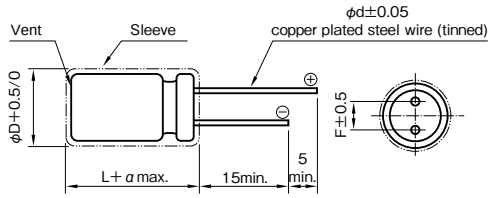

φD	8	10	16	18
F	3.5	5.0	7.5	
φd	0.6		0.8	
α	2.0			

Part numbering system (example : 3V10F)

DUK	—	3	D	106	H7	T	—	⬚
Series code		Max. operating voltage symbol		Rated capacitance symbol	Casing symbol			Taping (Forming) symbol

Part number is refer to the following table.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	Max. Leakage Current (mA) after 24h	ELNA Parts No.	φD × L (mm)	Internal resistance (mΩ max.) at 1kHz	Internal DC resistance (mΩ Max.)
3	1	0.2	DUK-3D105G3T	8 × 12	300	1500
3	3.3	0.3	DUK-3D335G5T	8 × 20	90	500
3	6.8	0.5	DUK-3D685H5T	10 × 20	70	250
3	10	0.6	DUK-3D106H7T	10 × 30	55	150
3	15	0.8	DUK-3D156H9T	10 × 40	40	120
3	25	1.0	DUK-3D256J6T	16 × 25	30	75
3	33	1.0	DUK-3D336J7T	16 × 31.5	25	65
3	50	1.5	DUK-3D506K9T	18 × 40	20	45

We tailor packaged product in series and parallel arrangements according to voltage and capacitance as required.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Packed Type Capacitors

GREEN CAP | 70°C | 5.0V

- High-voltage capacitor which connected DZN in series.
- Environmentally Friendly : without environmentally hazardous substances such as Cd or Pb.
- Unlike batteries, excellent charge and discharge characteristics with no chemical reaction.

High voltage

DZP ⇦ DZN

Marking color : White print on a blue sleeve

Specifications

Item	Performance
Category temperature range (℃)	−25 to +70
Tolerance at rated capacitance (%)	−20 to +80
Internal resistance at 1 kHz	Refer to the Standard Ratings
Characteristics at high and low temperature	Percentage of capacitance change: Within ±30% of the value at 20℃ Internal resistance: Five times or less of the value at 20℃
Endurance (70℃)	Test time: 1000 hours Percentage of capacitance change: Within ±30% of the initial measured value Internal resistance: Four times or less of the initial specified value
Shelf life (70℃)	Test time : 1000hours ; same as endurance.
Applicable standards	Conforms to JIS C5160-1 (IEC 62391-1)

Outline Drawing

Unit : mm

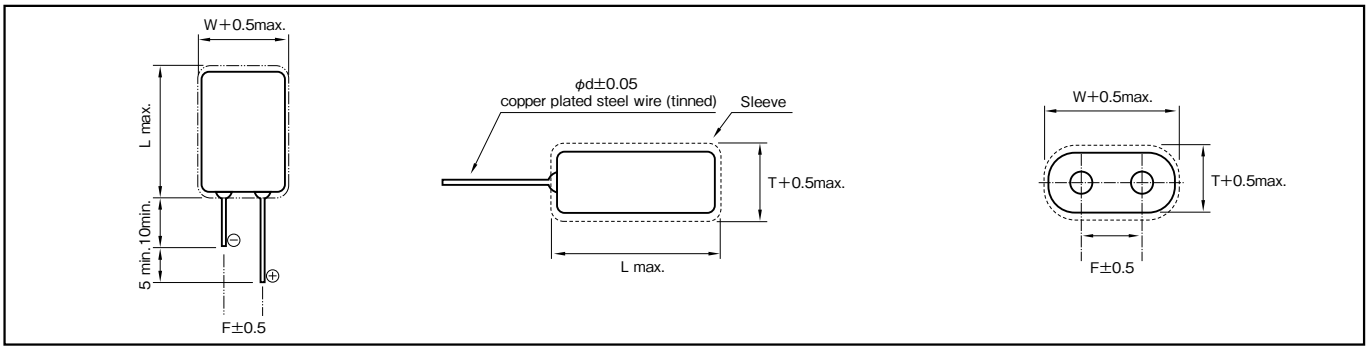

Part numbering system (example : 5.0V0.47F)

DZP	—	5	V	474	G3( )	NT(S1)□
Series code		Max. operating voltage symbol		Rated capacitance symbol	Casing symbol	Additional code

Part number is refer to the following table.

Standard Ratings

Max. operating voltage (V)	Rated capacitance (F)	Max. Leakage Current (mA) after 24h	ELNA Parts No.	T × W × L (mm)	ϕd	F	Internal resistance (Ω max.) at 1kHz	Internal resistance (mΩ) at 1kHz (measurement value)
5.0	0.47	0.2	DZP-5V474G3NTS1A	8.5 × 17.0 × 16.0	0.6	5.1	0.6	300
			DZP-5V474G3NTS1B			12.1		
5.0	1.0	0.3	DZP-5V105G5SNTA	8.5 × 17.0 × 24.0	0.6	5.1	0.6	240
			DZP-5V105G5SNTB			12.1		
5.0	1.5	0.4	DZP-5V155G5SNTA	8.5 × 17.0 × 24.0	0.6	5.1	0.6	200
			DZP-5V155G5SNTB			12.1		
5.0	3.3	0.8	DZP-5V335H6NTS1A	10.5 × 21.0 × 29.0	0.6	5.5	0.2	100
			DZP-5V335H6NTS1B			15.5		
5.0	4.7	1.0	DZP-5V475H8NTS1A	10.5 × 21.0 × 39.0	0.6	5.5	0.2	70
			DZP-5V475H8NTS1B			15.5		

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

1 Description of Electric Double Layer Capacitor

1-1 Basic Concepts

Generally capacitors are constructed with a dielectric placed between opposed electrodes, functioning as capacitors by accumulating charges in the dielectric material. Aluminum electrolytic and tantalum electrolytic capacitors, for example, use an aluminum oxide film and a tantalum oxide film as the dielectric, respectively.

On the other hand, Electric Double Layer Capacitors have no visible dielectric in a general sense but utilize the state referred to as the electric double layer, which is developed naturally on the interface between substances, as the function of dielectric.

1-2 Operating Principle

The Electric Double Layer represents the state in which positive and negative charges exist at a very short distance on the boundary where contact occurs between two different substances (e.g. solid and liquid). By externally applying a voltage below a certain voltage to the boundary, higher charges can be accumulated. Accordingly, charge and discharge of electric double layer capacitors utilize adsorption and desorption of ions to the ionic adsorption layer (Electric Double Layer) formed on the electrode surface of the activated carbon used for electrodes.

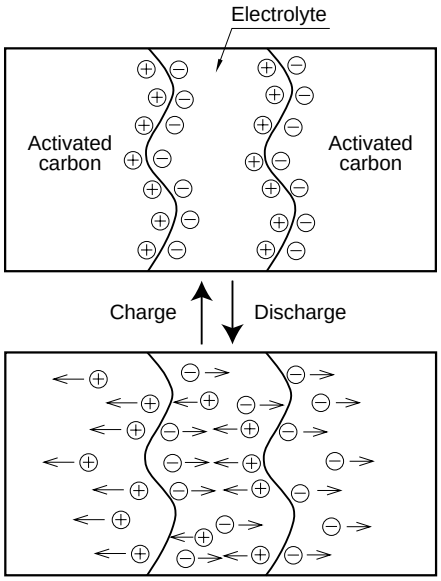

Fig.1 Schematic of Principle of Electric Double Layer Capacitor

Applying DC voltage externally across the electrodes of the Electric Double Layer allows almost no passage of current up to a certain voltage, exhibiting a condition like insulation.
However, the application of voltages exceeding the certain voltage causes electrolysis to occur in the electrolyte, resulting in abrupt passage of current.

This voltage determines the resistance of voltage of an Electric Double Layer Capacitor. We use an organic electrolyte and its standard electrolysis occurs at the voltage of about 2.5 to 3V.

1-3 Advantages and Disadvantages of Electric Double Layer Capacitor

[Advantages]

(1) Small size and capacitance in farads (F) available by utilizing the activated carbon electrode with a large surface area
(2) No special charging circuit and constrains during discharge are required.
(3) No effect on the life through overcharging and overdischarging
(4) Environmentally clean energy

[Disadvantage]

(1) The life is limited due to the use of electrolyte.
(2) Series connection is required when used with a low resistance of voltage at a high voltage.
(3) Cannot be used in AC circuits due to high internal resistance unlike aluminum electrolytic capacitors.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

1-4 Construction of DYNACAP

The series which consists of coin cells is similar to that of coin-type batteries as shown in Fig.2. DYNACAP contains a single cell or two to three cells stacked in series.

Since these series have a large electrode-to-electrode distance and a small electrode area exhibiting a large internal resistance, they are suitable for the memory backup application that involves microcurrent discharge.

The cylindrical cell construction as seen in the DZ and DZN series has the construction similar to that of aluminum electrolytic capacitors as shown in Fig.3.

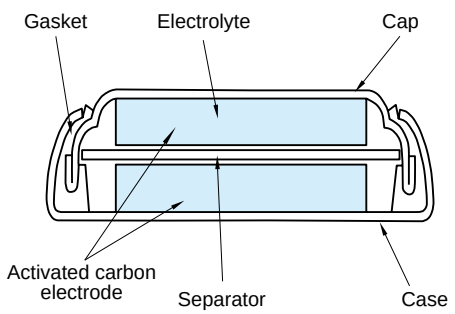

Fig.2 Example of Basic Construction of Coin Cell

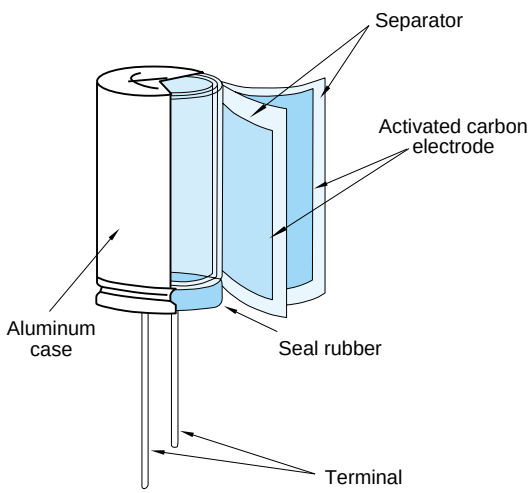

Fig.3 Example of Basic Construction of Cylindrical Cell

These series have a small electrode-to-electrode distance, allowing a large electrode area because of the winding structure. This decreases the internal resistance, which is primary suitable for applications requiring high-power such as motor drive and LED lighting that need high currents.

2 Description of Life Expectancy

Generally, the life of Electric Double Layer Capacitors is largely affected by the ambient temperature.
The expected life is approximated by the equation as shown below:

$$L = L_0 \times 2^{\left(\frac{T_0 - T}{10}\right)}$$

Where,

- L : Expected lifetime at temperature T
- L_0 : Lifetime at temperature T_0
- T : Expected working temperature
- T_0 : Upper category temperature

Note that the above equation does not cover charge and discharge. In the case of charge and discharge, heat generation occurs inside a capacitor; the temperature rise by this heat generation must also be considered.

The expected life time is a maximum as a guide in terms of deterioration of the sealant.
Coin cell type : about ten years
Cylindrical type : about fifteen years

3 Calculation Method of Discharge Time

3-1 Approximating the Discharge Time of Basic Constant Current Discharge

The discharge time at the constant current of a capacitor can be calculated by the following equation.

$$t = (C \times \Delta V)/I$$

Where,

- t : Discharge time (sec.)
- C : Capacitor capacitance (F)
- ΔV : Working voltage range (V)
- I : Discharge current (A)

As an example, we calculate the discharge time when a capacitor of the DB series 5.5V 1F is charged with 5V and discharged to 3V at a constant current of 1 mA. Since the working voltage range ΔV is 2V from 5 − 3V, t = (1F × 2V)/0.001A from the above equation, and the discharge time can be calculated as 2,000 seconds (about 33 minutes). Note that the actual discharge time may be different because this equation does not cover the effect of the self-discharge and the IR drop by internal resistance described below.

3-2 Effect of Self-discharge at Microcurrents

When backup is made by discharge with a micro-current below some μA especially for the memory backup application and the like, the discharge time must be determined while taking into account the self-discharge as shown in Fig.4.

The value closer to the actual discharge curve is obtained by adding the voltage drop through the self-discharge determined from the voltage retention characteristic test to the discharge curve given by calculation.

Note that the value of self-discharge varies by the charge time, charging current and an ambient temperature.

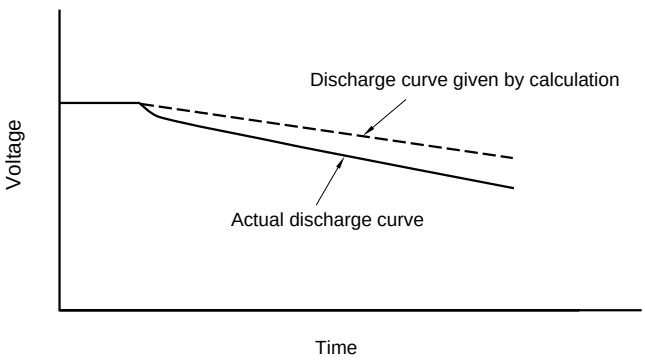

Fig.4 Example of Discharge Curve involving Self-Discharge

3-3 Effect of IR Drop at Large Currents

When a large Current discharge and a capacitor with a high internal resistance are used, the effect of IR drop by the product of the internal resistance and the current must be considered as shown in Fig.5.
Moreover, the maximum discharge current of the product (coin cell series) of a memory backup use recommends below 1 mA/F (at20 °C).

When a large current is required in a very short time, or a large instantaneous current flows at the start of discharge, the voltage drop indicated with ΔV1 counts. However, when the discharge continues as it is, the discharge curve indicates in a manner showing a slow diffusion and then keeps a constant straight line.

We also make calculation including ΔV2 of the intersection extending from the initial discharge and the discharge straight line section including the diffusion curve when indicating the DC internal resistance.

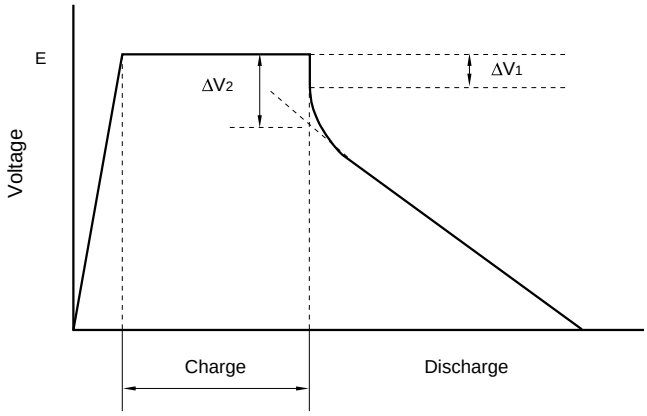

Fig.5 Example of Discharge Curve involving IR Drop

Due to IR drop, the shape of the discharge curve varies by the internal resistance and ambient temperature for each series.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

4 Series-parallel connection packaged products.

Electric Double Layer Capacitors have a low operating voltage per cell.
To deal with this, ELNA is ready to offer series packaging for high operating voltages to meet to various needs.

Please consult with us on optimization and design.

Packaged item

Example of packaged item

In case of a low voltage (up to about 24 V) for the DZ and DZN series with relatively low capacitance, we are preparing simple packaged products.
No full-scale voltage equalization circuit has been equipped yet, but comparatively low cost and flexible layout can be realized.

5 Moisture-proof provision

If a electric double layer capacitor is used in a heat-and-high-humidity environment, the characteristic will deteriorate.
Please consult when using in a heat and high humidlty environment.

6 Regarding Recovery Voltage

After charging and then discharging the electric double layer capacitor, and further causing short-circuit to the terminals and leave them alone, the voltage between the two terminals will rise again after some interval. This voltage is called recovery voltage.
This voltage may cause the bad influence to the low-voltage driven components (CPU, memory, etc.) or damage of the capacitor with soldering.
Discharging before use is safer. It is important especially when using it by series connection.
Moreover, it is possible making the terminals in short-circuit condition at the production stage. Please consult us for adequate procedures.

7 Applications

Features & Benefits of Electric Double Layer Capacitor

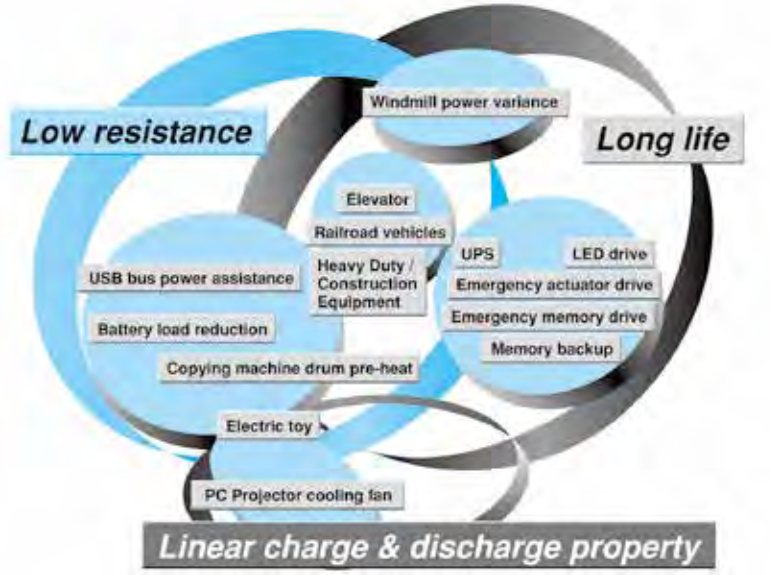

7 Electric Characteristics Data

7-1 Coin type for memory back-up

DYNACAP Series DXJ
5.5V 0.33F/DXJ-5R5H334U ϕ11.5×5L (mm)

DYNACAP Series DHL
5.5V 0.22F/DHL-5R5D224T ϕ13.5×9.5L (mm)

■ Endurance (85℃ 5.5V.DC)

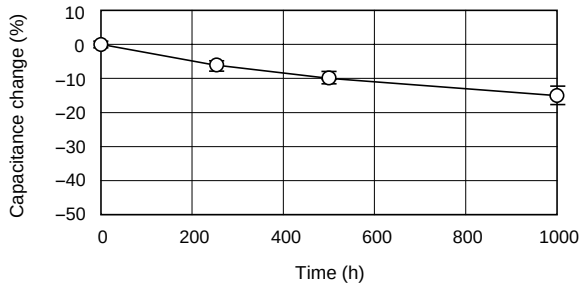

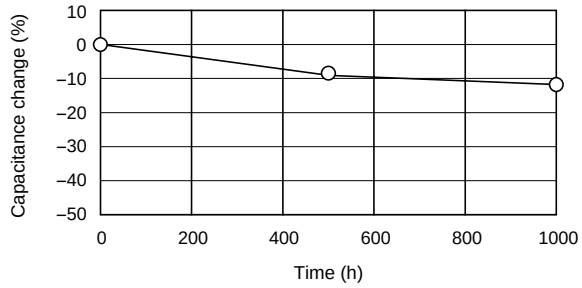

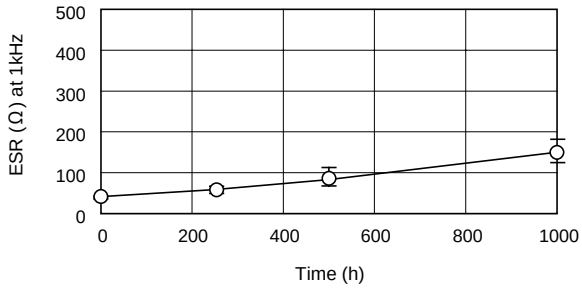

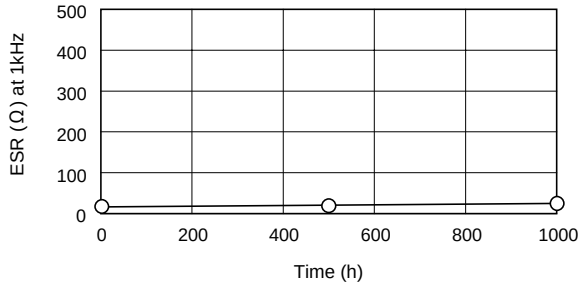

■ Discharge characteristics

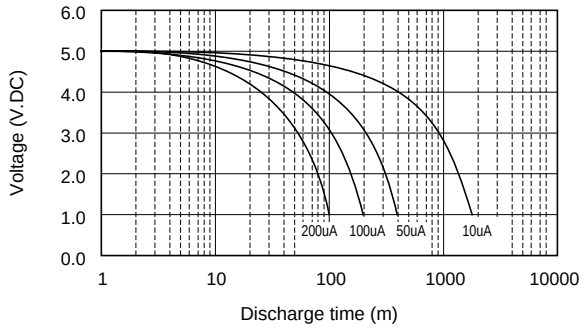

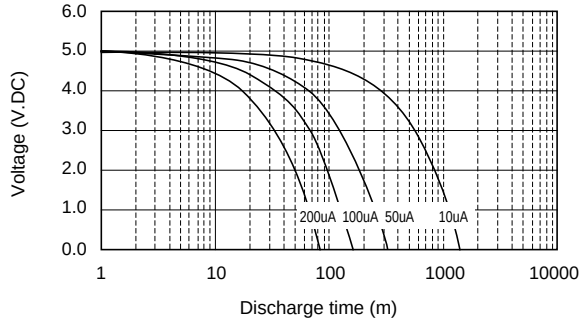

■ Characteristics at high and low temperature

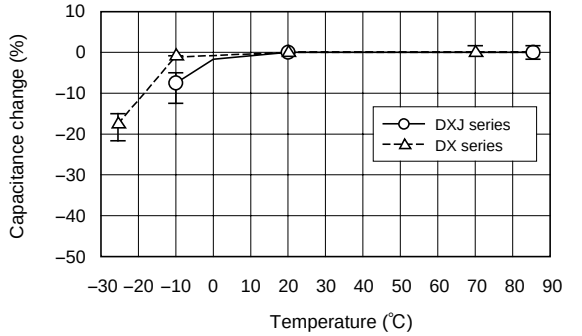

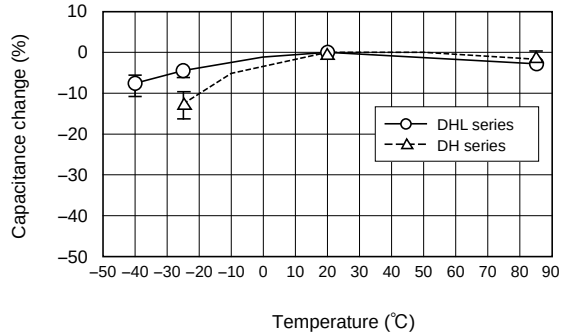

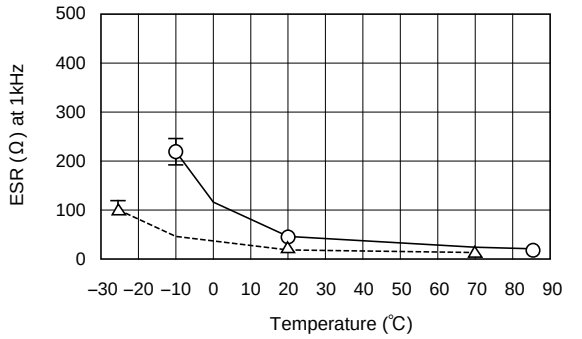

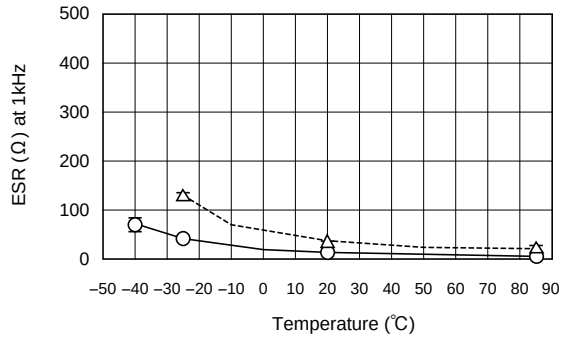

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

DYNACAP Series DSK
3.3V 0.22F/DSK-3R3H224T ϕ6.8×2.1L (mm)

■ Endurance (60℃ 3.3V.DC)

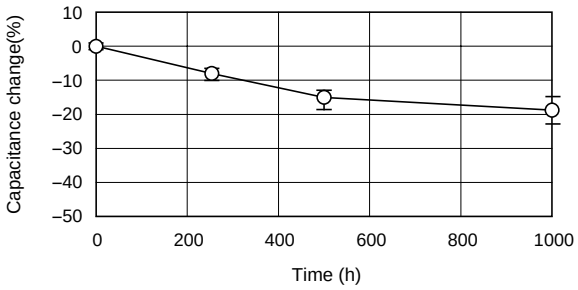

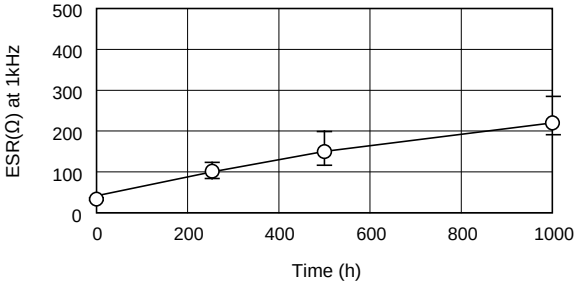

■ Discharge characteristics

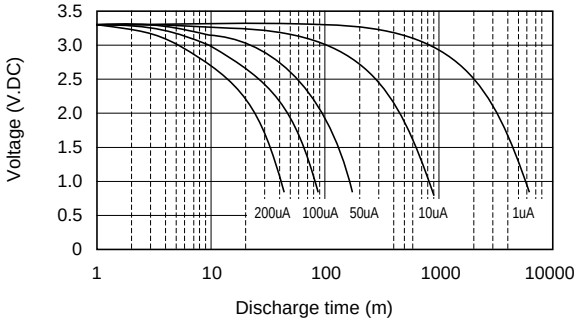

■ Characteristics at high and low temperature

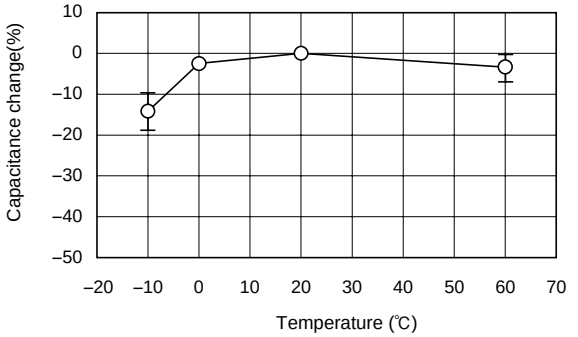

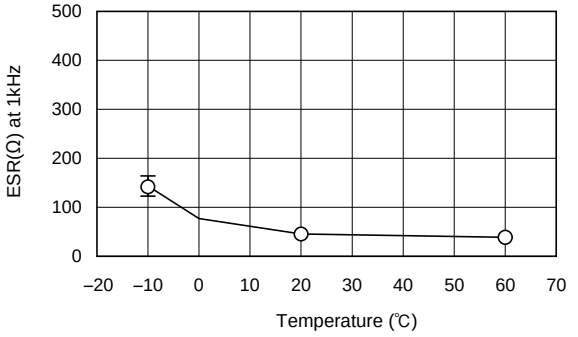

DYNACAP Series DVL
5.5V 0.22F/DVL-5R5D224T-R5 ϕ12.5X10.5L (mm)

■ Endurance (85℃ 5.5V.DC)

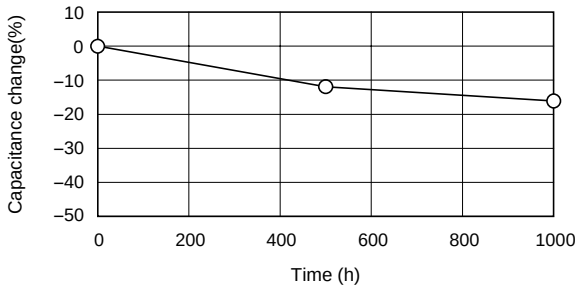

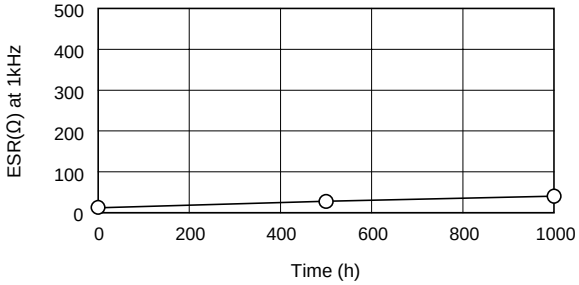

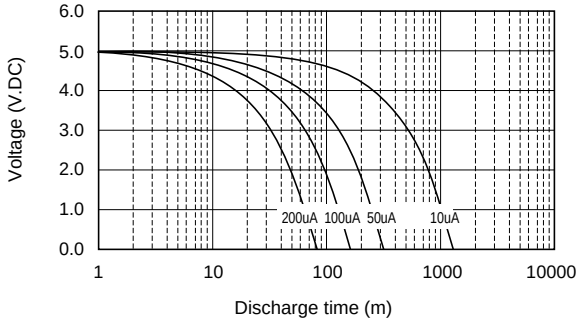

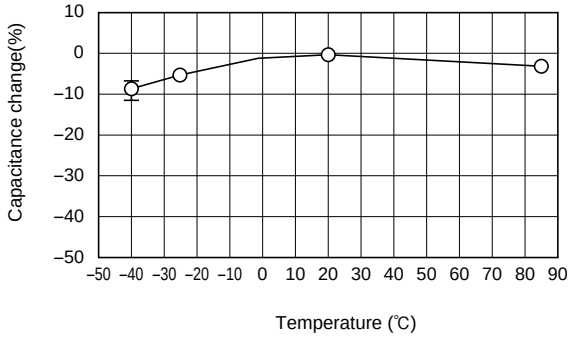

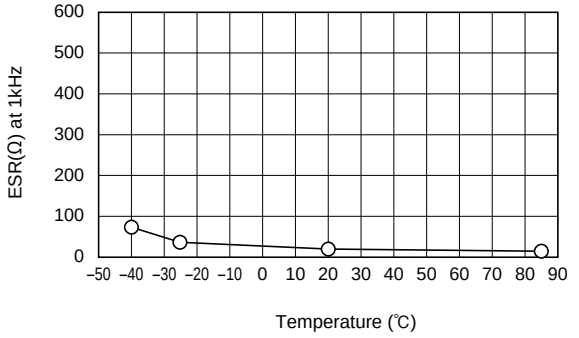

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

7-2 Cylindrical type for power

DYNACAP Series DZN
2.7V 2.7F/DZN-2R7D275G5ST ϕ8X20L (mm)

DYNACAP Series DU
2.7V 3.3F/DU-2R7D335G5T ϕ8X20L (mm)

■ Endurance (70℃ 2.7V.DC)

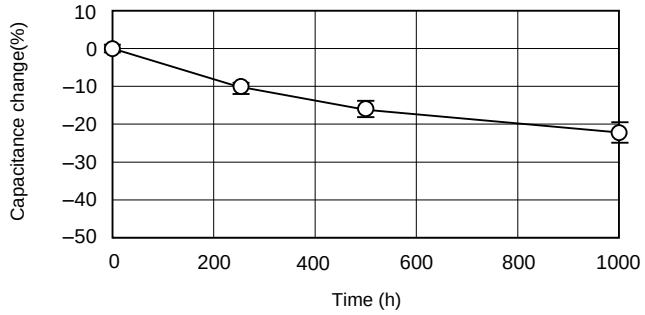

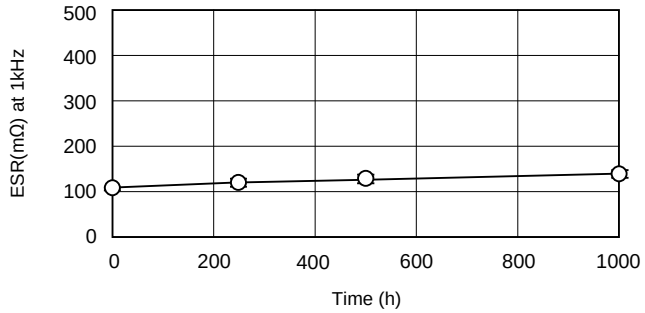

■ Endurance (65℃ 2.7V.DC)

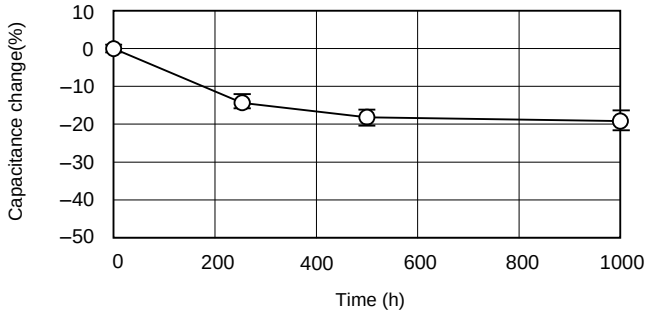

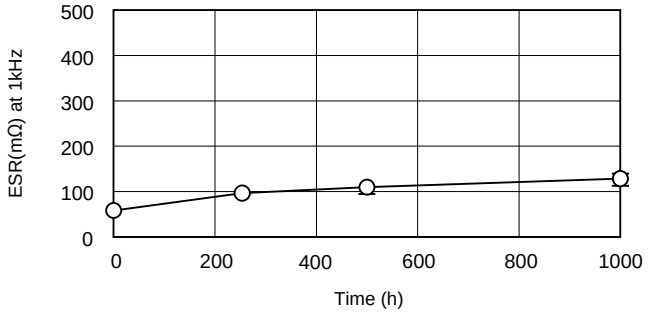

■ Discharge characteristics

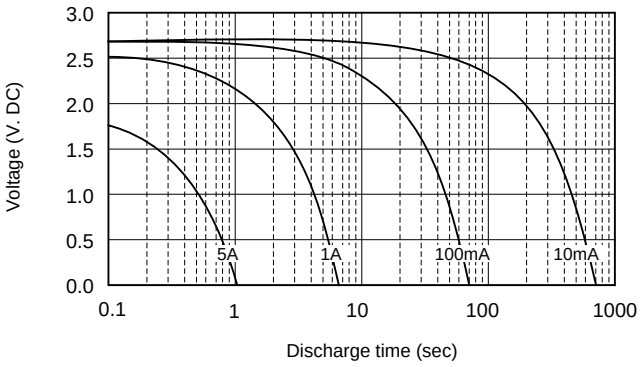

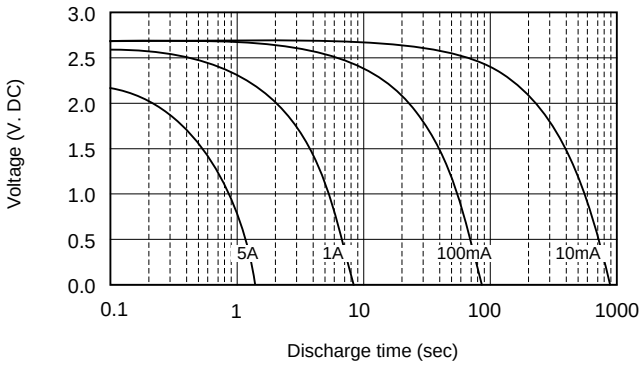

■ Characteristics at high and low temperature

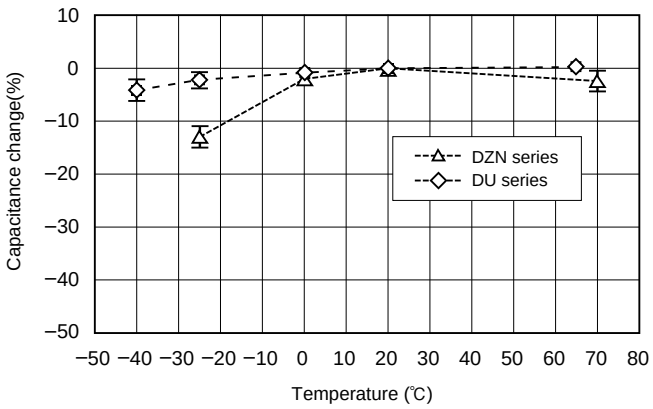

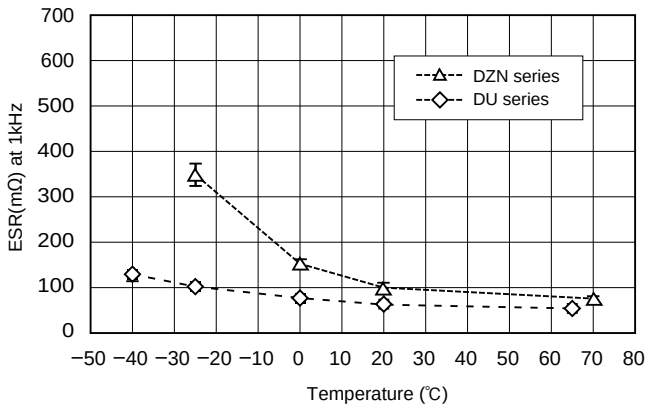

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

ELNA®

Plastic Film Capacitors

List of Contents

1. Product Symbol System for Plastic Film Capacitors ····· 274
2. Cautions for Plastic Film Capacitors ····· 275
3. Specifications for Plastic Film Capacitors by Series ····· 276
4. Technical Note for Plastic Film Capacitors ····· 284

3

CAT.No.2019/2020E

Product Symbol System for Plastic Film Capacitors

N Y D – □□□□ V □□□ □ □□□ 6 B B
① ② ③ ④ ⑤

N Y E – □□□□ V □□□ □ □□□ □ B
① ② ③ ④ ⑤ ⑥

N X * – □□□□ V □□□ □ □□□ □ B
① ② ③ ④ ⑤ ⑦

① Series code

Please refer to the page of each series.

② Rated voltage

Please refer to the page of each series.

③ Rated capacitance symbol

Example of series NYD, NYE

Capacitance (μF)	Capacitance symbol	Capacitance (μF)	Capacitance symbol
70	700	420	421
100	101	440	441
110	111	450	451
140	141	480	481
160	161	550	551
170	171	610	611
220	221	700	701
230	231	750	751
260	261	940	941
280	281	970	971
350	351	1100	112
400	401	1500	152

Example of series NXA, NXB

Capacitance (μF)	Capacitance symbol	Capacitance (μF)	Capacitance symbol
0.15	154	1.3	135
0.2	204	1.4	145
0.22	224	1.5	155
0.3	304	1.6	165
0.33	334	1.7	175
0.4	404	1.8	185
0.45	454	2	205
0.47	474	2.2	225
0.55	554	2.5	255
0.56	564	2.8	285
0.6	604	3	305
0.65	654	3.3	335
0.68	684	3.5	355
0.7	704	4	405
0.8	804	4.2	425
0.82	824	4.5	455
0.85	854	4.8	485
1	105	5	505
1.1	115	6	605
1.2	125	7	705

④ Capacitance tolerance symbol

Example

Contents	symbol
±5%	J
±10%	K
±20%	M

⑤ Casing symbol

Please refer to the page of each series.

⑥ Terminal code

Please refer to the page of each series.

⑦ Shape code

Please refer to the page of each series.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

■ Cautions for Using Film Capacitors

1 Operation voltage

The plastic film capacitor varies in the maximum applicable voltage depending on the applied voltage waveform, current waveform frequency, ambient temperature (capacitor surface temperature), capacitance value, etc.
Be sure to use capacitors within the specified values by checking the voltage waveform, current waveform, and frequency applied to them (In the application of high frequency, the permissible voltage varies with the type of the capacitor.
For detail see the specification).

2 Operating Current

The pulse (or AC) current flowing through the capacitor is expressed as: I=C x dV/dt

Due to the fact that dissipation factor of the capacitor will generate the internal heat under the application of high frequency or high pulse current, temperature rise in it will occur and may cause deterioration of with standing voltage, even lead to break down (smoking or firing).
Therefore, the safety use of capacitor must be within the rated voltage(or category voltage)and the permissible current. The rated current must be considered by dividing into pulse current (peak current) and continuous current (rms current) depending on the break down mode, and when using, should make sure the both currents are within the permissible values.

3 Calculation of rms in various waveforms

In each waveform, calculate the rms value in the following formula.

type	1	2	3	4
waveform				
(rms)	$E/\sqrt{2}$	$E/\sqrt{2}$	$E\sqrt{t/(2T)}$	$E/\sqrt{3}$

type	5	6	7	8
waveform				
(rms)	$E\sqrt{t/(3T)}$	E	$E/\sqrt{t/T}$	$\sqrt{\frac{1}{2T(I1^2+I2^2+I3^2+I4^2)}}$

4 Charging and discharging

Because the charging and discharging current of capacitor is obtained by the product of voltage rise rate (dV/dt) and capacitance, low voltage charging and discharging may also cause deterioration of capacitor such as shorting and open due to sudden charging and discharging current.
When charging and discharging, pass though a resistance of 20Ω/V to 1000Ω/V or more to limit current.
When connecting multiple film capacitors in parallel in withstand voltage test or life test, connect a resistance of 20Ω/V to 1000Ω/V or more in series to each capacitor. (For detail see the specification)
In additional, capacitors must be discharged with resistor before handling.
Because the capacitor hasn't discharge resistor inside, so there is residual but maybe deathful electric energy contained.

5 Buzzing noise

Any buzzing noise produced by capacitor is caused by the vibration of the film due to the coulomb force that is generated between the electrodes with opposite poles.
If the wave-form with a high distortion rate or frequency is applied across the capacitor, the buzzing noise will become louder.
But the buzzing noise is of no damage to capacitor.

6 Surface over temperature △θcase

When continuing current flows through the capacitor, the temperature inside the capacitor will rise, induced by accumulated heat.
If the temperature exceeds allowed hot-spot temperature, it might cause a short circuit or fire.
The limits described in the catalogue are not exceeded and it's necessary to check the temperature on the capacitor surface when it works.

7 Flame retardation

Although flame retardation epoxy resin or plastic case is used in the coating or encapsulating of plastic film capacitor, continuous outer high temperature or firing will break the coating layer or plastic case of the capacitor, and may lead to melting and firing of the capacitor element.

flame time (s)

Class \ volume (mm^3)	≦250	250<, ≦500	500<, ≦1750	1750<	Max. flame time (s)
A	15	30	60	120	3
B	10	20	30	60	10
C	5	10	20	30	30

8 Humid ambient

If used for a long time in a humid ambient, the capacitor might absorb humidity and oxidize the electrodes causing breakage of the capacitor.
If case of AC application, high humidity would increase the corona effect. This phenomenon causes a drop of capacitance and a increase of capacitor losses.

9 Storage conditions

1) Capacitors may not be stored in corrosive atmospheres, particularly not when chlorides, sulfides, acids, lye, salts, organic solvents or similar substances are present.
2) It shouldn't be located in particularly high temperature and high humidity, it must submit to the following conditions(unchanging primal package):
Temperature : ≦35°C
Humidity : ≦80% RH, no dew allowed on the capacitor.
Storage time: ≦24 months (from the dale marked on the capacitor's body or the label glued to the package)

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

ELNA®

For DC-Link Circuits Capacitors

85°C DC-LINK

- Used in DC-Link circuits, can replace electrolytic capacitor.
- PP film design, good temperature characteristics, stable capacity, low ESR, high ripple current handing capabilities, low Ls, long life.
- Aluminum case, filled with fire-retardant resin.
- Self-healing property.
- Used in Inverters of wind power and solar power, HEV or EV, welders, elevators, Motor Driver systems.

Specifications

Item	Performance	
Category temperature range (℃)	−55 to +85	(at Hotspot in capacitor)
Tolerance at rated capacitance (%)	±5, ±10	(20℃, 50 to 120Hz)
Over Voltage	Rated voltage × 1.1	30% of on-load-duration
	Rated voltage × 1.15	30 min/day
	Rated voltage × 1.2	5 min/day
	Rated voltage × 1.3	1 min/day
	Rated voltage × 1.5	30 ms every time, 100ms/day
Dielectric Dissipation Factor	2×10^{-4} or less	
Life Expectancy	100000 hours	(at Hotspot in capacitor = 70℃)
Failure Rate	50Fit	
Withstanding DC Voltage	Between Terminals	Rated voltage × 1.5 10s
	Between Terminals and Case	(2x(Ratef voltage)/$\sqrt{2}$)+1000 or 3000 VAC whichever is lager 10 s (20℃, 50Hz)
Insulation Resistance	5000MΩ・μF or more	(20℃, 100V DC, 1min)
Reference Standard	IEC 61071	

Outline Drawing

Unit : mm

Shape 1

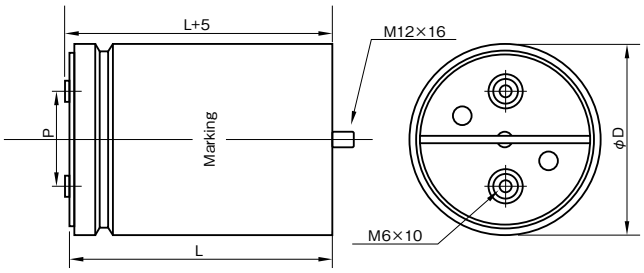

φD	85	116
P	32	50

Shape 2

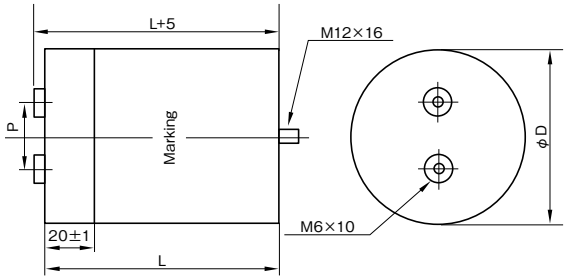

φD	76	86
P	32	32

Part numbering system (example : 1100V420μF)

NYD	—	1100	V	421	K	F(S)D6	6BB
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol	Optional symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage U_R (V)	Rated capacitance C_R (μF)	Case (mm) φD	Case (mm) L	Casing symbol	Maximum current Imax (Arms)	Thermal resistance R_{th} (K/W)	Maximum peak current Î (A)	Series resistance R_S (mΩ)	Self-inductance L_S (nH)	ELNA Parts No.
800	350	76	120	EC0	60	4.7	3500	2.4	60	NYD-800V351∗EC06BB
	400	76	136	ED6	56	4.6	3600	2.8	60	NYD-800V401∗ED66BB
	480	85	120	FC0	61	4.7	3840	2.3	60	NYD-800V481∗FC06BB
		86	120	FSC0	61	4.7	3840	2.3	60	NYD-800V481∗FSC06BB
	550	85	136	FD6	58	4.6	3850	2.6	60	NYD-800V551∗FD66BB
		86	136	FSD6	58	4.6	3850	2.6	60	NYD-800V551∗FSD66BB
	970	116	120	HC0	69	5	5820	1.7	60	NYD-800V971∗HC06BB
	1000	85	225	FM5	79	4	6000	1.6	80	NYD-800V102∗FM56BB
		86	225	FSM5	79	4	6000	1.6	80	NYD-800V102∗FSM56BB
	1100	116	136	HD6	67	4.9	6600	1.8	60	NYD-800V112∗HD66BB
	1900	116	230	HN0	100	2.7	11400	1.4	80	NYD-800V192∗HN06BB
900	350	76	120	EC0	54	4.7	3500	2.9	60	NYD-900V351∗EC06BB
	400	76	136	ED6	51	4.6	3600	3.3	60	NYD-900V401∗ED66BB
	480	85	120	FC0	55	4.7	3840	2.8	60	NYD-900V481∗FC06BB
		86	120	FSC0	55	4.7	3840	2.8	60	NYD-900V481∗FSC06BB
	550	85	136	FD6	53	4.6	3850	3.1	60	NYD-900V551∗FD66BB
		86	136	FSD6	53	4.6	3850	3.1	60	NYD-900V551∗FSD66BB
	970	116	120	HC0	60	5	5820	2.2	60	NYD-900V971∗HC06BB
	1000	85	225	FM5	69	4	6000	2.1	80	NYD-900V102∗FM56BB
		86	225	FSM5	69	4	6000	2.1	80	NYD-900V102∗FSM56BB
	1100	116	136	HD6	60	4.9	6600	2.3	60	NYD-900V112∗HD66BB
	1900	116	230	HN0	88	2.7	11400	1.9	80	NYD-900V192∗HN06BB
1100	170	76	95	E95	50	5.6	1700	3	60	NYD-1100V171∗E956BB
	230	76	120	EC0	50	4.7	1840	3.4	60	NYD-1100V231∗EC06BB
	240	85	95	F95	56	5.1	1920	2.5	60	NYD-1100V241∗F956BB
		86	95	FS95	56	5.1	1920	2.5	60	NYD-1100V241∗FS956BB
	260	76	136	ED6	50	4.6	2080	3.6	60	NYD-1100V261∗ED66BB
	310	85	120	FC0	57	4.7	2480	2.6	60	NYD-1100V311∗FC06BB
		86	120	FSC0	57	4.7	2480	2.6	60	NYD-1100V311∗FSC06BB
	350	76	175	EH5	68	4.3	2800	2	80	NYD-1100V351∗EH56BB
	420	85	136	FD6	56	4.6	3360	2.8	60	NYD-1100V421∗FD66BB
		86	136	FSD6	56	4.6	3360	2.8	60	NYD-1100V421∗FSD66BB
	420	85	155	FF5	75	4.5	4200	1.6	60	NYD-1100V421∗FF56BB
		86	155	FSF5	75	4.5	4200	1.6	60	NYD-1100V421∗FSF56BB
	450	116	95	H95	61	5.4	4500	2	60	NYD-1100V451∗H956BB
	480	85	175	FH5	72	4.3	4800	1.8	80	NYD-1100V481∗FH56BB
		86	175	FSH5	72	4.3	4800	1.8	80	NYD-1100V481∗FSH56BB
	600	85	225	FM5	71	4	6000	2	80	NYD-1100V601∗FM56BB
		86	225	FSM5	71	4	6000	2	80	NYD-1100V601∗FSM56BB
	610	116	120	HC0	60	5	4880	2.2	60	NYD-1100V611∗HC06BB
	680	116	136	HD6	58	4.9	5440	2.4	60	NYD-1100V681∗HD66BB
	940	116	175	HH5	99	3.4	8460	1.2	80	NYD-1100V941∗HH56BB
	1100	116	230	HN0	100	2.7	9900	1.3	80	NYD-1100V112∗HN06BB
	1200	116	230	HN0	100	2.7	10800	1.3	80	NYD-1100V122∗HN06BB
1200	220	76	136	ED6	46	4.6	2200	4.2	60	NYD-1200V221∗ED66BB
	300	85	136	FD6	50	4.6	3000	3.5	60	NYD-1200V301∗FD66BB
		86	136	FSD6	50	4.6	3000	3.5	60	NYD-1200V301∗FSD66BB
	450	116	136	HD6	54	4.9	4050	2.8	60	NYD-1200V451∗HD66BB
	470	86	225	HM5	67	4	4230	2.2	80	NYD-1200V471∗FSM56BB
1300	100	76	95	E95	46	5.6	1400	3.4	60	NYD-1300V101∗E956BB
	160	76	120	EC0	50	4.7	1920	3.6	60	NYD-1300V161∗EC06BB
	160	85	95	F95	53	5.1	2240	2.8	60	NYD-1300V161∗F956BB
		86	95	FS95	53	5.1	2240	2.8	60	NYD-1300V161∗FS956BB
	220	85	120	FC0	53	4.7	2640	3	60	NYD-1300V221∗FC06BB
		86	120	FSC0	53	4.7	2640	3	60	NYD-1300V221∗FSC06BB
	310	116	95	H95	58	5.4	3720	2.2	60	NYD-1300V311∗H956BB
	310	85	175	FH5	45	4.3	3720	4.9	60	NYD-1300V311∗FH56BB
		86	175	FSH5	45	4.3	3720	4.9	60	NYD-1300V311∗FSH56BB
	420	116	120	HC0	57	5	4200	2.5	60	NYD-1300V421∗HC06BB
	470	85	225	FM5	65	4	4700	2.4	80	NYD-1300V471∗FM56BB
		86	225	FSM5	65	4	4700	2.4	80	NYD-1300V471∗FSM56BB
	620	116	175	HH5	92	3.4	5580	1.4	80	NYD-1300V621∗HH56BB
	800	116	230	HN0	95	2.7	6400	1.5	80	NYD-1300V801∗HN06BB
1500	400	116	155	HF5	85	4.3	4000	1.3	60	NYD-1500V401∗HF56BB

(Note) ∗ : If tolerance at rated capacitance is 5% = J, 10% = K

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications
from ELNA to ensure that the component is suitable for your use.

NYE PLASTIC FILM CAPACITORS

ELNA®

For DC-Link Circuits Capacitors

85°C DC-LINK

- Used in DC-Link circuits, can replace electrolytic capacitor.
- PP film design, good temperature characteristics, stable capacity, low ESR, high ripple current handing capabilities, low Ls, long life.
- Plastic case , filled with fire-retardant resin.
- Self-healing property.
- Used in Inverters of wind power and solar power, welders, elevators, Motor Driver systems.

Specifications

Item	Performance		
Category temperature range (℃)	−40 to +85		(at Hotspot in capacitor)
Tolerance at rated capacitance (%)	±5, ±10		(20℃, 50 to 120Hz)
Over Voltage	Rated voltage × 1.1	30% of on-load-duration	
	Rated voltage × 1.15	30 min/day	
	Rated voltage × 1.2	5 min/day	
	Rated voltage × 1.3	1 min/day	
	Rated voltage × 1.5	30 ms every time, 100ms/day	
Dielectric Dissipation Factor	2×10^{-4} or less		
Life Expectancy	100000 hours		(at Hotspot in capacitor = 70℃)
Failure Rate	50Fit		
Withstanding DC Voltage	Between Terminals	Rated voltage × 1.5 VDC 10 s	
	Between Terminals and Case	(2x(Ratef voltage)/$\sqrt{2}$)+1000 or 3000 VAC whichever is lager 10 s	(20℃, 50Hz)
Insulation Resistance	5000MΩ・μF or more		(20℃, 100V DC, 1min)
Reference Standard	IEC 61071		

Outline Drawing

Unit : mm

Shape 1 (Terminal code Y)

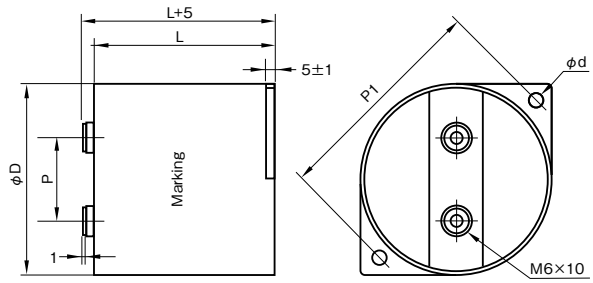

Shape 2 (Terminal code N)

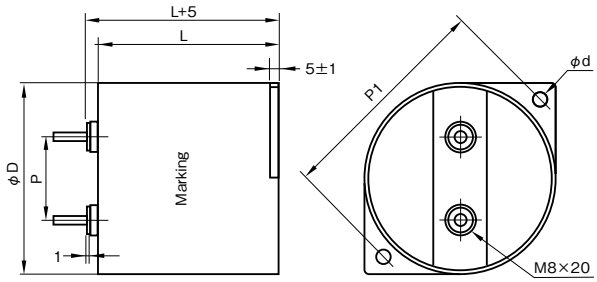

φD	85	85
L	65	51
P	45	45
P1	101	101
φd	5.5	5.5

Part numbering system (example : 1000V110μF)

NYE	—	1000	V	111	K	F65	Y	B
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol	Terminal code	Optional symbol

PLASTIC FILM

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage U_R (V)	Rated capacitance C_R (μF)	Case (mm) φD	Case (mm) L	Casing symbol	Maximum current I_{max} (Arms)	Thermal resistance R_{th} (K/W)	Maximum peak current $\hat{I}$ (A)	Series resistance R_S (mΩ)	Self-inductance L_S (nH)	ELNA Parts No.
600	200	85	51	F51	55	4.2	4000	1.2	20	NYE-600V201∗F51□B
	280	85	65	F65	65	5.5	3700	1.4	30	NYE-600V281∗F65□B
800	120	85	51	F51	55	4.2	3000	1.2	20	NYE-800V121∗F51□B
	220	85	65	F65	65	5.5	3000	1.4	30	NYE-800V221∗F65□B
1000	75	85	51	F51	50	4.2	2400	1.4	20	NYE-1000V750∗F51□B
	110	85	65	F65	60	5.5	2300	1.7	30	NYE-1000V111∗F65□B
1200	50	85	51	F51	50	4.2	2000	1.6	20	NYE-1200V500∗F51□B
	80	85	65	F65	60	5.5	2000	2.0	30	NYE-1200V800∗F65□B

(Note) ∗ : If tolerance at rated capacitance is 5% = J, 10% = K
□ : Terminal code

ELNA®

For High-frequency Circuits Capacitors

85°C | High frequency

- Widely used in high voltage, high frequency circuit.
- Low loss and small inherent temperature rise.
- Excellent active and passive flame resistant circuit.
- Especially designed as snubber capacitor for IGBT.

Specifications

Item	Performance	
Category temperature range (℃)	− 40 to +85	(at Hotspot in capacitor)
Tolerance at rated capacitance (%)	±5, ±10	(20℃, 50 to 120Hz)
Dielectric Dissipation Factor	2×10^{-4} or less	
Life Expectancy	100000 hours	(at Hotspot in capacitor = 70°C)
Failure Rate	100Fit	
Withstanding DC Voltage	Between Terminals: Rated voltage ×1.5 VDC 10 s	
	Between Terminals and Case: 3000 VAC 10 s	(20℃, 50Hz)
Insulation Resistance	3000MΩ・μF or more	(20℃, 100V DC, 1min)
Reference Standard	IEC 61071	

Outline Drawing

Unit : mm

Shape A

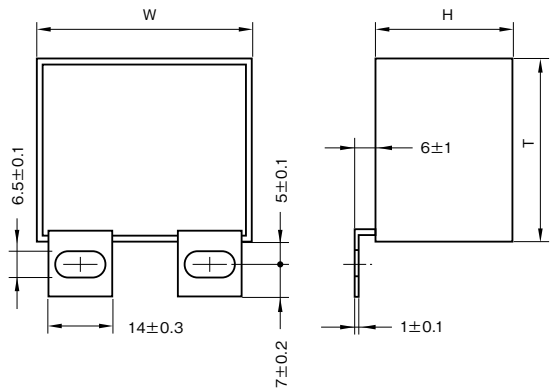

Shape B

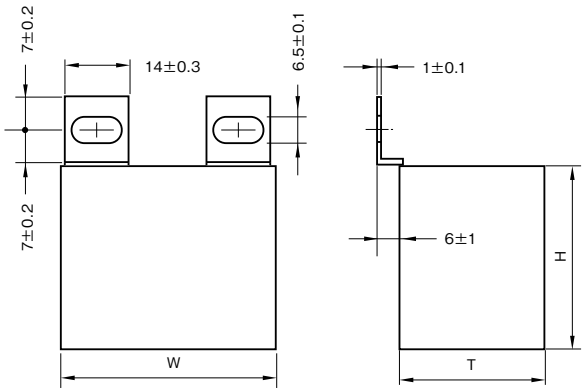

Shape C

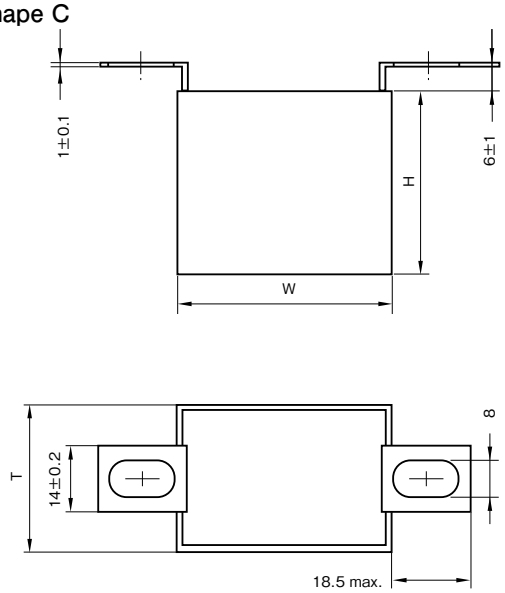

W		H		T	
Size	Code	Size	Code	Size	Code
42.5	A	25.5	A	14	A
43	B	28	B	24	B
57.5	C	32	C	25.5	C
		33	D	29.5	D
		35.5	E	30	E
		36	F	33	F
		43	G	33.5	G
		43.5	H	35	H
		45	J	40	J
		50	K	42	K
		55	L	45	L

(Note) Tolerance at size : ±1.0

Part numbering system (example : 1200V2.2μF)

NXA	—	1200	V	225	K	CHD	A	B
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol	Shape code	Optional symbol

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage U_R (V)	Rated capacitance C_R (μF)	Case (mm) W	H	T	Casing symbol	Maximum rate of voltage rise dV/dt (V/μS)	Maximum Peak current $\hat{I}$ (A)	ESR (mΩ/100kHz Max.)	Maximum current Imax (A)	Self-inductance Ls (nH)	ELNA Parts No.
630VDC (330VAC)	1	42.5	28	14	ABA	100	100	12	7.5	20	NXA-630V105∗ABA□B
	1.2	42.5	32	14	ACA	100	120	11	9.4	20	NXA-630V125∗ACA□B
	1.5	42.5	25.5	25.5	AAC	100	150	10	11	20	NXA-630V155∗AAC□B
	2	42.5	28	24	ABB	100	200	8	12.6	20	NXA-630V205∗ABB□B
	3	42.5	36	24	AFB	100	300	7	17.2	20	NXA-630V305∗AFB□B
	3.5	42.5	33	33	ADF	100	350	6	19.2	20	NXA-630V355∗ADF□B
	4	42.5	35.5	33.5	AEG	100	400	5	20.5	20	NXA-630V405∗AEG□B
	4.5	42.5	45	30	AJE	100	450	4	23	20	NXA-630V455∗AJE□B
	7	42.5	43	42	AGK	100	700	3	28	20	NXA-630V705∗AGK□B
700VDC (380VAC)	0.8	42.5	28	14	ABA	132	105.6	12	7.2	20	NXA-700V804∗ABA□B
	1	42.5	32	14	ACA	132	132	12	9.2	20	NXA-700V105∗ACA□B
	1.2	42.5	25.5	25.5	AAC	132	158.4	10	10.8	20	NXA-700V125∗AAC□B
	1.6	42.5	28	24	ABB	132	211.2	10	12.4	20	NXA-700V165∗ABB□B
	2.5	42.5	36	24	AFB	132	330	8	16.8	20	NXA-700V255∗AFB□B
	3	42.5	33	33	ADF	132	396	7	18.8	20	NXA-700V305∗ADF□B
	3.5	42.5	35.5	33.5	AEG	132	462	6	20.3	20	NXA-700V355∗AEG□B
	4	42.5	45	30	AJE	132	528	5	22.4	20	NXA-700V405∗AJE□B
	6	42.5	43	42	AGK	132	792	4	25	20	NXA-700V605∗AGK□B
850VDC (450VAC)	0.7	42.5	28	14	ABA	200	140	12	6.4	20	NXA-850V704∗ABA□B
	0.8	42.5	32	14	ACA	200	160	12	8.8	20	NXA-850V804∗ACA□B
	1	42.5	25.5	25.5	AAC	200	200	10	10.4	20	NXA-850V105∗AAC□B
	1.2	42.5	28	24	ABB	200	240	10	11.8	20	NXA-850V125∗ABB□B
	2	42.5	36	24	AFB	200	400	9	15.8	20	NXA-850V205∗AFB□B
	2.5	42.5	33	33	ADF	200	500	8	17.6	20	NXA-850V255∗ADF□B
	2.8	42.5	35.5	33.5	AEG	200	560	7	19.8	20	NXA-850V285∗AEG□B
	3.3	42.5	45	30	AJE	200	660	6	21.5	20	NXA-850V335∗AJE□B
	4	42.5	43	42	AGK	200	800	5	24	20	NXA-850V405∗AGK□B
1000VDC (480VAC)	0.47	42.5	28	14	ABA	225	105.75	12	6.2	20	NXA-1000V474∗ABA□B
	0.56	42.5	32	14	ACA	225	126	12	8.6	20	NXA-1000V564∗ACA□B
	0.82	42.5	25.5	25.5	AAC	225	184.5	10	9.8	20	NXA-1000V824∗AAC□B
	1	42.5	28	24	ABB	225	225	10	11.6	20	NXA-1000V105∗ABB□B
	1.5	42.5	36	24	AFB	225	337.5	9	15.5	20	NXA-1000V155∗AFB□B
	1.8	42.5	33	33	ADF	225	405	8	17.5	20	NXA-1000V185∗ADF□B
	2	42.5	35.5	33.5	AEG	225	450	7	18.8	20	NXA-1000V205∗AEG□B
	2.5	42.5	45	30	AJE	225	562.5	6	21	20	NXA-1000V255∗AJE□B
	3	42.5	43	42	AGK	225	675	5	23	20	NXA-1000V305∗AGK□B
	3.3	57.5	43.5	29.5	CHD	130	429	6	23	20	NXA-1000V335∗CHD□B
	3.5	57.5	45	30	CJE	130	455	5	24	20	NXA-1000V355∗CJE□B
	4.2	57.5	45	35	CJH	130	546	5	24	20	NXA-1000V425∗CJH□B
	4.8	57.5	50	35	CKH	130	624	4	25	20	NXA-1000V485∗CKH□B
	5	57.5	45	45	CJL	130	650	4	25	20	NXA-1000V505∗CJL□B
	6	57.5	55	40	CLJ	130	780	4	28	20	NXA-1000V605∗CLJ□B
1200VDC (500VAC)	0.33	42.5	28	14	ABA	225	74.25	12	6	20	NXA-1200V334∗ABA□B
	0.4	42.5	32	14	ACA	225	90	12	8.5	20	NXA-1200V404∗ACA□B
	0.56	42.5	25.5	25.5	AAC	225	126	11	9.6	20	NXA-1200V564∗AAC□B
	0.68	42.5	28	24	ABB	225	153	10	11.5	20	NXA-1200V684∗ABB□B
	1	42.5	36	24	AFB	225	225	10	15.4	20	NXA-1200V105∗AFB□B
	1.1	42.5	33	33	ADF	225	247.5	9	17.2	20	NXA-1200V115∗ADF□B
	1.3	42.5	35.5	33.5	AEG	225	292.5	8	18.6	20	NXA-1200V135∗AEG□B
	1.6	42.5	45	30	AJE	225	360	7	20.6	20	NXA-1200V165∗AJE□B
	2	42.5	43	42	AGK	225	450	6	22	20	NXA-1200V205∗AGK□B
	2.2	57.5	43.5	29.5	CHD	150	330	6	22	20	NXA-1200V225∗CHD□B
	2.5	57.5	45	30	CJE	150	375	6	23	20	NXA-1200V255∗CJE□B
	2.8	57.5	45	35	CJH	150	420	5	24	20	NXA-1200V285∗CJH□B
	3.3	57.5	50	35	CKH	150	495	5	24	20	NXA-1200V335∗CKH□B
	3.5	57.5	45	45	CJL	150	525	4	25	20	NXA-1200V355∗CJL□B
	4	57.5	55	40	CLJ	150	600	4	26	20	NXA-1200V405∗CLJ□B
1600VDC (550VAC)	0.2	42.5	28	14	ABA	225	45	12	6	20	NXA-1600V204∗ABA□B
	0.22	42.5	32	14	ACA	225	49.5	12	8.4	20	NXA-1600V224∗ACA□B
	0.33	42.5	25.5	25.5	AAC	225	74.25	11	9.5	20	NXA-1600V334∗AAC□B
	0.45	42.5	28	24	ABB	225	101.25	11	11.4	20	NXA-1600V454∗ABB□B
	0.6	42.5	36	24	AFB	225	135	10	15.2	20	NXA-1600V604∗AFB□B
	0.7	43	33	33	BDF	225	157.5	10	17	20	NXA-1600V704∗BDF□B
	0.85	43	35.5	33.5	BEG	225	191.25	9	18.4	20	NXA-1600V854∗BEG□B
	1	42.5	45	30	AJE	225	225	8	20.5	20	NXA-1600V105∗AJE□B
	1.3	42.5	43	42	AGK	225	292.5	7	21	20	NXA-1600V135∗AGK□B
	1.5	57.5	43.5	29.5	CHD	150	225	6	22	20	NXA-1600V155∗CHD□B
	1.6	57.5	45	30	CJE	150	240	6	22	20	NXA-1600V165∗CJE□B
	1.8	57.5	45	35	CJH	150	270	5	23	20	NXA-1600V185∗CJH□B
	2	57.5	50	35	CKH	150	300	5	24	20	NXA-1600V205∗CKH□B
	2.2	57.5	45	45	CJL	150	330	4	24	20	NXA-1600V225∗CJL□B
	2.5	57.5	55	40	CLJ	150	375	4	25	20	NXA-1600V255∗CLJ□B

(Note) ∗ : If tolerance at rated capacitance is 5% = J, 10% = K
□ : Shape code

ELNA®

For High-frequency Circuits Capacitors

85°C | High frequency

- Widely used in high voltage, high frequency circuit.
- Low loss and small inherent temperature rise.
- Excellent active and passive flame resistant circuit.
- Double side metallized.
- Especially designed as snubber capacitor for I GBT.

Specifications

Item	Performance	
Category temperature range (℃)	− 40 to +85	(at Hotspot in capacitor)
Tolerance at rated capacitance (%)	±5, ±10	(20℃, 50 to 120Hz)
Dielectric Dissipation Factor	2×10^{-4} or less	
Life Expectancy	100000 hours	(at Hotspot in capacitor = 70°C)
Failure Rate	100Fit	
Withstanding DC Voltage	Between Terminals: Rated voltage ×1.5 VDC 10 s	
	Between Terminals and Case: 3000 VAC 10 s	(20℃, 50Hz)
Insulation Resistance	3000MΩ・μF or more	(20℃, 100V DC, 1min)
Reference Standard	IEC 61071	

Outline Drawing

Unit : mm

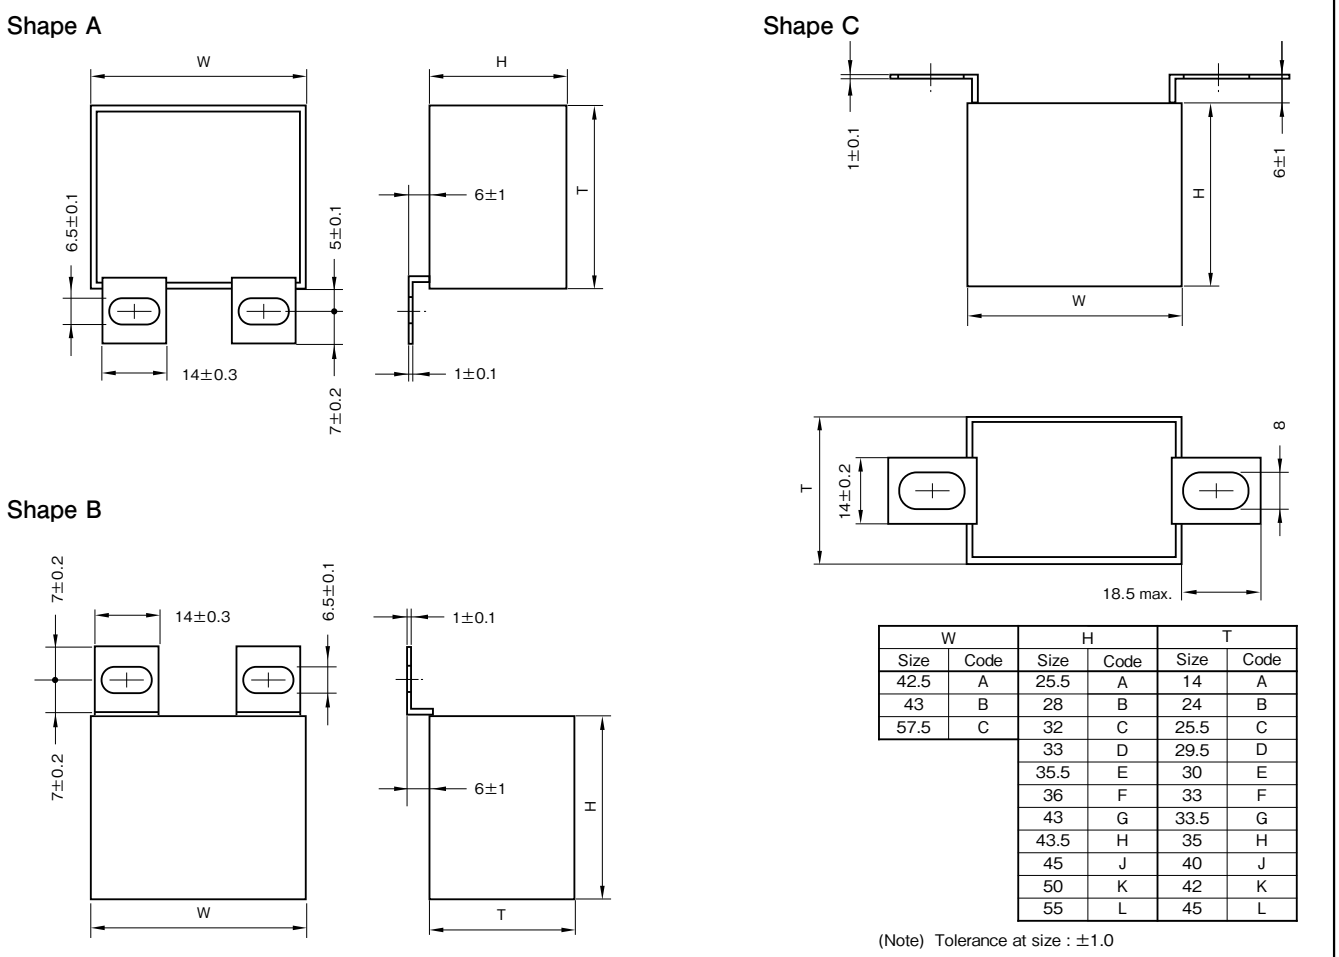

W		H		T	
Size	Code	Size	Code	Size	Code
42.5	A	25.5	A	14	A
43	B	28	B	24	B
57.5	C	32	C	25.5	C
		33	D	29.5	D
		35.5	E	30	E
		36	F	33	F
		43	G	33.5	G
		43.5	H	35	H
		45	J	40	J
		50	K	42	K
		55	L	45	L

(Note) Tolerance at size : ±1.0

Part numbering system (example : 850V2.2μF)

NXB	—	850	V	225	K	AJE	C	B
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol	Shape code	Optional symbol

PLASTIC FILM

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

Standard Ratings

Rated voltage U_R (V)	Rated capacitance C_R (μF)	Case (mm) W	H	T	Casing symbol	Maximum rate of voltage rise dV/dt (V/μS)	Maximum Peak current $\hat{I}$ (A)	ESR (mΩ/100kHz Max.)	Maximum current Imax (A)	Self-inductance L_S (nH)	ELNA Parts No.
700VDC (380VAC)	0.6	42.5	28	14	ABA	325	195	12	7.2	20	NXB-700V604∗ABA□B
	0.8	42.5	32	14	ACA	325	260	12	9.2	20	NXB-700V804∗ACA□B
	1	42.5	25.5	25.5	AAC	325	325	10	10.8	20	NXB-700V105∗AAC□B
	1.2	42.5	28	24	ABB	325	390	10	12.4	20	NXB-700V125∗ABB□B
	1.8	42.5	36	24	AFB	325	585	8	16.8	20	NXB-700V185∗AFB□B
	2.2	42.5	33	33	ADF	325	715	7	18.8	20	NXB-700V225∗ADF□B
	2.5	42.5	35.5	33.5	AEG	325	813	6	20.3	20	NXB-700V255∗AEG□B
	3	42.5	45	30	AJE	325	975	5	22.4	20	NXB-700V305∗AJE□B
	4	42.5	43	42	AGK	325	1300	4	25	20	NXB-700V405∗AGK□B
850VDC (450VAC)	0.47	42.5	28	14	ABA	400	188	12	6.4	20	NXB-850V474∗ABA□B
	0.55	42.5	32	14	ACA	400	220	12	8.8	20	NXB-850V554∗ACA□B
	0.68	42.5	25.5	25.5	AAC	400	272	10	10.4	20	NXB-850V684∗AAC□B
	0.8	42.5	28	24	ABB	400	320	10	11.8	20	NXB-850V804∗ABB□B
	1.2	42.5	36	24	AFB	400	480	9	15.6	20	NXB-850V125∗AFB□B
	1.5	42.5	33	33	ADF	400	600	8	17.6	20	NXB-850V155∗ADF□B
	1.8	42.5	35.5	33.5	AEG	400	720	7	19.8	20	NXB-850V185∗AEG□B
	2.2	42.5	45	30	AJE	400	880	6	21.5	20	NXB-850V225∗AJE□B
	2.8	42.5	43	42	AGK	400	1120	5	24	20	NXB-850V285∗AGK□B
1000VDC (480VAC)	0.33	42.5	28	14	ABA	500	165	12	6.2	20	NXB-1000V334∗ABA□B
	0.45	42.5	32	14	ACA	500	225	12	8.6	20	NXB-1000V454∗ACA□B
	0.55	42.5	25.5	25.5	AAC	500	275	10	9.8	20	NXB-1000V554∗AAC□B
	0.65	42.5	28	24	ABB	500	325	10	11.6	20	NXB-1000V654∗ABB□B
	1	42.5	36	24	AFB	500	500	9	15.5	20	NXB-1000V105∗AFB□B
	1.2	42.5	33	33	ADF	500	600	8	17.5	20	NXB-1000V125∗ADF□B
	1.4	42.5	35.5	33.5	AEG	500	700	7	18.8	20	NXB-1000V145∗AEG□B
	1.8	42.5	45	30	AJE	500	900	6	21	20	NXB-1000V185∗AJE□B
	2.2	42.5	43	42	AGK	500	1100	5	5	20	NXB-1000V225∗AGK□B
	2.2	57.5	43.5	29.5	CHD	350	770	6	6	20	NXB-1000V225∗CHD□B
	2.5	57.5	45	30	CJE	350	875	5	5	20	NXB-1000V255∗CJE□B
	3	57.5	45	35	CJH	350	1050	5	5	20	NXB-1000V305∗CJH□B
	3.3	57.5	50	35	CKH	350	1155	4	4	20	NXB-1000V335∗CKH□B
	3.5	57.5	45	45	CJL	350	1225	4	4	20	NXB-1000V355∗CJL□B
	4.5	57.5	55	40	CLJ	350	1575	4	28	20	NXB-1000V455∗CLJ□B
1200VDC (500VAC)	0.22	42.5	28	14	ABA	650	143	12	6	20	NXB-1200V224∗ABA□B
	0.3	42.5	32	14	ACA	650	195	12	8.5	20	NXB-1200V304∗ACA□B
	0.4	42.5	25.5	25.5	AAC	650	260	11	9.6	20	NXB-1200V404∗AAC□B
	0.47	42.5	28	24	ABB	650	306	10	11.5	20	NXB-1200V474∗ABB□B
	0.68	42.5	36	24	AFB	650	442	10	15.4	20	NXB-1200V684∗AFB□B
	0.8	42.5	33	33	ADF	650	520	9	17.2	20	NXB-1200V804∗ADF□B
	1	42.5	35.5	33.5	AEG	650	650	8	18.6	20	NXB-1200V105∗AEG□B
	1.2	42.5	45	30	AJE	650	780	7	20.6	20	NXB-1200V125∗AJE□B
	1.5	42.5	43	42	AGK	650	975	6	22	20	NXB-1200V155∗AGK□B
	1.5	57.5	43.5	29.5	CHD	455	683	6	22	20	NXB-1200V155∗CHD□B
	1.8	57.5	45	30	CJE	455	819	6	23	20	NXB-1200V185∗CJE□B
	2	57.5	45	35	CJH	455	910	5	24	20	NXB-1200V205∗CJH□B
	2.2	57.5	50	35	CKH	455	1001	5	24	20	NXB-1200V225∗CKH□B
	2.5	57.5	45	45	CJL	455	1138	4	25	20	NXB-1200V255∗CJL□B
	3	57.5	55	40	CLJ	455	1365	4	26	20	NXB-1200V305∗CLJ□B
1600VDC (550VAC)	0.15	42.5	28	14	ABA	800	120	12	6	20	NXB-1600V154∗ABA□B
	0.2	42.5	32	14	ACA	800	160	12	8.4	20	NXB-1600V204∗ACA□B
	0.3	42.5	25.5	25.5	AAC	800	240	11	9.5	20	NXB-1600V304∗AAC□B
	0.33	42.5	28	24	ABB	800	264	11	11.4	20	NXB-1600V334∗ABB□B
	0.47	42.5	36	24	AFB	800	376	10	15.2	20	NXB-1600V474∗AFB□B
	0.56	42.5	33	33	ADF	800	448	10	17	20	NXB-1600V564∗ADF□B
	0.65	42.5	35.5	33.5	AEG	800	520	9	18.4	20	NXB-1600V654∗AEG□B
	0.8	42.5	45	30	AJE	800	640	8	20.5	20	NXB-1600V804∗AJE□B
	1	42.5	43	42	AGK	800	800	7	21	20	NXB-1600V105∗AGK□B
	1	57.5	43.5	29.5	CHD	560	560	6	22	20	NXB-1600V105∗CHD□B
	1.2	57.5	45	30	CJE	560	672	6	22	20	NXB-1600V125∗CJE□B
	1.4	57.5	45	35	CJH	560	784	5	23	20	NXB-1600V145∗CJH□B
	1.6	57.5	50	35	CKH	560	896	5	24	20	NXB-1600V165∗CKH□B
	1.7	57.5	45	45	CJL	560	952	4	24	20	NXB-1600V175∗CJL□B
	2	57.5	55	40	CLJ	560	1120	4	25	20	NXB-1600V205∗CLJ□B

(Note) ∗ : If tolerance at rated capacitance is 5% = J, 10% = K
□ : Shape code

1 The standard system of fixed plastic film capacitor for use in electronic equipment.

The standard system of fixed plastic film capacitor for use in electronic equipment includes the foundational standard, generic specification, sectional specification, blank detail specification and detail specification, or manufacturer specification.

Generic specification specifies the terminology, inspection procedures and test methods applied in sectional and detail specifications.
Sectional specification is classified according to the specific dielectric material and construction of capacitor, it prescribes preferred rating and characteristics and to elect from generic specification the appropriate quality assessment procedures, tests and measuring methods and to give general performance requirements for this type of capacitor.
Blank detail specification is a supplementary document to the sectional specification and contains requirements for style, layout and minimum contents of detail specifications.
Following please find the corresponding specification lists for plastic film capacitors.

No.	Standard
GB/T 2693 (IEC 60384-1)	Fixed capacitors for use in electronic equipment Part 1: Generic specification
GB/T 17702 (IEC 61071)	Power electronic capacitors
AEC-Q200	Stress test qualification for passive components
GB/T 25121 (IEC61881)	Railway applications - Rolling stock equipment - Capacitors for power electronics
GB/T21563 (IEC61373)	Railway applications - Rolling stock equipment Shock and vibration tests
GB/T 4798-1 (IEC 60721-3-1)	Classification of environmental conditions Part 3: Classification of groups of environmental parameters and their severities Section 1 Storage
GB/T 4798-2 (IEC60721-3-2)	Classification of environmental conditions Part 3: Classification of groups of environmental parameters and their severities Section 2 Transportation
GB/T 4798-3 (IEC 60721-3-3)	Classification of environmental conditions Part 3: Classification of groups of environmental parameters and their severities Section 3 Stationary use at weather protected locations

2 General Description of Film Capacitors

2-1 Principle of Capacitor Construction

The principle construction of a parallel plate capacitor is shown in Fig. 1.
When a voltage V is applied between the conducting electrodes placed opposite to each other, a certain amount Q of electric charge proportional to the voltage can be stored on the surfaces of the dielectric.
The proportional constant is called capacitance C, designating the ability of a capacitor to store energy in an electric field.

$Q=C \cdot V$
Q: Charge [Coulomb]
V: Voltage [Volt]
C: Capacitance [Farad]
The capacitance C of capacitor can be expressed by the following equation:



Fig.1

$C[F]=\varepsilon 0 \cdot \varepsilon \cdot A / d$
ε: dielectric constant
ε0: dielectric constant in vacuum (= 8.85×10^{-12} F/m)
A: electrode area [m^2]
d: electrode distance [m]

The dielectric constant of Polypropylene film is 2.2.
Larger capacitances can be obtained by entailing the electrode area A or by reducing the distanced.
Table 1 shows the dieiectric constants of typical film dielectrics used in capacitors.
In many cases, capacitor names are related to their dielectric material used.

Table-1

Dielectric	Dielectric Constant
Polypropylene	2.2
Polyester	3.3
Polyimide	3.5
Polyethylene	2.3
Polycarbonate	2.8
Polytetrafluoroethylene	2

The schematic of an film capacitoris shown in Fig. 2

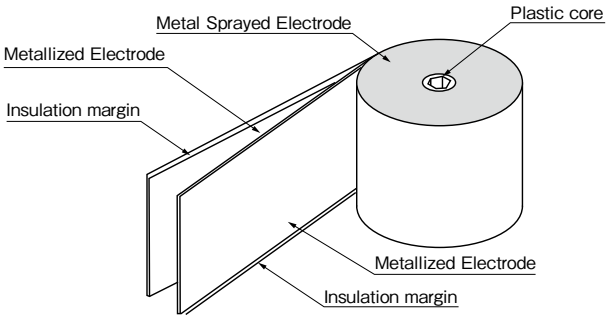

Fig-2

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

3 Basic parameters and terms

3-1 Rated capacitance C_R
Nominal value of the capacitance at 20°C and measuring frequency range of 50 to 120 Hz.

3-2 Rated voltage U_R
Maximum operating peak voltage of either polarity but of a non-reversing type waveform, for which the capacitor has been designed, for continuous operation.
It shall be higher than the sum of operating d.c. voltage and operating ripple peak voltage.

3-3 Ripple voltage Ur
Peak-to-peak alternating component of the unidirectional voltage.

3-4 Non-recurrent surge voltage Us
Peak voltage induced by a switching or any other disturbance of the system which is allowed for a limited number of times and for durations shorter than the basic period.
- Maximum duration: 50ms / pulse
- Maximum number of occurrences: 1000 (during load)

3-5 Insulation voltage Ui
Rms value of a.c. voltage designed for the insulation between terminals of the capacitor to case or earth.
The insulation voltage is equal to the rated voltage of the capacitor, divided by $\sqrt{2}$, unless otherwise specified.

3-6 Maximum current Imax
Maximum rms current for continuous operation.

3-7 Maximum rate of voltage rise dV/dt
Maximum permissible repetitive rate of voltage rise of the operational voltage.

3-8 Maximum peak current $\hat{I}$
Maximum permitted repetitive peak current that can occur during continuous operation.
The value is following: $\hat{I}=C_R$ X (dV/dt)

3-9 Maximum surge current $\hat{I}s$
Admissible peak current induced by a switching or any other disturbance of the system.
- Maximum duration: 50ms / pulse
- Maximum number of occurrences: 1000

3-10 Series resistance Rs
Effective ohmic resistance of the conductors of a capacitor under specified operating conditions.

3-11 Equivalent series resistance ESR
The equivalent series resistance (ESR) represents all of the ohmic losses of the capacitor.

$$ESR = \frac{tg\delta}{W \cdot C} = Rs + \frac{tg\delta 0}{W \cdot C}$$

3-12 Dielectric dissipation factor tgδ0
Constant dissipation factor of the dielectric material for all capacitors at their rated frequency.
The typical loss factor of polypropylene film is $2x10^{-4}$.

3-13 Loss factor of the capacitor tgδ
The dissipation factor is ratio between reactive power of the impedance of the capacitor and effective power when capacitor is submitted to a sinusoidal voltage of specified frequency, it is that ratio between the equivalent series resistance and the capacitive reactance of a capacitor.

3-14 Dielectric power loss Pd
Loss power induced by dielectric polarization or dielectric conductance.

3-15 Joule power loss Pj
Loss power induced by series resistance of the capacitor under rms current.

3-16 Capacitor losses Pi
Active power dissipated in the capacitor. Pt = I^2rms x ESR

3-17 Maximum power loss Pmax
Maximum power loss at which the capacitor may be operated at the maximum case temperature.

3-18 Self-inductance Ls
Represents the sum of all inductive elements which are for mechanical and construction reasons contained in any capacitor.

3-19 Resonance frequency fr
Lowest frequency at which the impedance of the capacitor becomes minimum.
The value is following : fr = 1/(2π x)

3-20 Ambient temperature Θ_A
Temperature of the air measured at the hottest position of the capacitor, under steady-state conditions, midway between two unite.
If only one unit is involved, it is the temperature of surrounding air, measured 10cm away and at 2/3 of the case height of the capacitor under steady-state conditions.

3-21 Maximum operating temperature Θ_{max}
Highest temperature of the case at which the capacitor may be operated.

3-22 Lowest operating temperature Θ_{min}
Lowest temperature of the dielectric at which the capacitor may be energized.

3-23 Thermal resistance R_{th}
The thermal resistance indicates by how many degrees the capacitor temperature at the hotspot rises above ΘA per watt of the heat dissipation loss.

3-24 Hotspot temperature Θ_{hs}
Temperature at the hottest spot inside the capacitor.
The value is following: $\Theta_{hs} = \Theta_A + P_t \times R_{th}$

3-25 Temperature coefficient of capacitance α
The change rate of capacitance with temperature measured over a specified range of temperature.

3-26 Voltage between terminals U_{TT}
Voltage between terminals.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

3-27 Voltage between terminals and case U_{TC}

Voltage between terminals and case.

3-28 Climatic category

The climatic category which the capacitor belongs to is expressed in three numbers separated by slashes, (I EC 60068-1 :example 40/85/56)

40 / 85 / 56
- 56 — days relevant to the damp heat test (56days)
- 85 — the upper category temperature (+85°C)
- 40 — the lower category temperature (-40°C)

3-29 Insulation Resistance (IR) /Time Constant (t)

The insulation resistance is the ratio between an applied D.C. voltage and the resulting leakage current after a minute of charge.
It is expressed in MΩ.
The time constant is expressed in seconds with the following formula: t [s]=IR [MΩ] x C [μF]

3-30 Self-healing (Only for metallized film capacitor)

Process by which the electrical properties of the capacitor, after a local breakdown of the dielectric, are rapidly and essentially restored to the values before the breakdown.
The metal coatings of the metallized film, which are vacuum-deposited directly onto the plastic film, have a thickness of only several tens nm.
At weak points or impurities in the dielectric, a dielectric breakdown would occur.
The energy released by the arc discharge in the breakdown channel is sufficient to totally evaporate the thin metal coating in the vicinity of the channel.
The insulated region thus resulting around the former faulty area will cause the capacitor to regain its full operation ability.

3-31 Failure rate λ

Failure rate refers to the work to a moment has not failed products, at that time, the failure probability of occurrence in a time unit.

$$\lambda = \frac{r}{n \cdot t}$$

t: test time
n: test number
r: number of failures

4 Expected lifetime of the capacitor

The expected lifetime of the capacitor depends on the applied voltage and the hot spot temperature during operation.
For capacitors applied in different situation, the designed average service lifes are different.
The capacitors used in DC-Link circuits will have a expected lifetime of probable 100000 hrs at rated voltage and 70t hot spot temperature.

4-1 The hotspot temperature estimation

During operation, the ripple current flowing through the capacitor will generate heat due to the series resistance (Rs) of the capacitor.
Considering the above factors hotspot temperature estimation formula is as follows:

$$\Theta_{hs} = \Theta_A + I_{rms} \times ESR \times R_{th}$$

Θ_{hs} : Hotspot Temperature
Θ_A : Environment Temperature
I_{rms} : Ripple Current
ESR : Equivalent series resistance
R_{th} : Thermal Resistance

4-2 Estimation of lifetime calculation

Considering the fever caused by ripple current, internal resistance (hotspot temperature), as well as the applied voltage, life estimation formula:

$$L = L_0 \times (U_R / U)^n \times 2^{(\Theta - \Theta_{hs}) / m}$$

L : The calculation of Lifetime, hrs
L_0 : Rated Lifetime (100000hrs)
U : Working Voltage, VDC
U_R : Rated Voltage, VDC
n : Acceleration Coefficient of Voltage, experienced value: 8-12
Θ_{hs} : The Actual or Calculated Hotspot Temperature, VC
Θ : Rated Hotspot Temperature, 70 °C
m : Acceleration Coefficient of Temperature, experienced value: 7-10

PS: Typically the capacity change rate> ± 3%, determined that product failure

Expected lifetime is a statistical value calculated on the basis of experience and on theoretical evaluations.
The above formula only as a theoretical reference.
The diagrams should be considered only as a theoretical reference.
Please consult our technical department in case of working condition different from the rated ones.

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

5 Electrical behaviour

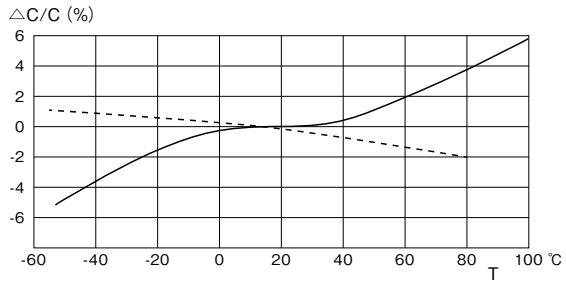

Capacitance vs. temperature at 1kHz

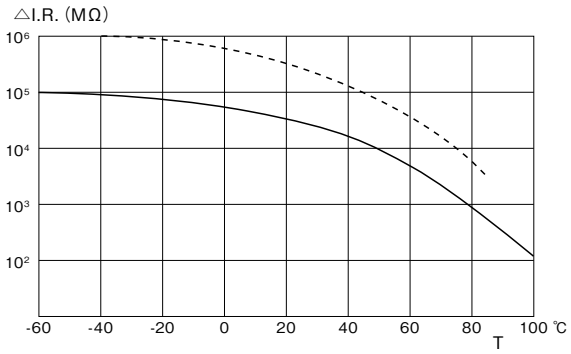

IR vs. temperature

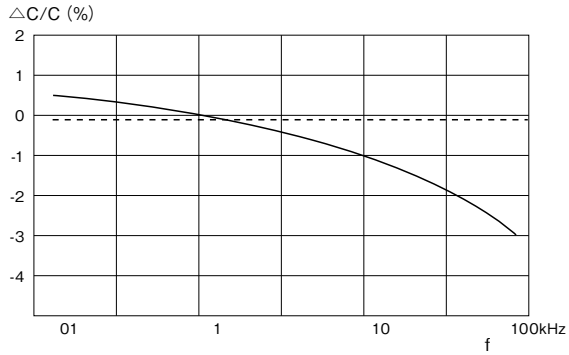

Capacitance vs. frequency (room temperature)

- - - - - - Polypropylene Film
——— Polyester Film

Expected life time curve

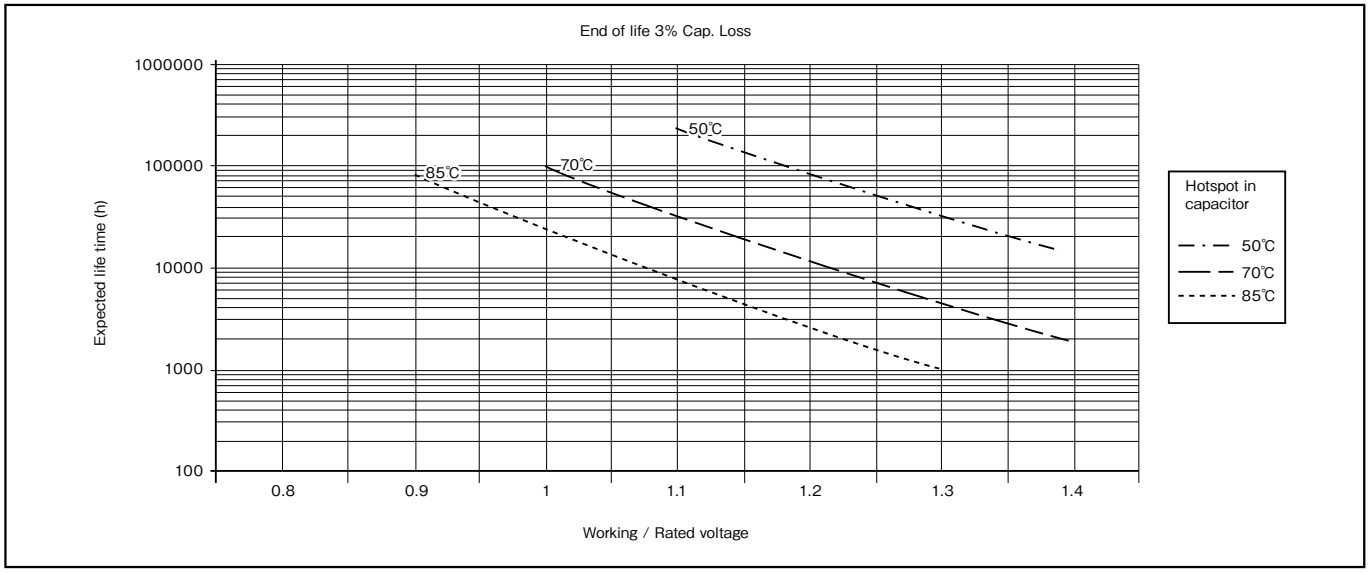

NOTE : Design, Specifications are subject to change without notice.
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.

ELECTRONIC COMPONENTS

ELNA CO., LTD.

http://www.elna.co.jp/

HEAD OFFICE	3-8-11 Shin-Yokohama, Kouhoku, Yokohama, Kanagawa 222-0033, Japan	TEL. +81-45-470-7251 FAX. +81-45-470-7261
SHIRAKAWA OFFICE	9-32 Sugiyama, Yone, Nishigo, Nishishirakawa, Fukushima 961-8031, Japan	TEL. +81-248-48-1654 FAX. +81-248-25-5614

■SALES OFFICE

ELNA AMERICA, INC.
3600 Dallas Hwy.,Ste.230 #389
Marietta, GA 30064, U.S.A.
TEL. +1-678-261-8284
FAX. +1-678-815-0892

ELNA ELECTRONICS SINGAPORE PTE. LTD.
103 Kallang Avenue,
#04-01 AIS Industrial Building
Singapore 339504
TEL. +65-62930181
FAX. +65-62966716

ELNA (SHANGHAI) CO., LTD.
Room 6203, Rui Jin Hotel Business Center 118
Rui Jin 2 Road, Shanghai, China
Post Code 200020
TEL. +86-21-64452269
FAX. +86-21-64452271

ELNA BANGKOK SALES OFFICE
2/71 Thosapol Land building 4
14th/FL, Soi Bangna-Trad 25, Bangna
Bangna, Bangkok 10260, Thailand
TEL. +66-2-7441464
+66-2-7441465
FAX. +66-2-7441466

ELNA MALAYSIA PENANG SALES OFFICE
2473, Tingkat Perusahaan 6,
Free Trade Zone, Prai Industrial Estate,
13600 Prai, Penang, Malaysia
TEL. +60-4-3985369

EASTERN JAPAN OFFICE
3-8-11 Shin-Yokohama, Kouhoku,
Yokohama, Kanagawa 222-0033, Japan
TEL. +81-45-470-7254
FAX. +81-45-470-7260

WESTERN JAPAN OFFICE
6-1-15 Nishinakajima Yodogawa,
Osaka, Osaka 532-0011, Japan
TEL. +81-6-6304-6831
FAX. +81-6-6304-8638

■AFFILIATED COMPANY

TANIN ELNA CO., LTD.
HEAD OFFICE
2/71 Thosapol Land building 4
14th/FL, Soi Bangna-Trad 25, Bangna
Bangna, Bangkok 10260, Thailand
TEL. +66-2-7441464
+66-2-7441465
FAX. +66-2-7441466

CHIANGMAI FACTORY
56 Mahidoal Road T.Sutep
A.Muang Chiangmai 50200, Thailand.
TEL. +66-53-270206
FAX. +66-53-275064

ELNA-SONIC SDN. BHD.
2473, Tingkat Perusahaan 6,
Free Trade Zone, Prai Industrial Estate,
13600 Prai, Penang, Malaysia.
TEL. +60-4-3992916
FAX. +60-4-3992925
Sales office TEL. +60-4-3985369

ELNA TOHOKU CO., LTD.
AOMORI FACTORY
1-349-1 Okonoki,
Kuroishi, Aomori 036-0357, Japan
TEL. +81-172-52-4166
FAX. +81-172-53-4609

CAUTION
Observe the following to ensure safe operation.

1. The models and specification values contained in this catalog are for reference purposes only. During actual use or when placing an order, please request "drawings"and make your purchase or use the purchased product based on those drawings.
2. In order to ensure that products are used correctly and safely, always make sure to read the cautions for using prior to using the product.

NOTE

1. Since the contents contained are subject to changes in specifications, dimensions and so forth without notice due to modification, please confirm the contents when placing an order.
   If any of the matters described here are unclear, please inquire at one of our nearby sales offices.
2. The contents of this catalog are valid as of December 2018.

CAT.No.2019/2020E