


Code in front of series have been extracted from product code, which describes the segment of products, such as type and features.

- Guaranteed 3000 hours at 135°C. (63V to 80V : 2000 hours)
- High temperature guaranteed for automotive.
- High CV, low ESR, high ripple current capacitors.
- For ECU of Direct injection engine, ESP etc.
- Environmental : GREEN CAP™, RoHS compliance.




Marking color : Black print

### Specifications

| Item                                                             | Performance                                                                                                                                                                                                                                                                                                                                                                                                                            |                                      |      |      |      |    |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
|------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|------|------|------|----|-------------------|--------------------------------------|----|----|----|----|------------------------|-----------------|-------------------------------------|------|------|------|---|--|----------------------------------|------------------------------|--|--|--|--|--|---------------------------|---------------------------------------------|--|--|--|--|--|
| Category temperature range (°C)                                  | -40 to +135                                                                                                                                                                                                                                                                                                                                                                                                                            |                                      |      |      |      |    |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
| Tolerance at rated capacitance (%)                               | ±20 (20°C,120Hz)                                                                                                                                                                                                                                                                                                                                                                                                                       |                                      |      |      |      |    |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
| Leakage current (µA) (max.)                                      | 0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (µF), V : Rated voltage (V) (20°C)                                                                                                                                                                                                                                                                                                                             |                                      |      |      |      |    |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
| Tangent of loss angle (tanδ)                                     | <table border="1"> <tr> <th>Rated voltage (V)</th> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> </tr> <tr> <th>tanδ (max.)</th> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> <td>0.08</td> </tr> </table>                                                                                                                                                                                                    |                                      |      |      |      |    | Rated voltage (V) | 25                                   | 35 | 50 | 63 | 80 | tanδ (max.)            | 0.14            | 0.12                                | 0.10 | 0.10 | 0.08 |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
|                                                                  | Rated voltage (V)                                                                                                                                                                                                                                                                                                                                                                                                                      | 25                                   | 35   | 50   | 63   | 80 |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
| tanδ (max.)                                                      | 0.14                                                                                                                                                                                                                                                                                                                                                                                                                                   | 0.12                                 | 0.10 | 0.10 | 0.08 |    |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
| 0.02 is added to every 1000µF increase over 1000µF. (20°C,120Hz) |                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                      |      |      |      |    |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
| Characteristics at high and low temperature                      | <table border="1"> <tr> <th>Rated voltage (V)</th> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> </tr> <tr> <th>Impedance ratio (max.)</th> <td>Z-40°C/Z+20°C</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>                                                                                                                                                                                 |                                      |      |      |      |    | Rated voltage (V) | 25                                   | 35 | 50 | 63 | 80 | Impedance ratio (max.) | Z-40°C/Z+20°C   | 3                                   | 3    | 3    | 3    | 3 |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
|                                                                  | Rated voltage (V)                                                                                                                                                                                                                                                                                                                                                                                                                      | 25                                   | 35   | 50   | 63   | 80 |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
| Impedance ratio (max.)                                           | Z-40°C/Z+20°C                                                                                                                                                                                                                                                                                                                                                                                                                          | 3                                    | 3    | 3    | 3    | 3  |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
| (120Hz)                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                      |      |      |      |    |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
| Endurance 1 (135°C) (Applied ripple current)                     | <table border="1"> <tr> <th>Test time</th> <td colspan="6">3000 hours (63V to 80V : 2000 hours)</td> </tr> <tr> <th>Leakage current</th> <td colspan="6">The initial specified value or less</td> </tr> <tr> <th>Percentage of capacitance change</th> <td colspan="6">Within ±30% of initial value</td> </tr> <tr> <th>Tangent of the loss angle</th> <td colspan="6">300% or less of the initial specified value</td> </tr> </table> |                                      |      |      |      |    | Test time         | 3000 hours (63V to 80V : 2000 hours) |    |    |    |    |                        | Leakage current | The initial specified value or less |      |      |      |   |  | Percentage of capacitance change | Within ±30% of initial value |  |  |  |  |  | Tangent of the loss angle | 300% or less of the initial specified value |  |  |  |  |  |
|                                                                  | Test time                                                                                                                                                                                                                                                                                                                                                                                                                              | 3000 hours (63V to 80V : 2000 hours) |      |      |      |    |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
|                                                                  | Leakage current                                                                                                                                                                                                                                                                                                                                                                                                                        | The initial specified value or less  |      |      |      |    |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
|                                                                  | Percentage of capacitance change                                                                                                                                                                                                                                                                                                                                                                                                       | Within ±30% of initial value         |      |      |      |    |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
| Tangent of the loss angle                                        | 300% or less of the initial specified value                                                                                                                                                                                                                                                                                                                                                                                            |                                      |      |      |      |    |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
| Endurance 2 (125°C) (Applied ripple current)                     | <table border="1"> <tr> <th>Test time</th> <td colspan="6">3000 hours (63V to 80V : 2000 hours)</td> </tr> <tr> <th>Leakage current</th> <td colspan="6">The initial specified value or less</td> </tr> <tr> <th>Percentage of capacitance change</th> <td colspan="6">Within ±30% of initial value</td> </tr> <tr> <th>Tangent of the loss angle</th> <td colspan="6">300% or less of the initial specified value</td> </tr> </table> |                                      |      |      |      |    | Test time         | 3000 hours (63V to 80V : 2000 hours) |    |    |    |    |                        | Leakage current | The initial specified value or less |      |      |      |   |  | Percentage of capacitance change | Within ±30% of initial value |  |  |  |  |  | Tangent of the loss angle | 300% or less of the initial specified value |  |  |  |  |  |
|                                                                  | Test time                                                                                                                                                                                                                                                                                                                                                                                                                              | 3000 hours (63V to 80V : 2000 hours) |      |      |      |    |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
|                                                                  | Leakage current                                                                                                                                                                                                                                                                                                                                                                                                                        | The initial specified value or less  |      |      |      |    |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
|                                                                  | Percentage of capacitance change                                                                                                                                                                                                                                                                                                                                                                                                       | Within ±30% of initial value         |      |      |      |    |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
| Tangent of the loss angle                                        | 300% or less of the initial specified value                                                                                                                                                                                                                                                                                                                                                                                            |                                      |      |      |      |    |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
| Shelf life (135°C)                                               | Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1                                                                                                                                                                                                                                                                                                            |                                      |      |      |      |    |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |
| Applicable standards                                             | JIS C5101 - 1, - 4 (IEC 60384 - 1, - 4)                                                                                                                                                                                                                                                                                                                                                                                                |                                      |      |      |      |    |                   |                                      |    |    |    |    |                        |                 |                                     |      |      |      |   |  |                                  |                              |  |  |  |  |  |                           |                                             |  |  |  |  |  |

### Outline Drawing

Unit : mm

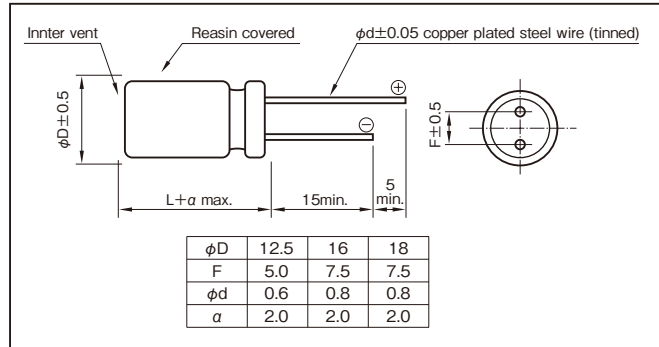

### Coefficient of Frequency for Rated Ripple Current

| Rated capacitance (µF) \ Frequency (Hz) | 50 · 60 | 120  | 1k   | 10k · 100k |
|-----------------------------------------|---------|------|------|------------|
| 270                                     | 0.55    | 0.65 | 0.85 | 1          |
| 390 to 1000                             | 0.70    | 0.75 | 0.90 | 1          |
| 1100 to 12000                           | 0.80    | 0.85 | 0.95 | 1          |

Product code system : 25V2000µF  
(\*For automotive: powertrain, safety)

| RA*           | RKC         | 202              | M             | 1T           | G20       | 300                           | T               |
|---------------|-------------|------------------|---------------|--------------|-----------|-------------------------------|-----------------|
| Category code | Series code | capacitance code | Cap tol. code | Voltage code | Size code | Lead-forming and packing code | Additional code |

- For details, refer to the various "Product Code System" pages.
  - Lead-forming and packing code on this page are for lead long and standard packing products.
- For standard packing, please refer to the "PACKING" page.

Code in front of series have been extracted from product code, which describes the segment of products, such as type and features.

### Standard Ratings

| Rated voltage (V) | Item      | 25 (1T)             |           |                          |       |                                           |           | 35 (1G)             |           |                          |       |                                           |           | 50 (1U)             |           |                          |       |                                           |       |
|-------------------|-----------|---------------------|-----------|--------------------------|-------|-------------------------------------------|-----------|---------------------|-----------|--------------------------|-------|-------------------------------------------|-----------|---------------------|-----------|--------------------------|-------|-------------------------------------------|-------|
|                   |           | Case<br>φD × L (mm) | Size code | ESR<br>(Ω max. / 100kHz) |       | Rated ripple current<br>(mA rms / 100kHz) |           | Case<br>φD × L (mm) | Size code | ESR<br>(Ω max. / 100kHz) |       | Rated ripple current<br>(mA rms / 100kHz) |           | Case<br>φD × L (mm) | Size code | ESR<br>(Ω max. / 100kHz) |       | Rated ripple current<br>(mA rms / 100kHz) |       |
|                   |           |                     |           | 20°C                     | -40°C | 135°C                                     | 125°C     |                     |           | 20°C                     | -40°C | 135°C                                     | 125°C     |                     |           | 20°C                     | -40°C | 135°C                                     | 125°C |
| 620               | —         | —                   | —         | —                        | —     | —                                         | —         | —                   | —         | —                        | —     | —                                         | 12.5 × 20 | G20                 | 0.073     | 0.88                     | 1470  | 2400                                      |       |
| 820               | —         | —                   | —         | —                        | —     | —                                         | —         | —                   | —         | —                        | —     | —                                         | 12.5 × 25 | G25                 | 0.058     | 0.67                     | 2260  | 3350                                      |       |
| 1000              | —         | —                   | —         | —                        | —     | —                                         | —         | —                   | —         | —                        | —     | —                                         | 16 × 20   | J20                 | 0.050     | 0.55                     | 1870  | 2960                                      |       |
| 1100              | —         | —                   | —         | —                        | —     | —                                         | —         | —                   | —         | —                        | —     | —                                         | 12.5 × 30 | G30                 | 0.048     | 0.52                     | 2520  | 4220                                      |       |
| 1300              | —         | —                   | —         | —                        | —     | —                                         | 12.5 × 20 | G20                 | 0.042     | 0.48                     | 1690  | 2760                                      | 12.5 × 35 | G35                 | 0.042     | 0.44                     | 2780  | 4810                                      |       |
|                   |           |                     |           |                          |       |                                           |           |                     |           |                          |       |                                           | 16 × 25   | J25                 | 0.042     | 0.44                     | 2500  | 4040                                      |       |
|                   |           |                     |           |                          |       |                                           |           |                     |           |                          |       |                                           | 18 × 20   | K20                 | 0.042     | 0.44                     | 2110  | 3130                                      |       |
| 1600              | —         | —                   | —         | —                        | —     | —                                         | —         | —                   | —         | —                        | —     | —                                         | 12.5 × 40 | G40                 | 0.037     | 0.36                     | 3020  | 5240                                      |       |
|                   |           |                     |           |                          |       |                                           |           |                     |           |                          |       |                                           | 16 × 31.5 | J31                 | 0.035     | 0.36                     | 2960  | 5130                                      |       |
| 1800              | —         | —                   | —         | —                        | —     | —                                         | 12.5 × 25 | G25                 | 0.033     | 0.30                     | 2010  | 3480                                      | 18 × 25   | K25                 | 0.033     | 0.32                     | 2530  | 4230                                      |       |
| 2000              | 12.5 × 20 | G20                 | 0.042     | 0.48                     | 1690  | 2760                                      | 16 × 20   | J20                 | 0.035     | 0.27                     | 2160  | 3040                                      | —         | —                   | —         | —                        | —     | —                                         |       |
| 2200              | —         | —                   | —         | —                        | —     | —                                         | 12.5 × 30 | G30                 | 0.028     | 0.24                     | 2900  | 4490                                      | 16 × 35.5 | J35                 | 0.029     | 0.27                     | 3160  | 5480                                      |       |
| 2400              | —         | —                   | —         | —                        | —     | —                                         | 18 × 20   | K20                 | 0.034     | 0.22                     | 2320  | 3250                                      | 18 × 31.5 | K31                 | 0.028     | 0.25                     | 3020  | 5240                                      |       |
| 2700              | —         | —                   | —         | —                        | —     | —                                         | 12.5 × 35 | G35                 | 0.025     | 0.21                     | 3190  | 5140                                      | 16 × 40   | J40                 | 0.025     | 0.22                     | 3420  | 5930                                      |       |
| 3000              | 12.5 × 25 | G25                 | 0.033     | 0.30                     | 2010  | 3480                                      | 16 × 25   | J25                 | 0.028     | 0.22                     | 2870  | 4260                                      | 18 × 35.5 | K35                 | 0.024     | 0.20                     | 3390  | 5870                                      |       |
| 3300              | 16 × 20   | J20                 | 0.035     | 0.27                     | 2160  | 3040                                      | 12.5 × 40 | G40                 | 0.024     | 0.19                     | 3470  | 5810                                      | —         | —                   | —         | —                        | —     | —                                         |       |
| 3600              | 12.5 × 30 | G30                 | 0.028     | 0.24                     | 2900  | 4490                                      | 16 × 31.5 | J31                 | 0.023     | 0.18                     | 3400  | 5480                                      | 18 × 40   | K40                 | 0.023     | 0.16                     | 3700  | 6420                                      |       |
| 3900              | —         | —                   | —         | —                        | —     | —                                         | 18 × 25   | K25                 | 0.027     | 0.19                     | 2900  | 4500                                      | —         | —                   | —         | —                        | —     | —                                         |       |
| 4300              | 18 × 20   | K20                 | 0.034     | 0.22                     | 2320  | 3250                                      | 16 × 35.5 | J35                 | 0.020     | 0.14                     | 3630  | 6070                                      | —         | —                   | —         | —                        | —     | —                                         |       |
| 4700              | 12.5 × 35 | G35                 | 0.025     | 0.21                     | 3190  | 5140                                      | 18 × 31.5 | K31                 | 0.022     | 0.16                     | 3470  | 5600                                      | —         | —                   | —         | —                        | —     | —                                         |       |
|                   |           |                     |           |                          |       |                                           |           |                     |           |                          |       |                                           | 16 × 25   | J25                 | 0.028     | 0.22                     | 2870  | 4260                                      |       |
| 5100              | 12.5 × 40 | G40                 | 0.024     | 0.19                     | 3470  | 5810                                      | —         | —                   | —         | —                        | —     | —                                         | —         | —                   | —         | —                        | —     | —                                         |       |
| 5600              | 16 × 31.5 | J31                 | 0.023     | 0.18                     | 3400  | 5480                                      | 16 × 40   | J40                 | 0.019     | 0.12                     | 3930  | 6810                                      | —         | —                   | —         | —                        | —     | —                                         |       |
| 6200              | —         | —                   | —         | —                        | —     | —                                         | 18 × 35.5 | K35                 | 0.019     | 0.12                     | 3750  | 6280                                      | —         | —                   | —         | —                        | —     | —                                         |       |
| 7500              | 16 × 35.5 | J35                 | 0.020     | 0.14                     | 3630  | 6070                                      | 18 × 40   | K40                 | 0.018     | 0.10                     | 4080  | 7070                                      | —         | —                   | —         | —                        | —     | —                                         |       |
|                   |           |                     |           |                          |       |                                           |           |                     |           |                          |       |                                           | 18 × 31.5 | K31                 | 0.022     | 0.16                     | 3470  | 5600                                      |       |
| 9100              | 16 × 40   | J40                 | 0.019     | 0.12                     | 3930  | 6810                                      | —         | —                   | —         | —                        | —     | —                                         | —         | —                   | —         | —                        | —     | —                                         |       |
| 10000             | 18 × 35.5 | K35                 | 0.019     | 0.12                     | 3750  | 6280                                      | —         | —                   | —         | —                        | —     | —                                         | —         | —                   | —         | —                        | —     | —                                         |       |
| 12000             | 18 × 40   | K40                 | 0.018     | 0.10                     | 4080  | 7070                                      | —         | —                   | —         | —                        | —     | —                                         | —         | —                   | —         | —                        | —     | —                                         |       |

| Rated voltage (V) | Item      | 63 (4E)             |           |                          |       |                                           |           | 80 (1R)             |           |                          |       |                                           |           |
|-------------------|-----------|---------------------|-----------|--------------------------|-------|-------------------------------------------|-----------|---------------------|-----------|--------------------------|-------|-------------------------------------------|-----------|
|                   |           | Case<br>φD × L (mm) | Size code | ESR<br>(Ω max. / 100kHz) |       | Rated ripple current<br>(mA rms / 100kHz) |           | Case<br>φD × L (mm) | Size code | ESR<br>(Ω max. / 100kHz) |       | Rated ripple current<br>(mA rms / 100kHz) |           |
|                   |           |                     |           | 20°C                     | -40°C | 135°C                                     | 125°C     |                     |           | 20°C                     | -40°C | 135°C                                     | 125°C     |
| 270               | —         | —                   | —         | —                        | —     | —                                         | 12.5 × 20 | G20                 | 0.072     | 0.56                     | 1420  | 1640                                      |           |
| 390               | 12.5 × 20 | G20                 | 0.072     | 0.56                     | 1420  | 1640                                      | 12.5 × 25 | G25                 | 0.052     | 0.39                     | 2050  | 2520                                      |           |
| 470               | —         | —                   | —         | —                        | —     | —                                         | 16 × 20   | J20                 | 0.053     | 0.34                     | 1910  | 2140                                      |           |
| 510               | —         | —                   | —         | —                        | —     | —                                         | 12.5 × 30 | G30                 | 0.042     | 0.30                     | 2630  | 3110                                      |           |
| 560               | 12.5 × 25 | G25                 | 0.052     | 0.39                     | 2050  | 2520                                      | —         | —                   | —         | —                        | —     | —                                         |           |
| 620               | —         | —                   | —         | —                        | —     | —                                         | 12.5 × 35 | G35                 | 0.035     | 0.25                     | 2970  | 3760                                      |           |
|                   |           |                     |           |                          |       |                                           | 18 × 20   | K20                 | 0.044     | 0.26                     | 2100  | 2350                                      |           |
| 680               | 16 × 20   | J20                 | 0.053     | 0.34                     | 1910  | 2140                                      | 16 × 25   | J25                 | 0.038     | 0.23                     | 2680  | 2940                                      |           |
| 750               | 12.5 × 30 | G30                 | 0.042     | 0.30                     | 2630  | 3110                                      | 12.5 × 40 | G40                 | 0.031     | 0.22                     | 3260  | 4610                                      |           |
|                   |           |                     |           |                          |       |                                           | 16 × 31.5 | J31                 | 0.034     | 0.20                     | 3050  | 3860                                      |           |
| 820               | —         | —                   | —         | —                        | —     | —                                         | 18 × 25   | K25                 | 0.033     | 0.19                     | 2810  | 3080                                      |           |
| 910               | 12.5 × 35 | G35                 | 0.035     | 0.25                     | 2970  | 3760                                      | —         | —                   | —         | —                        | —     | —                                         |           |
|                   |           |                     |           |                          |       |                                           | 18 × 20   | K20                 | 0.044     | 0.26                     | 2100  | 2350                                      |           |
| 1000              | 16 × 25   | J25                 | 0.038     | 0.23                     | 2680  | 2940                                      | 16 × 35.5 | J35                 | 0.027     | 0.15                     | 3420  | 4590                                      |           |
| 1100              | 12.5 × 40 | G40                 | 0.031     | 0.22                     | 3260  | 4610                                      | 18 × 31.5 | K31                 | 0.028     | 0.15                     | 3220  | 4080                                      |           |
| 1200              | 16 × 31.5 | J31                 | 0.034     | 0.20                     | 3050  | 3860                                      | —         | —                   | —         | —                        | —     | —                                         |           |
| 1300              | 18 × 25   | K25                 | 0.033     | 0.19                     | 2810  | 3080                                      | 16 × 40   | J40                 | 0.025     | 0.14                     | 3670  | 5190                                      |           |
|                   |           |                     |           |                          |       |                                           | 18 × 35.5 | K35                 | 0.022     | 0.12                     | 3690  | 5220                                      |           |
| 1600              | 16 × 35.5 | J35                 | 0.027     | 0.15                     | 3420  | 4590                                      | 18 × 40   | K40                 | 0.021     | 0.11                     | 3820  | 5660                                      |           |
|                   |           |                     |           |                          |       |                                           |           |                     |           |                          |       |                                           | 18 × 31.5 |
| 1800              | 16 × 40   | J40                 | 0.025     | 0.14                     | 3670  | 5190                                      | —         | —                   | —         | —                        | —     | —                                         |           |
| 2200              | 18 × 35.5 | K35                 | 0.022     | 0.12                     | 3690  | 5220                                      | —         | —                   | —         | —                        | —     | —                                         |           |
| 2400              | 18 × 40   | K40                 | 0.021     | 0.11                     | 3820  | 5660                                      | —         | —                   | —         | —                        | —     | —                                         |           |

NOTE : Design, Specifications are subject to change without notice.  
It is recommended that you shall obtain technical specifications from ELNA to ensure that the component is suitable for your use.